



PROJECTION OF GREENHOUSE GASES 2025-2050

Scientific Report from DCE – Danish Centre for Environment and Energy

No. xxx

20xx



AARHUS
UNIVERSITY

DCE – DANISH CENTRE FOR ENVIRONMENT AND ENERGY

PROJECTION OF GREENHOUSE GASES 2025-2050

Scientific Report from DCE – Danish Centre for Environment and Energy

No. 714

2026

Ole-Kenneth Nielsen
Marlene S. Plejdrup
Morten Winther
Katja H. Hjelgaard
Malene Nielsen
Mette H. Mikkelsen
Rikke Albrechtsen
Trine A.V. Andersen
Stine L. Tougaard
Steen Gyldenkerne
Gregor Levin

Aarhus University, Department of Environmental Science



AARHUS
UNIVERSITY

DCE – DANISH CENTRE FOR ENVIRONMENT AND ENERGY

Data sheet

Series title and no.:	Scientific Report from DCE – Danish Centre for Environment and Energy No. 714
Category:	Scientific advisory report
Title:	Projection of greenhouse gases 2025-2050
Authors:	Ole-Kenneth Nielsen, Marlene S. Plejdrup, Morten Winther, Katja H. Hjelgaard, Malene Nielsen, Mette H. Mikkelsen, Rikke Albrektsen, Trine A.V. Andersen, Stine L. Tougaard, Steen Gyldenkaerne, Gregor Levin
Institution:	Aarhus University - Department of Environmental Science
Publisher:	Aarhus University, DCE – Danish Centre for Environment and Energy ©
URL:	http://dce.au.dk/en
Year of publication:	September 2026
Editing completed:	September 2026
Referees:	Marlene S. Plejdrup & Ole-Kenneth Nielsen
Quality assurance, DCE:	Vibeke Vestergaard Nielsen
External comments:	Ministry of Climate, Energy and Utilities The comments can be found here
Financial support:	Project has been funded by the Ministry of Climate, Energy and Utilities
Please cite as:	Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K.H., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Andersen, T.A.V., Tougaard, S.L., Gyldenkaerne, S., & Levin, G. 2025. Projection of greenhouse gases 2025-2050. Aarhus University, DCE – Danish Centre for Environment and Energy, 151 pp. Scientific Report No. 714 .
	Reproduction permitted provided the source is explicitly acknowledged
Abstract:	This report contains a description of models, background data and projections of CO ₂ , CH ₄ , N ₂ O, HFCs, PFCs and SF ₆ for Denmark. The emissions are projected to 2050 using a 'with measures' scenario. Official Danish projections of activity rates are used in the models for those sectors for which projections are available, e.g. the latest official projection from the Danish Energy Agency. The emission factors refer to international guidelines, and some are country-specific and refer to Danish legislation, Danish research reports or calculations based on emission data from a considerable number of industrial plants. The projection models are based on the same structure and method as the Danish emission inventories in order to ensure consistency.
Keywords:	Greenhouse gases, projections, emissions, CO ₂ , CH ₄ , N ₂ O, HFCs, PFCs, SF ₆
Layout:	Ann-Katrine Holme Christoffersen, Aarhus University, Department of Environmental Science
Front page photo:	Ann-Katrine Holme Christoffersen, Aarhus University, Department of Environmental Science (View to the Bay of Sæne, Baltic Sea)
ISBN:	978-87-7648-089-9
ISSN (electronic):	2244-9981
Number of pages:	151

Contents

List of abbreviations	6
Preface	8
Summary	9
Stationary combustion	10
Fugitive emissions from fuels	10
Industrial processes and product use	10
Transport and other mobile sources	10
Agriculture	11
Waste	11
LULUCF	11
Sammenfatning	12
Stationær forbrænding	13
Flygtige emissioner	13
Industriprocesser og anvendelse af produkter	13
Transport og andre mobile kilder	13
Landbrug	14
Affald ¹⁴	
LULUCF	14
1 Introduction	15
1.1 Obligations	15
1.2 Greenhouse gases	15
1.3 Historical emission data	16
1.4 Projection models	19
1.5 References	20
2 Stationary combustion	24
2.1 Methodology	24
2.2 Sources	24
2.3 Fuel consumption	25
2.4 Emission factors	26
2.5 Emissions	27
2.6 Recalculations	32
2.7 References	32
3 Oil and gas extraction (Fugitive emissions from fuels)	34
3.1 Methodology	34
3.2 Activity data	35
3.3 Emission factors	36
3.4 Emissions	36
3.5 Model description	39
3.6 References	40
4 Industrial processes and product use	41

4.1	Sources	41
4.2	Methodology	41
4.3	Emissions	47
4.4	Recalculations	50
4.5	References	51
5	Transport and other mobile sources	52
5.1	Methodology and references for road transport	53
5.2	Other mobile sources	67
5.3	Fuel consumption and emission results	77
5.4	Model structure for the DEMOS mobile emission models	80
5.5	References	80
6	Agriculture	84
6.1	Projected agricultural emission 2025 - 2050	85
6.2	Comparison with previous projection	86
6.3	Methodology	90
6.4	Livestock production	91
6.5	Emission reducing measures	95
6.6	Agricultural soils	99
6.7	Results	104
6.8	References	106
7	Waste	111
7.1	Emission overview	111
7.2	Solid waste disposal on land	111
7.3	Biological Treatment of Solid Waste	115
7.4	Waste Incineration	117
7.5	Wastewater handling	118
7.6	Other	122
7.7	Source specific recalculations	123
7.8	References	124
8	LULUCF	125
8.1	Projected land use and land use changes	125
8.2	Projected LULUCF emissions 2025 - 2050	127
8.3	Forest land	131
8.4	Cropland	132
8.5	Grassland	137
8.6	Wetlands	137
8.7	Settlements	140
8.8	Other Land	140
8.9	Fires	140
8.10	Harvested Wood Products	141
8.11	Emission	141
8.12	Recalculations	141
8.13	Uncertainty	142
8.14	The Danish commitment under the European Union in the second compliance period up until 2030	142
8.15	References	144
9	Conclusions	147

9.1	Stationary combustion	147
9.2	Fugitive emissions from fuels	148
9.3	Industrial processes and product use	148
9.4	Transport and other mobile sources	149
9.5	Agriculture	149
9.6	Waste	150
9.7	LULUCF	150
9.8	EU ETS	151

List of abbreviations

ARD	Afforestation, Reforestation & Deforestation
BOD	Biological Oxygen Demand
C	Carbon
CH ₄	Methane
CHP	Combined Heat and Power
CHR	Central Husbandry Register
CO ₂	Carbon dioxide
COD	Chemical Oxygen Demand
COPERT	COmputer Programme to calculate Emissions from Road Transport
CORINAIR	CORe INventory on AIR emissions
CRF	Common Reporting Format
CL	Cropland
CO ₂ e	Equivalents of carbon dioxide
DCA	Danish Centre for Food and Agriculture
DCE	Danish Centre for Environment and Energy
DEA	Danish Energy Agency
DEPA	Danish Environmental Protection Agency
DM	Dry Matter
DSt	Statistics Denmark
EEA	European Environment Agency
EIONET	European Environment Information and Observation Network
EMEP	European Monitoring and Evaluation Programme
ENVS	Department of Environmental Science, Aarhus University
EU ETS	European Union Emission Trading Scheme
FL	Forest land
FOD	First Order Decay
FSE	Full Scale Equivalent
GHG	Green House Gas
GL	Grassland
GWP	Global Warming Potential
HWP	Harvested Wood Products
HFCs	Hydrofluorocarbons
IDA	Integrated Database model for Agricultural emissions
IEF	Implied Emission Factor
IPCC	Intergovernmental Panel on Climate Change
LUC	Land Use Conversion
LUM	Land Use Matrix
LPG	Liquefied Petroleum Gas
LTO	Landing and Take Off
LULUCF	Land Use, Land-Use Change and Forestry
MCF	Methane Conversion Factor
MSW	Municipal Solid Waste
N	Nitrogen
N ₂ O	Nitrous oxide
NFI	National Forest Inventory
NIR	National Inventory Report
OC	Organic carbon
ODS	Ozone Depleting Substance
OL	Other Land
P	Phosphorus

PFCs	Perfluorocarbons
SE	Settlements
SOC	Soil Organic Carbon
SF ₆	Sulphur hexafluoride
SNAP	Selected Nomenclature for Air Pollution
SWDS	Solid Waste Disposal Sites
UNFCCC	United Nations Framework Convention on Climate Change
WE	Wetlands
WWTP	WasteWater Treatment Plant

Preface

This report contains a description of models and background data for projection of carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), hydrofluorocarbons (HFCs), perfluorocarbons (PFCs) and sulphur hexafluoride (SF₆) for Denmark. The emissions are projected to 2050 using a baseline scenario, which includes the estimated effects of policies and measures implemented in Denmark's greenhouse gas (GHG) emissions ('frozen policy' or 'with existing measures' projection) – meaning that the policies and measures are implemented or decided by December 2025.

DCE – Danish Centre for Environment and Energy, Aarhus University, has conducted the study. The project has been financed by the Danish Energy Agency (DEA).

This report has been made with contributions from several authors; the table below indicates the specific responsibilities for each chapter and the person responsible for providing a peer-review of that specific chapter.

Table 0.1 List of authors and reviewers.

Chapter	Authors	Reviewer
1	Ole-Kenneth Nielsen	Marlene S. Plejdrup
2	Malene Nielsen	Ole-Kenneth Nielsen
3	Marlene S. Plejdrup	Ole-Kenneth Nielsen
4	Katja Hjelgaard	Ole-Kenneth Nielsen
5	Morten Winther	Ole-Kenneth Nielsen
6	Mette H. Mikkelsen & Rikke Albrechtsen	Ole-Kenneth Nielsen
7	Katja Hjelgaard	Ole-Kenneth Nielsen
8	Steen Gyldenkerne	Ole-Kenneth Nielsen

As to the summary and conclusions (Chapter 9), all authors are responsible for the content.

The authors would like to thank:

The Danish Energy Agency (DEA) - for providing the energy consumption projection, the oil and gas projection and for valuable discussions during the project.

The Agency for Green Transition and Aquatic Environment (SGAV), for providing data on expected national agricultural policies and interpretation of the EU Common Agricultural Policy 2023-2027 and its impact on future land use.

Danish Centre for food and Agriculture (DCA) and the Knowledge Centre for Agriculture, the Danish Agricultural Advisory Service (DAAS) for providing data for the agricultural sector.

Tomas Sander Poulsen from Provice for the cooperation on the Danish emissions and projections of fluorinated gases.

Department of Geosciences and Natural Resource Management, Copenhagen University, for cooperation in the preparation of the Danish GHG inventory where the department carry out projections of emissions/removals from the forest category.

Summary

This report contains a description of the models, background data and projections of the greenhouse gases (GHG) carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), hydrofluorocarbons (HFCs), perfluorocarbons (PFCs) and sulphur hexafluoride (SF₆) for Denmark. The latest historic year that has formed the basis of the projection is 2024. The emissions are projected to 2050 using a scenario, which includes the estimated effects of policies and measures implemented in Denmark's greenhouse gas (GHG) emissions based on 'frozen policy' (or 'with existing measures' projection) – meaning that the policies and measures are implemented or decided by December 2025. The official Danish energy projection, e.g. the latest official projection from the Danish Energy Agency (DEA), is used to provide activity rates (2025-2050) in the models for those sectors for which these projections are available. The emission factors refer to international guidelines or are country-specific and refer to Danish legislation, Danish research reports or calculations based on emission data from a considerable number of industrial plants in Denmark. The projection models are generally based on the same structure and methodology as the Danish emission inventories in order to ensure consistency.

The main emitting sectors in 2024 are Energy industries (17 %), Transport (29 %), Agriculture (31 %) and Other sectors (8 %). For the latter sector, the most important sources are fuel combustion in the residential sector. GHG emissions show a decreasing trend in the projection period. The total emissions in 2024 are estimated to be 36.6 million tonnes CO₂ equivalents including LULUCF and indirect CO₂ and the corresponding total in 2050 is projected to be 10.5 million tonnes CO₂ equivalents. From 1990 to 2024 the emissions decreased by 52.3 %. From 2024 to 2050, the emission is projected to decrease by approximately 71 %.

The total greenhouse gas emissions in 1990 including LULUCF and indirect CO₂ are estimated at 78.5 million tonnes of CO₂ equivalents and the emission in 2030 is projected to be 25.5 million tonnes of CO₂ equivalents including LULUCF and indirect CO₂. This corresponds to a reduction of 67.5 % between 1990 and 2030. The effect of carbon capture and storage (CCS) in the projection is not attributable to any sector and not included in this figure.

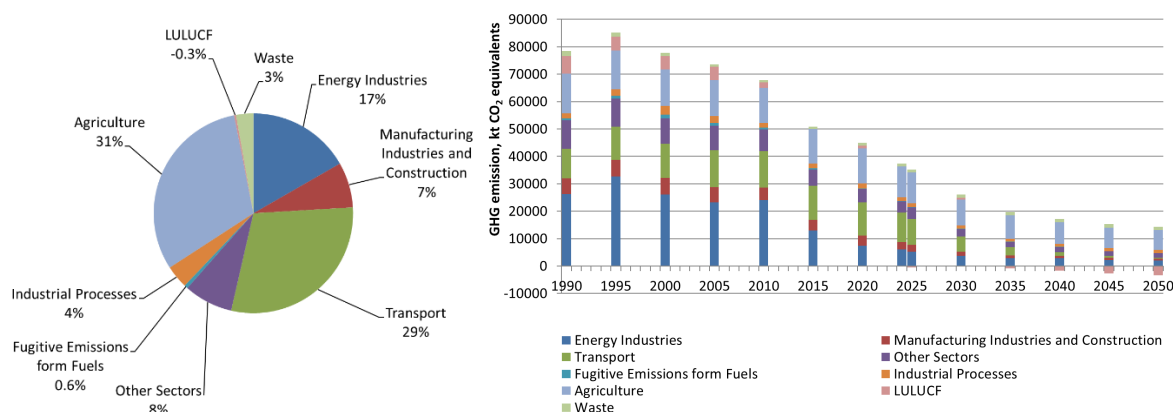


Figure S.1 Total GHG emissions in CO₂ equivalents. Distribution according to main sectors (2024) and time series for 1990 to 2050.

Stationary combustion

Stationary combustion includes Energy industries, Manufacturing industries and construction and Other sectors. Other sectors include combustion in commercial/institutional, residential and agricultural plants. The GHG emissions in 2024 from the main source, which is public power and heat production (45 %), are estimated to decrease in the period from 2024 to 2050 (64 %) due to a significant decrease in the fossil fuel consumption for electricity production in the later part of the time series. For residential combustion plants, a significant decrease in emissions is also projected; the emissions are expected to decrease by 91 % from 2024 to 2050, due to a lower consumption of fossil fuels. Emissions from manufacturing industries decrease by 80 %, also due to a decrease in fossil fuel combustion.

Fugitive emissions from fuels

The greenhouse gas emissions from the sector "Fugitive emissions from fuels" show large fluctuations in the historical years 1990-2024, due to emissions from exploration, which occur only in some years with varying amounts of oil and gas flared. Emissions from exploration are not included in the projection, as no projected activity data are available. Emissions are estimated to decrease in the projection period 2024-2050 by 82 %. The emissions from flaring are increasing in the first part of the projection period due to restart of production at the Tyra field after renovation. However, the emissions decrease again. Emissions from extraction of oil and natural gas are estimated to decline over the projection period due to the expectation of a decrease of extracted amounts of natural gas. Emissions of greenhouse gases from other sources are estimated to be constant or nearly constant over the projection period.

Industrial processes and product use

The GHG emission from industrial processes and product use (IPPU) increased during the nineties, reaching a maximum in 2000. Closure of a nitric acid/fertiliser plant in 2004 has resulted in a considerable decrease in the GHG emission. The most significant sources of GHG emission in 2024 are mineral industry (mainly cement production) with 69 % and use of substitutes (F-gases) for ozone depleting substances (ODS) (20 %). The corresponding shares in 2050 are expected to be 86 % and 0 %, respectively. Consumption of limestone and the emission of CO₂ from flue gas cleaning are assumed to follow the consumption of coal and waste for generation of heat and power. The GHG emissions from the IPPU sector will continue to be strongly dependent on the cement production at Denmark's only cement plant.

Transport and other mobile sources

Road transport is the main source of GHG emissions from transport and other mobile sources in 2024 (79 %) and emissions from this source are expected to decrease in the projection period to 2050, but with the largest reduction happening after 2030. The emission shares for the remaining mobile sources (e.g. domestic aviation, national navigation, railways, fishing and non-road machinery in industry, households and agriculture) are small compared with road transport. Non-road machinery in agriculture, forestry and fishing contributes 8 % of the sectoral GHG emission in 2024.

Agriculture

The main sources in 2024 are agricultural soils (33 %), enteric fermentation (34 %) and manure management (31 %). The corresponding shares in 2050 are expected to be 36 %, 37 % and 25 %, respectively. From 1990 to 2024, the emission of GHGs in the agricultural sector decreased by 22 %. From 2024 to 2050, the emissions are expected to decline by about 36 %. The reduction in the historical years (1990-2024) can mainly be explained by improved utilisation of nitrogen in manure, a significant reduction in the use of fertiliser and a reduced emission from N-leaching. Measures in the form of technologies to reduce emissions in housing and manure storage and emission reducing feed additives are considered in the projections.

Waste

The total GHG emission from the waste sector has been decreasing in the years 1990 to 2024 by 38 %. From 2024 to 2050, the emissions are projected to increase by 16 % driven by a significant increase in emissions from anaerobic digestion. Historically, solid waste disposal has been the largest contributor of GHG emission in the waste sector, but emissions from the source are decreasing and will decrease by another 28% from 2024-2050. In 2024, the most significant source category in the waste sector is anaerobic digestion (41%) and this picture will continue in the future (52 % by 2050). Emissions from wastewater, composting and other (accidental fires) are expected to be rather constant for the projection period. GHG emissions from these three source categories in 2025-2050 contribute with 17-18 %, 10-12 % and 9-10 % respectively.

LULUCF

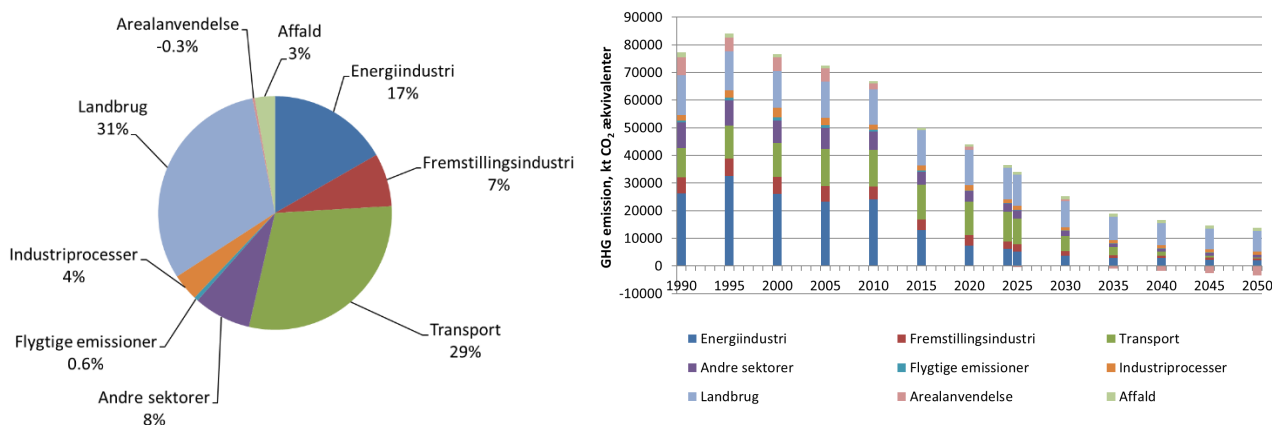
The LULUCF sector cover emissions and removals from land use, land use change and forestry. This includes conversions between Forest land (afforestation and deforestation), Cropland, Grassland, Wetlands, Settlement and Other land. The minor emission sources Harvested Wood Products (HWP) and burning of biomass in fires are also part of LULUCF. The work for this report includes the projection of Cropland, Grassland, Wetland, Settlement and Other land. Projection of Forestry and Harvested wood products (HWP) is conducted by Department of Geosciences and Natural Resource Management (IGN), Copenhagen University, and reported separately. The data included here are updated values for 2024 to 2050 received from IGN. The LULUCF sector excl. forestry and HWP is a net source of emissions in both the historical and projection period. Forestry and HWP are both net sinks and counter emissions lowering the net emissions from the entire LULUCF sector and even resulting in an overall sink. The combined emissions of the LULUCF sector were 6440 kt CO₂ equivalents in 1990 and reduced to a sink of 116 kt CO₂ equivalents in 2024. In 2030, a small net source of 727 kt CO₂ equivalents is estimated. From 2030 and up to 2050 is estimated a combined large sink of up to 3400 kt CO₂ equivalents due to less drained organic soils emitting CO₂ and a further increase in the amount of C stored in the Danish forests.

Sammenfatning

Denne rapport indeholder en beskrivelse af modeller, baggrundsdata og fremskrivninger af de danske emissioner af drivhusgasserne kuldioxid (CO₂), metan (CH₄), lattergas (N₂O), de fluorerede drivhusgasser HFC'ere, PFC'ere, svovlhexafluorid (SF₆). Det seneste historiske år ved udarbejdelsen af fremskrivningen var 2024. Emissionerne er fremskrevet til 2050 på baggrund af et scenarie, som medtager de estimerede effekter på Danmarks drivhusgasudledninger af virkemidler iværksat eller besluttet indtil december 2025 (såkaldt "frozen policy" eller "med eksisterende virkemidler" fremskrivning). I modellerne er der, for de sektorer, hvor det er muligt, anvendt officielle danske fremskrivninger af aktivitetsdata, f.eks. er den seneste officielle energifremskrivning fra Energistyrelsen (2025-2050) anvendt. Emissionsfaktorerne referer enten til internationale vejledninger, dansk lovgivning, danske rapporter eller er baseret på målinger på danske anlæg. Fremskrivningsmodellerne bygger på samme struktur og metoder, som er anvendt for de danske emissionsopgørelser, hvilket sikrer, at historiske og fremskrevne emissionsopgørelser er konsistente.

De vigtigste sektorer i forhold til emission af drivhusgas i 2024 er energisektoren (17 %), transport (29 %), landbrug (31 %), og andre sektorer (8 %). For "andre sektorer", er den vigtigste kilde forbrænding i husholdninger (Figur R.1). Drivhusgasemissionerne viser et fald gennem fremskrivningsperioden. De totale emissioner er beregnet til 36,6 millioner tons CO₂-ækvivalenter i 2024 inklusiv LULUCF og indirekte CO₂ og er fremskrevet til 10,5 millioner tons i 2050 inklusiv LULUCF og indirekte CO₂. Fra 1990 til 2024 er emissionerne faldet med 53,3 %. Fra 2024 til 2050 er den fremskrevne reduktion ca. 71 %.

Den samlede drivhusgasemission i 1990 inklusiv LULUCF og indirekte CO₂ er beregnet til 78,5 millioner tons CO₂-ækvivalenter og emissionen i 2030 er fremskrevet til 25,5 million tons CO₂-ækvivalenter. Dette svarer til en reduktion på 67,5 % mellem 1990 og 2030. Effekten af CO₂ fangst og lagring (carbon capture and storage - CCS) er ikke muligt at tildele til enkelte sektorer og er derfor ikke medtaget i dette tal.



Figur R.1 Totale drivhusgasemissioner i CO₂-ækvivalenter fordelt på hovedsektorer for 2024 og tidsserier fra 1990 til 2050.

Stationær forbrænding

Stationær forbrænding omfatter Energiindustri (konvertering og olie/gas produktion), Fremstillingsvirksomhed og Andre sektorer. Andre sektorer dækker over handel/service, husholdninger samt landbrug/gartneri. Drivhusgasemissionen fra kraft- og kraftvarmeværker, som er den største kilde i 2023 (43 %), er estimeret til at falde i perioden 2024 til 2050 (64 %) som følge af et markant fald i forbruget af fossile brændstoffer i elproduktionen i den sidste del af fremskrivningsperioden. Emissioner fra husholdningers forbrændingsanlæg falder ifølge fremskrivningen i perioden 2024 til 2050 med hele 91 % pga. lavere forbrug af de fossile brændstoffer. Emissioner fra fremstillingsindustrien falder tilsvarende med 80 % i samme periode pga. et fald i anvendelsen af fossile brændstoffer.

Flygtige emissioner

Emissionen af drivhusgasser fra sektoren udviser store fluktuationer i de historiske år 1990-2024, bl.a. som følge af varierende omfang af efterforsknings- og vurderingsboringer (E/V-boringer). Emissioner fra E/V-boringer indgår ikke i fremskrivningen, da der ikke foreligger fremskrevne aktivitetsdata. Emissionerne fra de øvrige flygtige kilder forventes at falde med 82 % i perioden 2024-2050. Emissionen fra flaring stiger i den første del af fremskrivningsperioden pga. opstart af produktion på Tyrafeltet efter renoveringen, men falder igen. Emissioner fra udvinding af olie og naturgas forventes at falde gennem fremskrivningsperioden pga. forventet mindre udvinding. Emissionerne af drivhusgasser fra de øvrige kilder forventes at være konstante eller næsten konstante i fremskrivningsperioden.

Industriprocesser og anvendelse af produkter

Emissionen af drivhusgasser fra industrielle processer og anvendelse af produkter (IPPU) er steget op gennem halvfemserne med maksimum i 2000. Op-hør af produktion af salpetersyre/kunstgødning i 2004 har resulteret i en betydelig reduktion af drivhusgasemissionen. De væsentligste kilder i 2024 er mineralsk industri (især cementproduktion), som bidrager med 69 % af drivhusgasemissionen, samt anvendelse af erstatningsgasser (F-gasser) for ozonnedbrydende stoffer (ODS), der bidrager med 20 %. De tilsvarende andele i 2050 forventes at ligge på hhv. 86 % og 0 %. Forbrug af kalk og medfølgende emission af CO₂ fra røggasrensning antages at følge forbruget af kul og affald i kraftvarmeanlæg. Drivhusgasemissionen fra IPPU-sektoren forventes også i fremtiden at være meget afhængig af cementproduktionen på Danmarks eneste cementfabrik.

Transport og andre mobile kilder

Vejtransport er den største emissionskilde for drivhusgasser fra sektoren transport og andre mobile kilder i 2024 (79 %), og emissionerne fra denne kilde forventes at falde i fremskrivningsperioden 2024 til 2050 med det største fald i perioden efter 2030. Den samlede emission for andre mobile kilder (indenrigsluftfart, jernbane, indenrigssøfart, ikke-vejgående industrimaskiner, maskiner i have/hushold, landbrugsmaskiner, fiskeri) er lave sammenlignet med vejtransport. Ikke-vejgående maskiner inden for landbrug, skovbrug og fiskeri bidrager med 8 % af sektorens drivhusgasser i 2024.

Landbrug

De største kilder i 2024 er emissioner fra landbrugsjorder (33 %), dyrenes fordøjelse (34 %) og gødningshåndtering (31 %). De tilsvarende andele i 2050 forventes at være hhv. 36 %, 37 % og 25 %. Fra 1990 til 2024 er emissionen fra landbrugssektoren faldet med 22 %. Fra 2024 til 2050 forventes emissionerne at falde med ca. 36 %. Årsagen til faldet i de historiske år (1990-2024) er en forbedring i udnyttelsen af kvælstof i husdyrgødningen, og hermed et markant fald i anvendelsen af handelsgødning samt lavere emission fra kvælstofudvaskning. I fremskrivningen er der taget højde for teknologiske tiltag i stald og lager samt emissionsreducerende fodertilg.

Affald

Affaldssektorens samlede drivhusgasemissioner er faldet med 38 % i perioden 1990 til 2024. Fra 2024 til 2050 er emissionerne fremskrevet til at stige med 16 %, hvilket kan tilskrives en markant stigning i emissionen fra biogasbehandling. Historisk set har drivhusgasemissionen fra lossepladser været den største kilde fra affaldssektoren, men emissionerne fra kilden er faldende og vil falde med yderligere 28 % fra 2024-2050. I 2024 er biogas produktion den største affaldskilde til drivhusgasemissioner (41 %), og dette billede vil fortsætte frem mod 2050 (52 %). Emissioner fra spildevand, kompostering og øvrige (brande) forventes at være ret konstante i fremskrivningsperioden. Drivhusgasemissioner fra disse tre kilder i 2025-2050 bidrager med henholdsvis 17-18 %, 10-12 % og 9-10 %.

LULUCF

LULUCF (Land Use, Land Use Change and Forestry)-sektoren inkluderer emissioner fra og optag ved arealanvendelse og ændringer i arealanvendelsen for arealanvendelseskategorierne skove (skovrejsning, afskovning, skovdyrking), dyrkede landbrugsarealer, permanente græsarealer, vådområder og søer, bebyggede arealer (by og infrastruktur) og øvrigt land. Emissioner og optag fra de to mindre kilder høstede træprodukter (HWP) og naturbrande er også en del af LULUCF. Arbejdet til denne fremskrivning dækker de dyrkede landbrugsarealer, permanente græsarealer, vådområder og søer, bebyggede arealer og øvrigt land. Fremskrivningen af emissioner og optag fra skov og høstede træprodukter udarbejdes af Institut for Geovidenskab og Naturforvaltning (IGN) ved Københavns Universitet, og er opgjort særskilt. Resultaterne herfra er opdateret for årene 2024-2050 på baggrund af nye data fra IGN. Overordnet set er LULUCF-sektoren historisk en kilde til CO₂-udledning i Danmark, men samlet har der i de senere år været et netto optag. Skovbrug og høstede træprodukter giver et netto optag af CO₂ og opvejer derved delvist eller helt de øvrige udledninger, hvilket giver en lavere samlet udledning for hele LULUCF-sektoren eller i nogle år et samlet netto optag. De samlede emissioner fra LULUCF-sektoren var 6440 kt CO₂-ækvivalenter i 1990 og reduceret til et optag på 116 kt CO₂-ækvivalenter i 2024. I 2030 anslås en lille nettokilde på 727 kt CO₂-ækvivalenter. Fra 2030 og frem til 2050 skønnes et samlet stort nettooptag på op til 3400 kt CO₂-ækvivalenter på grund af mindre areal med drænet organisk jord, der udleder CO₂ og en yderligere stigning i mængden af kulstof lagret i de danske skove.

1 Introduction

In the Danish Environmental Protection Agency's project "Projection models 2010" a range of sector-related partial models were developed to enable projection of the emissions of sulphur dioxide (SO₂), nitrogen oxides (NO_x), non-methane volatile organic compounds (NMVOC) and ammonia (NH₃) forward to 2010 (Illerup et al., 2002). Subsequently, the project "Projection of GHG emissions 2005 to 2030" was carried out to extend the projection models to include the GHGs CO₂, CH₄, N₂O as well as HFCs, PFCs and SF₆, and project the emissions for these gases to 2030 (Illerup et al., 2007). This was further updated in later projects (Nielsen et al., 2008, 2010, 2011, 2013, 2014, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024 and 2025). The purpose of the present project, "Projection of greenhouse gas emissions 2025 to 2050" has been to update the emission projections for all sectors based on the latest national energy projections, other relevant activity data and emission factors and extend the projection period to 2050.

1.1 Obligations

The European Union (EU) has committed itself to reduce emissions of GHGs by 55 % in 2030 compared to the level in the so-called base year 1990; in Denmark's case 1990 for CO₂, CH₄, and N₂O and 1995 for industrial GHGs (HFCs, PFCs and SF₆). Within the EU, Denmark has an obligation according to the EU Effort Sharing Regulation to reduce emissions in the non-ETS (sectors not included in the EU Emission Trading Scheme) sector by 50 % in 2030 compared to 2005. A part of that obligation can be fulfilled by making use of so-called LULUCF-credits under the EU LULUCF-regulation as well as emission allowances from the EU Emission Trading Scheme.

Since 1990, Denmark has implemented policies and measures aiming at reducing Denmark's emissions of CO₂ and other GHGs. Furthermore, in June 2020 the Danish parliament adopted in the national Climate Change Act a target of reducing national emissions of greenhouse gases (including LULUCF) by 70 % in 2030 as compared to emissions in 1990.

In this report, the estimated effects of policies and measures implemented or decided as of December 2025 are included in the projections and the projection of total GHG emissions is therefore a so-called 'with existing measures' projection.

1.2 Greenhouse gases

The GHGs reported under the Climate Convention and projected in this report are:

- Carbon dioxide CO₂
- Methane CH₄
- Nitrous oxide N₂O
- Hydrofluorocarbons HFCs
- Perfluorocarbons PFCs
- Sulphur hexafluoride SF₆

Nitrogen trifluoride (NF₃) is also part of the reporting requirements, but this gas has never been used in Denmark and is not considered relevant for the projections.

The main greenhouse gas responsible for the anthropogenic influence on the heat balance is CO₂. The atmospheric concentration of CO₂ has increased from a pre-industrial value of about 278 ppm to about 410 ppm in 2019 (an increase of about 47 %) (IPCC, 2021) and exceeds the natural range of 180-300 ppm over the last 650 000 years as determined by ice cores. The main cause for the increase in CO₂ is the use of fossil fuels, but changing land use, including forest clearance, has also been a significant factor. The greenhouse gases CH₄ and N₂O are very much linked to agricultural production; CH₄ has increased from a pre-industrial atmospheric concentration of about 729 ppb to 1866 ppb in 2019 (an increase of about 156 %) and N₂O has increased from a pre-industrial atmospheric concentration of about 270 ppb to 332 ppb in 2019 (an increase of about 23 %) (IPCC, 2021). Changes in the concentrations of greenhouse gases are not related in simple terms to the effect on the heat balance, however. The various gases absorb radiation at different wavelengths and with different efficiency. This must be considered in assessing the effects of changes in the concentrations of various gases. Furthermore, the lifetime of the gases in the atmosphere needs to be taken into account – the longer they remain in the atmosphere, the greater the overall effect. The global warming potential (GWP) for various gases has been defined as the warming effect over a given time of a given weight of a specific substance relative to the same weight of CO₂. The purpose of this measure is to be able to compare and integrate the effects of individual substances on the global climate. Typical lifetimes in the atmosphere of substances are very different, e.g. 12 and 109 years approximately for CH₄ and N₂O, respectively (Myhre et al., 2013). Therefore, the time perspective clearly plays a decisive role. The timeframe chosen is typically 100 years. The effect of the various greenhouse gases can then be converted into the equivalent quantity of CO₂, i.e. the quantity of CO₂ giving the same effect in absorbing solar radiation. According to the IPCC and their Fifth Assessment Report (Myhre et al., 2013), which UNFCCC (UNFCCC, 2018) has decided to use as reference for reporting under the Paris Agreement, the global warming potentials for a 100-year time horizon are

- CO₂ 1
- CH₄ 28
- N₂O 265

Based on weight and a 100-year period, CH₄ is thus 28 times more powerful a GHG than CO₂, and N₂O is 265 times more powerful. Some of the other GHGs (hydrofluorocarbons, perfluorocarbons and sulphur hexafluoride) have considerably higher global warming potential values. For example, sulphur hexafluoride has a global warming potential of 23 500 (Myhre et al., 2013).

Denmark includes reporting of indirect CO₂ in the emission inventory and projection. Indirect CO₂ is the atmospheric oxidation of CO, NMVOC and CH₄. For more information, please see Nielsen et al. (2025).

1.3 Historical emission data

The greenhouse gas emissions are estimated according to the IPCC guidelines and are aggregated into five main sectors. The greenhouse gases include CO₂, CH₄, N₂O, HFCs, PFCs, SF₆ and NF₃. Figure 1.1 shows the estimated total

greenhouse gas emissions in CO₂ equivalents from 1990 to 2024. The emissions are not corrected for electricity trade or temperature variations.

CO₂ is the most important greenhouse gas contributing in 2024 to the national total in CO₂ equivalents including LULUCF (Land Use and Land Use Change and Forestry) and including indirect CO₂ emissions with 62.6%, followed by CH₄ with 23.3 %, N₂O with 13.4 %, and f-gases (HFCs, PFCs, SF₆ and NF₃) with 0.8 %.

The energy sector and agricultural sector represent the largest sources, followed by industrial processes and product use and waste, see Figure 1.1. The LULUCF sector was a net sink in 2024. The total national greenhouse gas emission in CO₂ equivalents excluding LULUCF has decreased by 49.0 % from 1990 to 2024 when considering indirect CO₂, if excluding indirect CO₂ the emissions have decreased by 48.5 %. The emissions including LULUCF and indirect CO₂ have decreased by 53.3 % from 1990 to 2024.

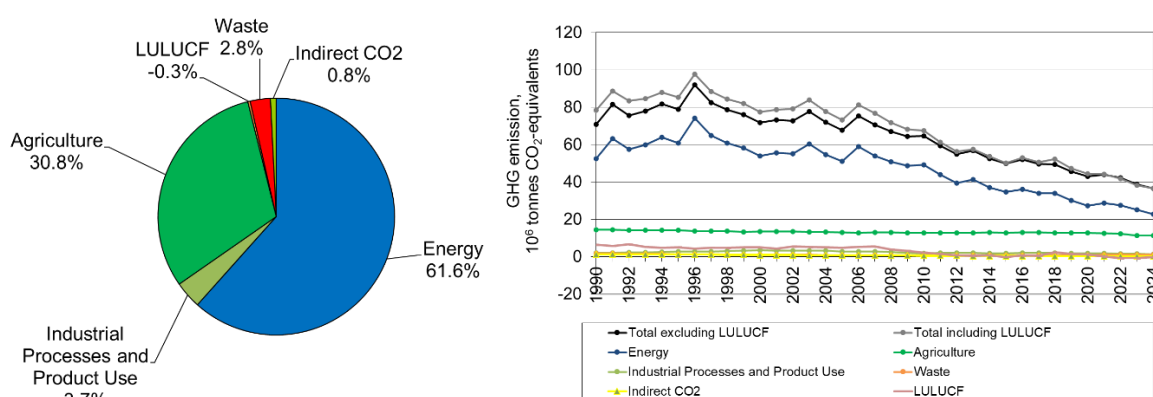


Figure 1.1 Greenhouse gas emissions in CO₂ equivalents distributed on main sectors for 2024 (excluding LULUCF and indirect CO₂) and time series for 1990 to 2024.

1.3.1 Carbon dioxide

The largest source to the emission of CO₂ is the energy sector, which includes combustion of fossil fuels like oil, coal and natural gas (Figure 1.2). The transport sector (dominated by road transport) is the largest sector in 2024 and contributes with 46 %, followed by energy industries with 26 %. The CO₂ emission decreased by 7.2 % from 2023 to 2024. The main reason for the decrease in emissions is decreased use of fossil fuels particularly in energy industries. In general, CO₂ emissions fluctuate significantly as a result of the electricity trade with neighbouring countries.

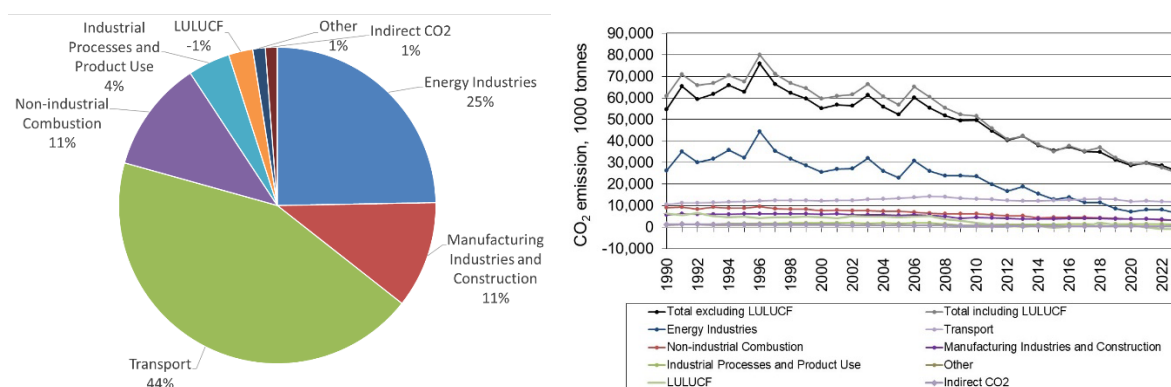


Figure 1.2 CO₂ emissions. Distribution according to the main sectors for 2024 and time series for 1990 to 2024.

1.3.2 Methane

The largest sources of anthropogenic CH₄ emissions are agricultural activities contributing with 81.4 % in 2024, waste (9.8 %) and the remaining emission sources cover 8.8 % - see Figure 1.3. The emission from agriculture derives from enteric fermentation (45.4 %) and management of animal manure (36.0 %).

Since 1990, the emission of CH₄ from enteric fermentation has decreased 10.7 % mainly due to the decrease in the number of cattle. However, this reduction is countered by an increase of 3.6 % in emissions from manure management caused by a change in housing type towards slurry-based systems. In later years, the emission from manure management has decreased due to changes in manure management, e.g. more biogas treatment and acidification of slurry. The emission of CH₄ from solid waste disposal has decreased significantly (83.4 %) from 1990 to 2024 due to an increase in the incineration of waste and extensive recycling thereby causing a decrease in the waste disposal on land. The CH₄ emission from the energy sector increases from mid-1990's from public power and district heating plants increases due to the increasing use of gas engines in the decentralised cogeneration plant sector. Due to the liberalisation of the electricity market the use of gas engines declined from 2005 onwards. The high emission from gas engines is caused by the fact that up to 3 % of the natural gas in the gas engines is not combusted.

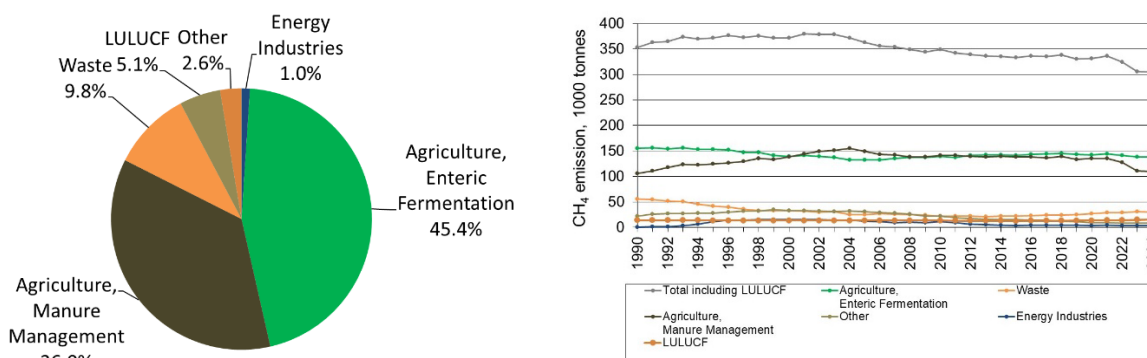


Figure 1.3 CH₄ emissions. Distribution according to the main sectors for 2024 and time series for 1990 to 2024.

1.3.3 Nitrous oxide

Agriculture is the most important N₂O emission source in 2024 contributing with 86.2 % (Figure 1.4) of which N₂O from soils dominates (75.9 % of total N₂O). Substantial emissions come from drainage water and coastal waters where nitrogen is converted to N₂O through bacterial processes. However, the nitrogen converted in these processes originates mainly from the agricultural use of manure and fertilisers.

The main reason for the decrease of N₂O emission is due to the agricultural sector, which has decreased with 35.9 % since 1990 caused by legislation to improve the utilisation of nitrogen in manure. Combustion of fuels contributes 8.4 % to the total whereof the N₂O emission from transport contributes with 6.1 % to the national total in 2024. Emission from industrial processes decreased significantly in 2004 due to the closure of the only nitric acid plant operating in Denmark and the emission from this emission source is therefore close to zero since then.

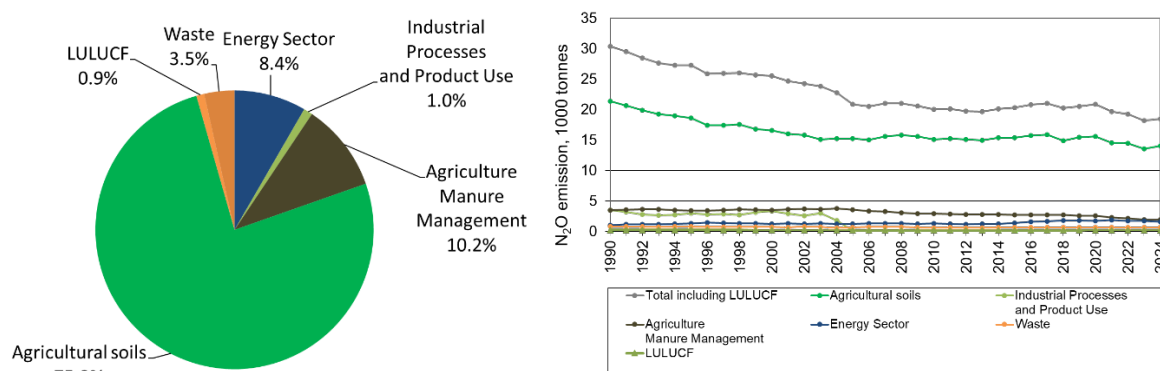


Figure 1.4 N₂O emissions. Distribution according to the main sectors for 2024 and time series for 1990 to 2024.

1.3.4 HFCs, PFCs, SF₆ and NF₃

This part of the Danish inventory only comprises a full data set for all substances from 1995 - see Figure 1.5. From 1995 to 2000, there was a continuous and substantial increase in the contribution from the range of f-gases as a whole (133.6 %) calculated as the sum of emissions in CO₂ equivalents. In 2000-2009, the increase of f-gas emissions continues with a lower increasing rate than for the years 1995 to 2000. Hereafter, the f-gas emission decreases.

The use of HFCs has increased several folds and HFCs have become the dominant f-gases, comprising 68.6 % in 1995 but 95.6 % in 2024. HFCs are mainly used as a refrigerant. SF₆ contributed considerably to the f-gas sum in earlier years, with 31.2 % in 1995 and reduced to 4.4 % in 2024. Due to environmental awareness the Danish legislation regulates the use of f-gases, e.g. since 1 January 2007, new HFC-based refrigerant stationary systems are forbidden. Refill of old systems are still allowed and the use of air conditioning in mobile systems increases.

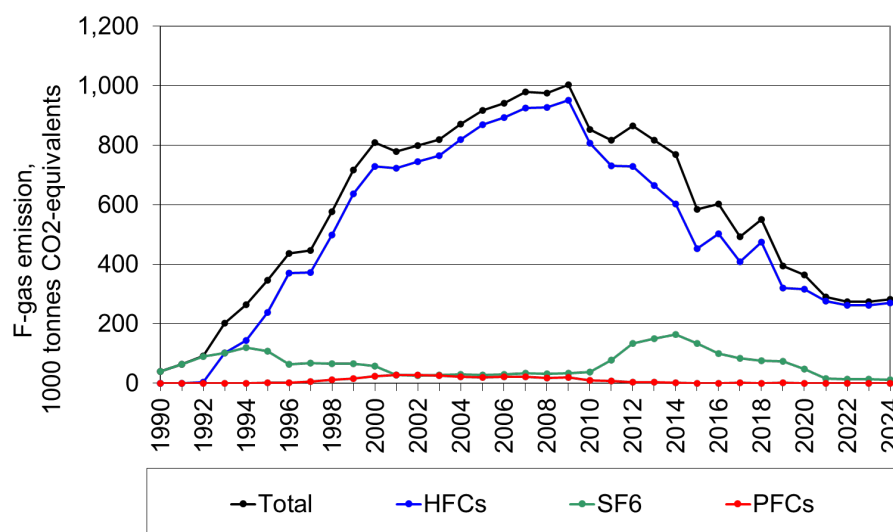


Figure 1.5 F-gas emissions. Time series for 1990 to 2024.

1.4 Projection models

Projection of emissions can be considered as emission inventories for the future in which the historical data is replaced by a number of assumptions and simplifications. In the present project, the emission factor method is used and the emission as a function of time for a given pollutant can be expressed as:

$$(1.1) \quad E = \sum_s A_s(t) \cdot EF_s(t)$$

where A_s is the activity for sector s for the year t and $EF_s(t)$ is the aggregated emission factor for sector s .

Error! Bookmark not defined. In order to model the emission development as a consequence of changes in technology and legislation, the activity rates and emission factors of the emission source should be aggregated at an appropriate level, at which relevant parameters such as process type, reduction targets and installation type can be taken into account. If detailed knowledge and information of the technologies and processes are available, the aggregated emission factor for a given pollutant and sector can be estimated from the weighted emission factors for relevant technologies as given in equation 1.2.

$$(1.2) \quad EF_s(t) = \sum_k P_{s,k}(t) \times EF_{s,k}(t)$$

where P is the activity share of a given technology within a given sector, $EF_{s,k}$ is the emission factor for a given technology and k is the type of technology.

Official Danish projections of activity rates are used in the models for those sectors for which the projections are available. For other sectors, projected activity rates are estimated in co-operation with relevant research institutes and other organisations. The emission factors are based on recommendations from the IPCC Guidelines (IPCC, 2006) and the EMEP/EEA Guidebook (EMEP/EEA, 2023) as well as data from measurements made in Danish plants etc. The influence of changes in legislation and statutory orders on the development of the emission factors has been estimated and included in the models.

The projection models are based on the same structure and method as the Danish emission inventories to ensure consistency. In Denmark the emissions are estimated according to the EMEP/EEA Guidebook (EMEP/EEA, 2023) and the SNAP (Selected Nomenclature for Air Pollution) sector categorisation and nomenclature are used. The detailed level makes it possible to aggregate to both the UNECE/EMEP nomenclature (NFR) and the IPCC nomenclature (CRF).

1.5 References

EMEP/EEA, 2023: EMEP/EEA air pollutant emission inventory guidebook 2023. Technical report No 06/2023. Available at:
<https://www.eea.europa.eu/publications/emep-eea-guidebook-2023>

Illerup, J.B., Birr-Pedersen, K., Mikkelsen, M.H., Winther, M., Gyldenkerne, S., Bruun, H.G. & Fenhann, J. 2002: Projection Models 2010. Danish Emissions of SO₂, NO_x, NMVOC and NH₃. National Environmental Research Institute. - NERI Technical Report 414: 192 pp. Available at:
http://www2.dmu.dk/1_viden/2_Publikationer/3_fagrappporter/rappor-ter/FR414.pdf

Illerup, J.B., Nielsen, O.K., Winther, M., Mikkelsen, M.H., Lyck, E., Nielsen, M., Hoffmann, L., Gyldenkerne, S. & Thomsen, M. 2007: Projection of Green-

house Gas Emissions. 2005 to 2030. National Environmental Research Institute, University of Aarhus. - NERI Technical Report 611: 116 pp. Available at: <http://www.dmu.dk/Pub/FR611.pdf>

IPCC 2006, 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Prepared by the National Greenhouse Gas Inventories Programme, Eggleston H.S., Buendia L., Miwa K., Ngara T. and Tanabe K. (eds). Published: IGES, Japan. Available at: <http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html>

IPCC, 2021: Summary for Policymakers. In: Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change [MassonDelmotte, V., P. Zhai, A. Pirani, S.L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M.I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J.B.R. Matthews, T. K. Maycock, T. Waterfield, O. Yelekçi, R. Yu and B. Zhou (eds.)]. Cambridge University Press. In Press.

Myhre, G., D. Shindell, F.-M. Bréon, W. Collins, J. Fuglestad, J. Huang, D. Koch, J.-F. Lamarque, D. Lee, B. Mendoza, T. Nakajima, A. Robock, G. Stephens, T. Takemura & H. Zhang, 2013: Anthropogenic and Natural Radiative Forcing. In: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.

Nielsen, O-K., Winther, M., Mikkelsen, M.H., Gyldenkerne, S., Lyck, E., Plejdrup, M., Hoffmann, L., Thomsen, M., Fauser, P., 2008: Projection of Greenhouse Gas Emissions 2007 to 2025 National Environmental Research Institute, Denmark. 211 pp. - NERI Technical Report no. 703. Available at: <https://www.dmu.dk/Pub/FR703.pdf>

Nielsen, O-K., Winther, M., Mikkelsen, M.H., Gyldenkerne, S., Lyck, E., Plejdrup, M., Hoffmann, L., Thomsen, M., Hjelgaard, K. & Fauser, P., 2010: Projection of Greenhouse Gas Emissions 2009 to 2030 National Environmental Research Institute, Aarhus University, Denmark. 143 pp. - NERI Technical Report no. 793. Available at: <https://www2.dmu.dk/pub/fr793.pdf>

Nielsen, O-K., Winther, M., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S., Plejdrup, M., Hoffmann, L., Thomsen, M., Hjelgaard, K. & Fauser, P., 2011: Projection of Greenhouse Gas Emissions 2010 to 2030. National Environmental Research Institute, Aarhus University, Denmark. 178 pp. - NERI Technical Report no. 841. Available at: <https://www2.dmu.dk/pub/fr841.pdf>

Nielsen, O-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Hoffmann, L., Fauser, P., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2013. Projection of greenhouse gases 2011-2035. Aarhus University, DCE - Danish Centre for Environment and Energy, 179 pp. Scientific Report from DCE - Danish Centre for Environment and Energy No. 48. Available at: <http://www.dmu.dk/Pub/SR48.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Fauser, P., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2014. Projection of greenhouse gases 2013-2035. Aarhus University, DCE – Danish Centre for Environment and Energy, 137 pp. Scientific Report from DCE – Danish Centre for Environment and Energy No. 129. Available at: <http://dce2.au.dk/pub/SR129.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Fauser, P., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2016. Projection of greenhouse gases 2014-2025. Aarhus University, DCE – Danish Centre for Environment and Energy, 127 pp. Scientific Report from DCE – Danish Centre for Environment and Energy No. 194. Available at: <http://dce2.au.dk/pub/SR194.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2017. Projection of greenhouse gases 2016-2035. Aarhus University, DCE – Danish Centre for Environment and Energy, 126 pp. Scientific Report from DCE – Danish Centre for Environment and Energy No. 244. Available at: <http://dce2.au.dk/pub/SR244.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2018. Projection of greenhouse gases 2017-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 127 pp. Scientific Report No. 294. Available at: <http://dce2.au.dk/pub/SR294.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2019. Projection of greenhouse gases 2018-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 125 pp. Scientific Report No. 345. Available at: <http://dce2.au.dk/pub/SR345.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2020. Projection of greenhouse gases 2019-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 131 pp. Scientific Report No. Available at: <https://dce2.au.dk/pub/SR408.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Gyldenkerne, S. & Thomsen, M. 2021. Projection of greenhouse gases 2020-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 132 pp. Scientific Report No. Available at: <https://dce2.au.dk/pub/SR454.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R. & Gyldenkerne, S., 2022. Projection of greenhouse gases 2021-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 131 pp, Scientific Report No. Available at: <https://dce2.au.dk/pub/SR505.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Andersen, T.A. & Gyldenkerne, S., 2023. Projection of greenhouse gases 2022-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 145 pp. Scientific Report No. 572. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_500-599/SR572.pdf

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Andersen, T.A., Callisen, L.W., Gyldenkerne, S., & Levin, G. 2024. Projection of greenhouse gases 2023-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 148 pp. Scientific Report No. 610. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_600-699/SR610.pdf

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Hjelgaard, K., Nielsen, M., Mikkelsen, M.H., Albrektsen, R., Andersen, T.A., Gyldenkerne, S., & Levin, G. 2025. Projection of greenhouse gases 2024-2050. Aarhus University, DCE – Danish Centre for Environment and Energy, 144 pp. Scientific Report No. 666. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_600-699/SR666.pdf

2 Stationary combustion

2.1 Methodology

Stationary combustion plants are included in the CRF emission sources *1A1 Energy Industries*, *1A2 Manufacturing Industries* and *1A4 Other sectors*.

The methodology for emission projections is, just as the Danish emission inventory for stationary combustion plants, based on the CORINAIR system described in the EMEP/EEA Guidebook (EMEP/EEA, 2023). The emission projections are based on the official activity rates projection from the Danish Energy Agency and on emission factors for different fuels, plants and sectors. For each of the fuels and categories (sector and e.g. type of plant), a set of general emission factors has been determined. Some emission factors refer to the IPCC Guidelines (IPCC, 2006) and some are country-specific and refer to Danish legislation, EU ETS (Emission Trading System) reports from Danish plants, Danish research reports or calculations based on emission data from a considerable number of plants.

The fuel consumption used in the emission projection does not follow the exact same sector split as the official energy statistics elaborated by the DEA. The reason for this is that for some mobile sources, the fuel consumption is calculated bottom-up and that this bottom-up calculation does not match the data in the energy projection. Therefore, fuel amounts can be transferred between stationary and mobile sectors. One example is gasoline used in the commercial and institutional sector, where the energy projection does not include any consumption; hence, the gasoline is taken from road transport to cover the bottom-up calculated consumption. For the emission projections, fuel consumption has not been transferred between sectors, so the methodology deviates from the historic inventory. It is important to stress that the overall fuel consumption as reported in the official energy statistics is followed by DCE, only the sectoral allocation is impacted.

Some of the large plants, such as e.g. power plants and municipal waste incineration plants are registered individually as large point sources and emission data from the actual plants are used. The CO₂ from incineration of the fossil part of municipal waste is included in the projected emissions.

2.2 Sources

The combustion of fossil fuels is one of the most important sources of greenhouse gas emissions. This chapter covers all sectors using fuels for energy production, except for the transport sector and mobile combustion in e.g. manufacturing industries, households and agriculture. Table 2.1 shows the sector categories used and the relevant classification numbers according to SNAP and IPCC.

Table 2.1 Sectors included in stationary combustion.

Sector	IPCC	SNAP
Public power	1A1a	0101
District heating plants	1A1a	0102
Petroleum refining plants	1A1b	0103
Oil/gas extraction	1A1c	0105
Commercial and institutional plants	1A4a	0201
Residential plants	1A4b	0202
Plants in agriculture, forestry and aquaculture	1A4c	0203
Combustion in industrial plants	1A2	03

In Denmark, all municipal waste incineration is utilised for heat and power production. Thus, incineration of waste is included as stationary combustion in the IPCC Energy sector (source categories *1A1*, *1A2* and *1A4a*).

Fugitive emissions from fuels connected with extraction, transport, storage and refining of oil and gas are described in Chapter 3. Emissions from flaring in oil refineries and in oil and gas extraction are also included in Chapter 3 on fugitive emissions.

Stationary combustion is the largest sector contributing with roughly 30 % of the total greenhouse gas emission. As seen in Figure 1.1 in Section 1.3, the sub-sector contributing most to the greenhouse gas emission is Energy Industries.

2.3 Fuel consumption

Energy consumption in the model is based on the Danish Energy Agency's energy consumption projections to 2050 (Danish Energy Agency, 2026).

The emission projections are based on the amount of fuel, which is expected to be combusted in Danish plants and is not corrected for international trade with electricity, since this correction is not allowed for reporting to the EU and UNFCCC. Fuel use by fuel type is shown in Figure 2.1.

The largest fuel consumption throughout the time series can be observed for wood. The consumption of coal almost disappears and also the consumption of natural gas decreases significantly. Overall, the fuel consumption decreases significantly as a result of more renewable energy sources, e.g. wind and solar power.

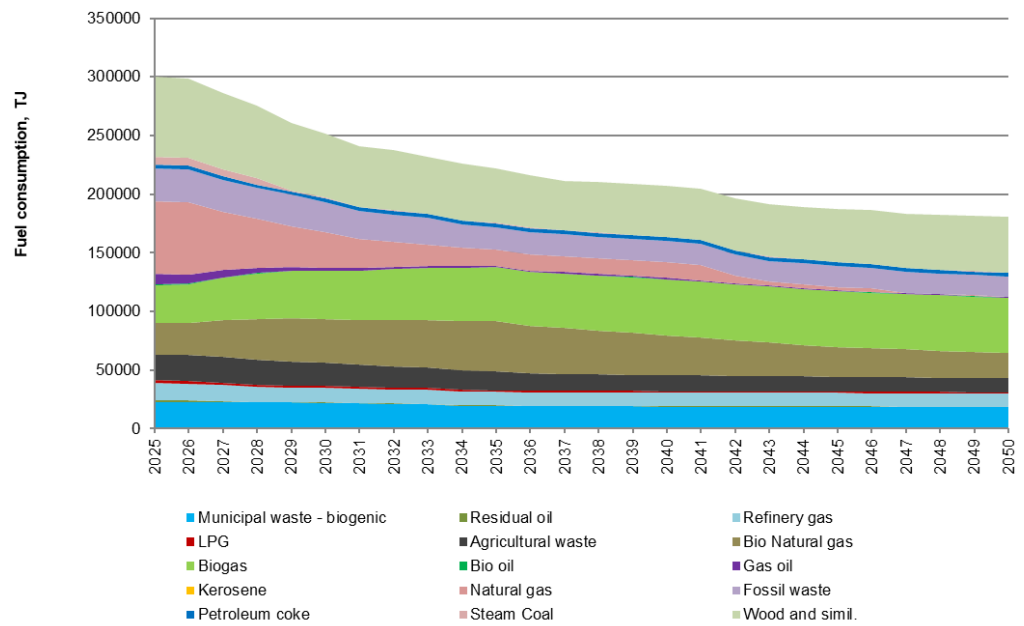


Figure 2.1 Projected energy consumption by fuel type.

Fuel use by sector is shown in Figure 2.2. The sectors consuming the most fuel are public power (including CHP), residential, manufacturing industries, district heating and offshore oil/gas extraction.

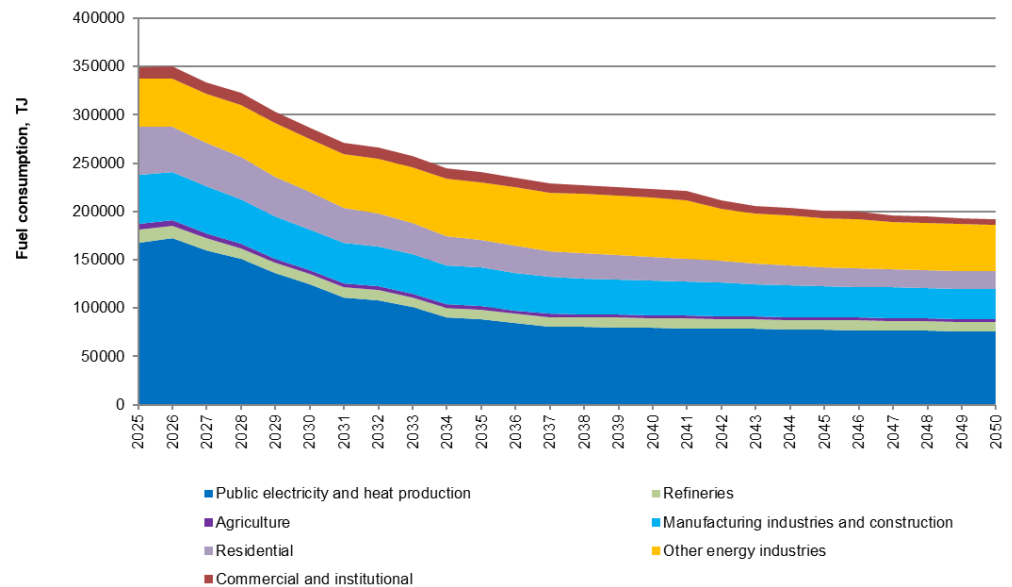


Figure 2.2 Energy use by sector.

2.4 Emission factors

In general, emission factors for area sources refer to the emission factors for 2024 applied in the 2026 emission inventory (Nielsen et al., 2026).

The emission factor for CO₂ is only fuel-dependent whereas the N₂O and CH₄ emission factors depend on the sector (SNAP) in which the fuel is used.

The CO₂ emission factors for coal, residual oil, refinery gas and offshore combustion of natural gas (offshore gas turbines) are all based on EU ETS data and updated annually in the historic emission inventories. In the projection, the average 2019-2024 emission factors have been applied rather than including only the 2024 data.

The offshore gas field in the North Sea, Tyra, was shut down for redevelopment in September 2019. Part load operation started in spring 2024, full load operation in spring 2025. During this period, consumers in Denmark primarily got their gas supply from Germany (Energinet, 2021). The CO₂ emission factor applied for natural gas¹ in 2024 is based on gas quality data from Energinet for 2024 (Energinet, 2025). The CO₂ emission factor applied for 2025-2050 is the average value for the years 2023-2024².

Residential wood combustion is a large emission source for CH₄. The projections are based on total wood consumption in residential plants as reported by the DEA, data for technology distribution and replacement rate and finally technology specific emission factors. The technology specific emission factors are equal to the technology specific emission factors applied for the historic emission inventories. The replacement of old technologies with new technologies results in a decreasing implied emission factor for CH₄.

A time series has been estimated for the CH₄ emission factor for residential/agricultural combustion of straw. The time series is based on new legislation and assumptions concerning replacement rates for the boiler units.

2.5 Emissions

Emissions for the individual GHGs are calculated by means of Equation 2.1, where A_s is the activity (fuel consumption) for sector s for year t and $EF_s(t)$ is the aggregated emission factor for sector s .

$$(2.1) \quad E = \sum_s A_s(t) \cdot EF_s(t)$$

2.5.1 The total emission in CO₂ equivalents for stationary combustion is shown in Table 2.2

Sector	1990	2000	2005	2010	2020	2024	2025	2030	2035	2040	2045	2050
Public electricity and heat production	24804	23592	20625	21666	5498	4142	3196	2151	1475	1475	1476	1477
Petroleum refining plants	909	1003	940	855	912	850	758	629	567	567	567	567
Oil/gas extraction	536	1510	1664	1582	963	1124	1249	923	827	775	173	4
Commercial and institutional plants	1423	933	967	888	466	308	294	259	222	190	166	134
Residential plants	5151	4195	3864	3378	1660	962	969	838	711	612	469	372
Plants in agriculture, forestry and aquaculture	1006	1119	943	634	265	257	225	40	16	13	8	6
Combustion in industrial plants	5193	5485	4932	3877	3138	2001	1967	1032	586	503	468	393
Total	39022	37836	33935	32880	12901	9644	8658	5873	4405	4135	3328	2955

From 1990 to 2050, the total emission decreases by approximately 36 000 kt CO₂ equivalents or 92 % due to fossil fuels (mainly coal and natural gas) being replaced by renewable energy. The emission projections for the three GHGs

¹ Except offshore gas turbines.

² The CO₂ emission factor for 2019-2022 is lower due to a large fraction of Russian gas with a lower CO₂ emission factor (due to high methane content and a lower share of higher hydrocarbons). The applied emission factor (average for 2023-2024) is close to the average emission factor for 2013-2018 and also close to the emission factor for the first months of 2025.

are shown in Figures 2.4-2.9 and in Tables 2.4-2.6, together with the historic emissions for 1990, 2000, 2005, 2010, 2020 and 2024 (Nielsen et al., 2026).

2.5.2 Carbon dioxide

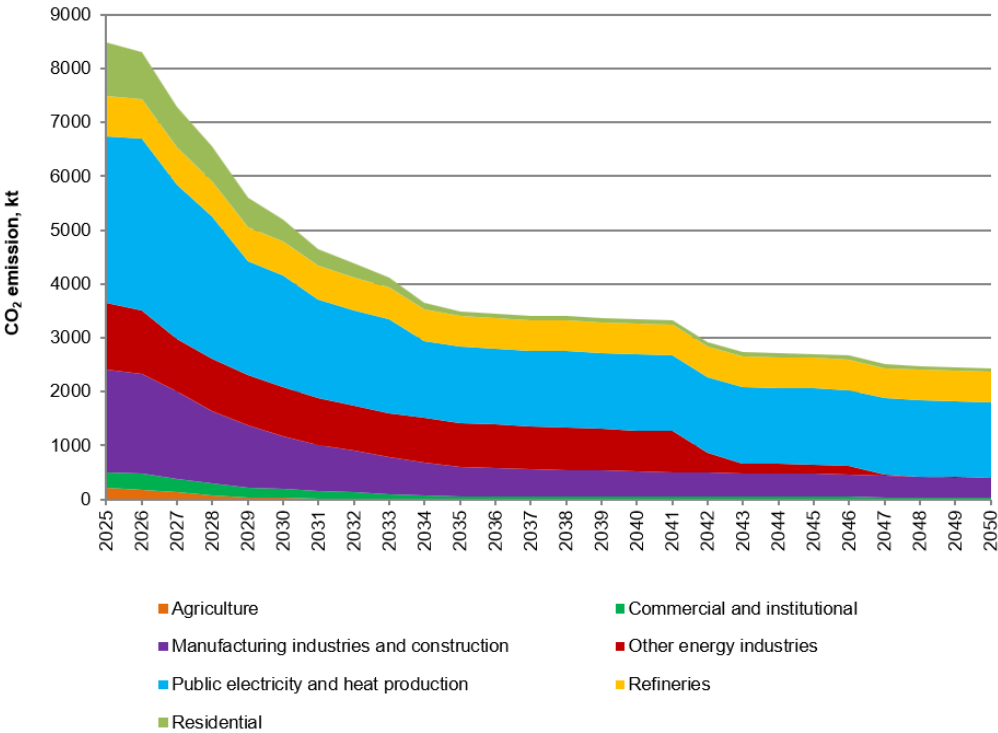


Figure 2.4 CO₂ emissions by sector.

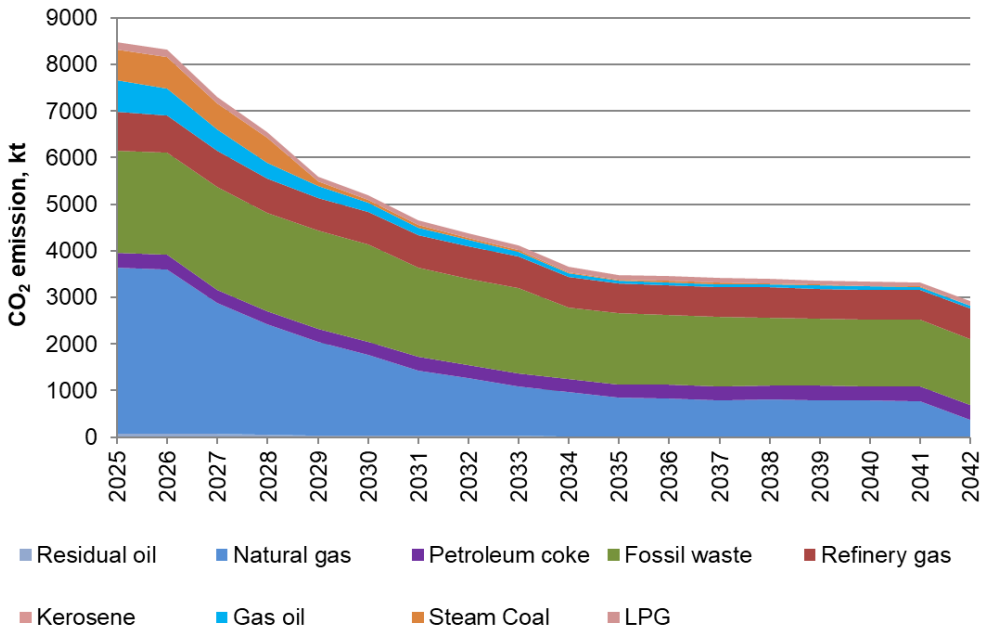


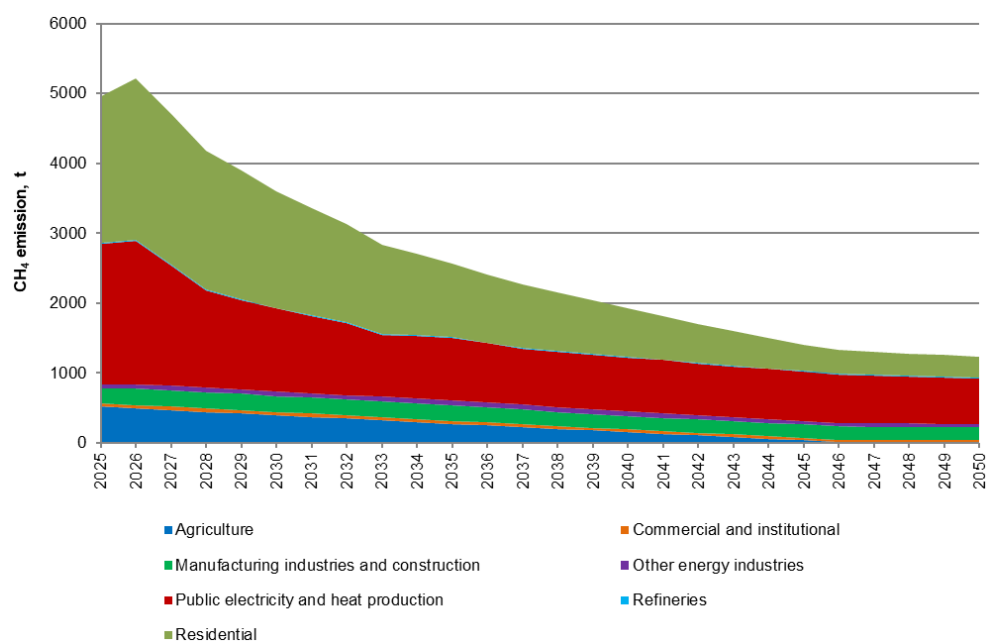
Figure 2.5 CO₂ emissions by fuel.

Table 2.3 CO₂ emissions by sector.

Sector	1990	2000	2005	2010	2020	2024	2025	2030	2035	2040	2045	2050
Public electricity and heat production	24717	23099	20196	21269	5369	4251	3080	2071	1411	1416	1418	1419
Petroleum refining plants	908	1000	938	854	910	879	757	629	567	567	567	567
Oil/gas extraction	530	1494	1653	1574	902	1104	1240	916	820	767	169	1
Commercial and institutional plants	1415	904	940	864	508	276	292	160	54	46	39	35
Residential plants	4971	3992	3626	3125	1526	973	990	405	86	80	66	64
Plants in agriculture, forestry and aquaculture	969	1045	877	591	238	260	207	27	6	6	5	4
Combustion in industrial plants	5136	5398	4861	3816	3042	2221	1921	989	544	461	427	351
Total	38647	36931	33091	32092	12496	9964	8487	5196	3487	3344	2690	2441

CO₂ is the dominant GHG for stationary combustion and comprises in 2024 approximately 97 % of total emissions in CO₂ equivalents. The most important CO₂ source is public electricity and heat production, which contributes with about 43 % in 2024 to the total emissions from stationary combustion plants. Other important sources are combustion plants in industry, residential plants and oil/gas extraction. The emission of CO₂ is projected to decrease by 76 % from 2024 to 2050 due to decreasing fossil fuel consumption.

2.5.3 Methane

Figure 2.6 CH₄ emissions by sector.

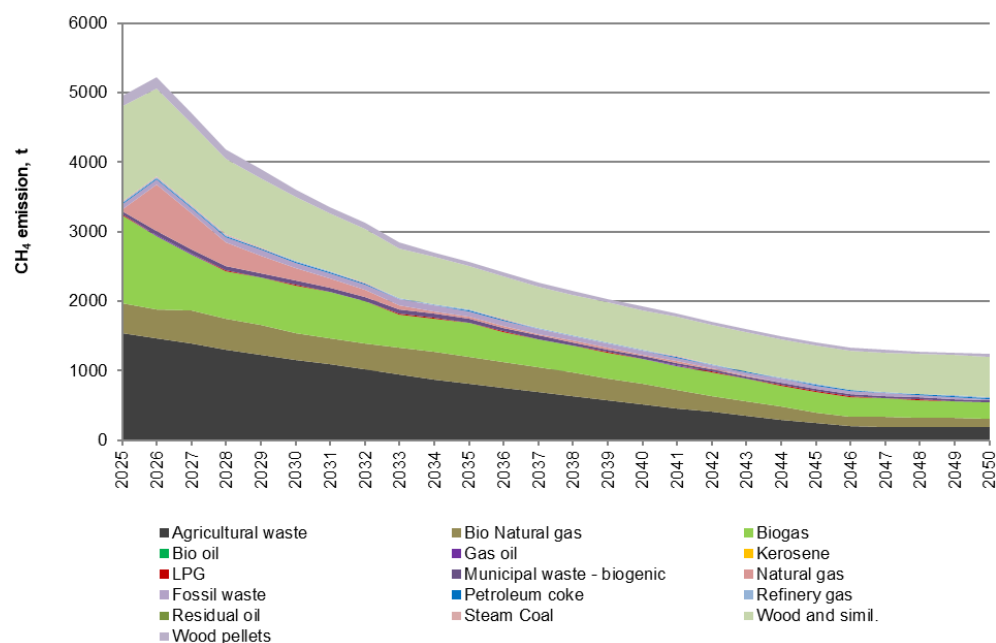


Figure 2.7 CH₄ emissions by fuel.

Table 2.4 CH₄ emissions by sector, t.

Sector	1990	2000	2005	2010	2020	2024	2025	2030	2035	2040	2045	2050
Public electricity and heat production	585	14620	12359	10922	3405	2753	2007	1186	895	768	707	647
Petroleum refining plants	18	21	19	17	18	16	13	11	10	10	10	10
Oil/gas extraction	16	39	48	46	26	33	62	66	70	71	53	48
Commercial and institutional plants	130	900	798	683	335	37	45	47	43	40	37	35
Residential plants	5383	6064	6911	7141	3391	2475	2103	1670	1052	693	370	307
Plants in agriculture, forestry and aquaculture	1089	2465	2186	1375	868	638	518	396	274	154	35	10
Combustion in industrial plants	275	1020	818	546	872	458	215	228	225	186	191	178
Total	7496	25130	23139	20731	8915	6410	4962	3603	2569	1923	1403	1236

The two largest sources of CH₄ emissions are public power and residential plants. This fits well with the fact that natural gas and biogas, especially when combusted in gas engines and wood when used in residential plants are the fuels contributing most to the CH₄ emission. However, in the later part of the projection period, manufacturing industries become the second largest source due to reductions in emissions from the residential sector. There is a significant increase in emissions from 1990 to 2000 due to the increased use of gas engines during the 1990s. Beginning around 2004, the natural gas consumption has begun to show a decreasing trend due to structural changes in the Danish electricity market.

2.5.4 Nitrous oxide

The contribution from the N₂O emission to the total GHG emission is small and the emissions stem from various combustion plants.

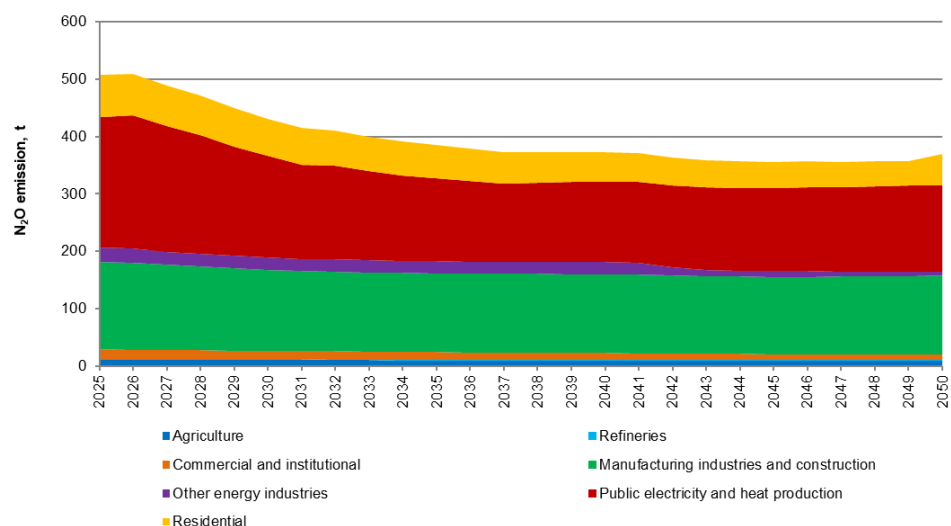


Figure 2.8 N₂O emissions by sector.

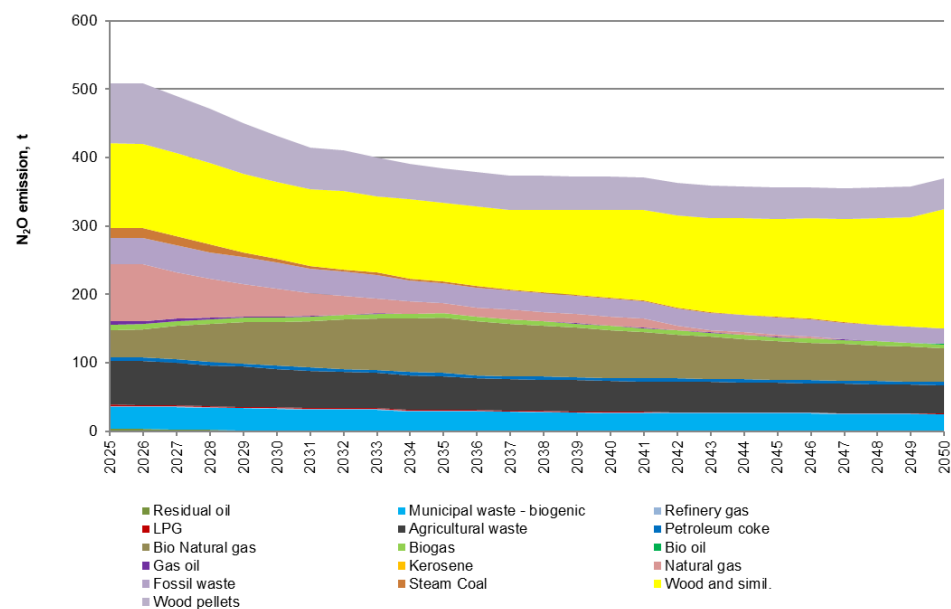


Figure 2.9 N₂O emissions by fuel.

Table 2.5 N₂O emissions by sector, t.

Sector	1990	2000	2005	2010	2020	2024	2025	2030	2035	2040	2045	2050
Public electricity and heat production	265	317	311	345	229	212	228	178	146	140	146	151
Petroleum refining plants	2	7	5	3	4	2	1	1	1	1	1	1
Oil/gas extraction	20	56	40	27	15	19	25	22	21	21	10	7
Commercial and institutional plants	17	15	17	18	17	13	16	15	14	12	11	10
Residential plants	106	118	162	202	160	126	74	64	57	51	45	54
Plants in agriculture, forestry and aquaculture	23	18	18	15	12	11	11	10	9	9	9	9
Combustion in industrial plants	186	221	182	175	162	101	152	140	137	138	134	138
Total	619	752	735	785	599	484	508	431	385	373	356	369

2.6 Recalculations

2.6.1 Recalculations in fuel consumptions

Energy consumption in the model is based on the Danish Energy Agency's energy projections and energy projections for individual plants (Danish Energy Agency, 2026). All recalculations made in these projections are directly observable in the present emission projections.

2.6.2 Recalculations for emission factors

Emission factors have been updated according to the latest emission inventory (Nielsen et al., 2026).

The CO₂ emission factors for coal, residual oil, refinery gas and offshore combustion of natural gas (offshore gas turbines) are all based on EU ETS data and have been updated to the average 2019-2024 emission factors.

The offshore gas field in the North Sea, Tyra, has been shut down from September 2019 to spring 2024. During this period, consumers in Denmark primarily got their gas supply from Germany (Energinet.dk, 2021). The CO₂ emission factor applied for natural gas³ in 2024 has been updated based on gas quality data for 2024 whereas the CO₂ emission factor applied for 2025-2050 has been updated to the average value for the years 2023-2024.

The implied emission factors for CH₄ from residential wood combustion have been updated according to the latest technology specific emission factors (Nielsen et al., 2026) and the updated energy projections. The CH₄ emission factor for residential / agricultural combustion of straw has been updated according to legislation for new plants.

2.7 References

Danish Energy Agency, 2026: Denmark's Energy and Climate Outlook.

EMEP/EEA, 2023: EMEP/EEA air pollutant emission inventory guidebook 2023. Technical report No 06/2023. Available at:
<https://www.eea.europa.eu/publications/emep-eea-guidebook-2023>

Energinet, 2021: Faktablad for gaskvaliteter under Tyra genopbygningen med Baltic Pipe.

Energinet, 2025: e-mail from Jesper Bruun Munkegaard Hvid, Energinet, 02-01-2025.

IPCC 2006, 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Prepared by the National Greenhouse Gas Inventories Programme, Eggleston H.S., Buendia L., Miwa K., Ngara T. and Tanabe K. (eds). Published: IGES, Japan. Available at:
<http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html>

³ Except offshore gas turbines.

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrechtsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Andersen, T.A., Tougaard, S.L., Arendal, L. S. H., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott Bentsen, N., Baunbæk, L., & Hansen, M.G. 2026. Denmark's National Inventory Document 2026. Emission Inventories 1990-2024 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE - Danish Centre for Environment and Energy, 955 pp. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_700-800/SR706.pdf

3 Oil and gas extraction (Fugitive emissions from fuels)

This chapter includes fugitive emissions from fuels in the CRF sector 1B. The sources included in the Danish emission inventory and in this projection are listed in Table 3.1. The following chapters describe the methodology, activity data, emission factors and emissions in the projection. Detailed descriptions of the emission inventory for the historical years are included in Plejdrup et al. (2021) and Nielsen et al. (2026).

Table 3.1 List of the IPCC sectors and corresponding SNAP codes for the categories included in the Danish emission inventory model for greenhouse gases from the fugitive emission sector.

IPCC sectors	SNAP code	SNAP name	Activity
1.B.1.a	050103	Storage of solid fuel	Coal (storage)
1.B.2.a.1	050204	Exploration of oil	Oil
1.B.2.a.3	050206	Offshore loading of oil	Oil
1.B.2.a.3	050207	Onshore loading of oil	Oil
1.B.2.a.4	040101	Petroleum products processing	Oil
1.B.2.a.4	040103	Other processes in petroleum industries	Oil
1.B.2.a.4	040104	Storage and handling of petroleum products in refinery	Oil
1.B.2.a.4	040105	Other (catalytic regeneration)	Oil
1.B.2.a.4	050208	Storage of crude oil	Oil
1.B.2.a.5	050503	Service stations (including refuelling of cars)	Oil
1.B.2.a.6	050210	Abandoned wells	Oil
1.B.2.b.1	050304	Exploration of gas	Natural gas
1.B.2.b.2	050305	Production of gas	Natural gas
1.B.2.b.4	050601	Natural gas transmission	Natural gas
1.B.2.b.5	050603	Natural gas distribution	Natural gas
1.B.2.b.5	050604	Town gas distribution	Natural gas
1.B.2.b.5	050606	Post-meter - industrial and power plants	Natural gas
1.B.2.b.5	050607	Post-meter - commercial and residential	Natural gas
1.B.2.b.5	050608	Post-meter - natural gas fired vehicles	Natural gas
1.B.2.c.2.1.ii	050699	Venting in gas storage	Venting
1.B.2.c.2.i	090203	Flaring in oil refinery	Flaring
1.B.2.c.2.ii	090298	Flaring in gas storage	Flaring
1.B.2.c.2.ii	090299	Flaring in gas transmission and distribution	Flaring
1.B.2.c.2.iii	090206	Flaring in oil and gas extraction	Flaring

3.1 Methodology

The methodology for the emission projection corresponds to the methodology in the annual emission inventory, based on the IPCC Guidelines (IPCC, 2006, 2019) and the EMEP/EEA Guidebook (EMEP/EEA, 2023).

Activity data are based on an official projection by the Danish Energy Agency (Denmark's Energy and Climate Outlook – DECO26) on production of oil and gas, and on flaring in upstream oil and gas production and on fuel consumption (DEA, 2026).

Emission factors are based on either the EMEP/EEA guidelines (EMEP/EEA, 2023), IPCC guidelines (IPCC, 2006, 2019) or are country-specific emission factors based on data for the latest historical years.

3.2 Activity data

Oil and gas production in the Energy and Climate Outlook (DEA, 2026) is shown in Figure 3.1. The production of oil is assumed to increase from 2025 to 2030, followed by a decreasing trend until 2050. The gas production is expected to show a smaller increase from 2025-2031, also followed by a decreasing trend until 2050. Both oil and gas production shows a large decrease from 2041-2043. The trends are in line with the deal agreed by the Danish Parliament in 2020 to phase-out fossil fuel extraction in the North Sea by 2050.

The Energy and Climate Outlook includes production from existing fields and new fields based on existing technology, technological resources (estimated additional production due to new technological initiatives) and prospective resources (estimated production from new discoveries). Further, the projected production includes flaring in upstream oil and gas production. According to Denmark's Energy and Climate Outlook (DEA, 2026), the flaring amounts are expected to decrease from 2025 until a phase-out in 2050. A large decrease is expected from 2041-2043 in line with the oil and gas production. Flaring related to exploration of oil and gas is not included in the Energy and Climate Outlook, and therefore this activity is not included in the projection.

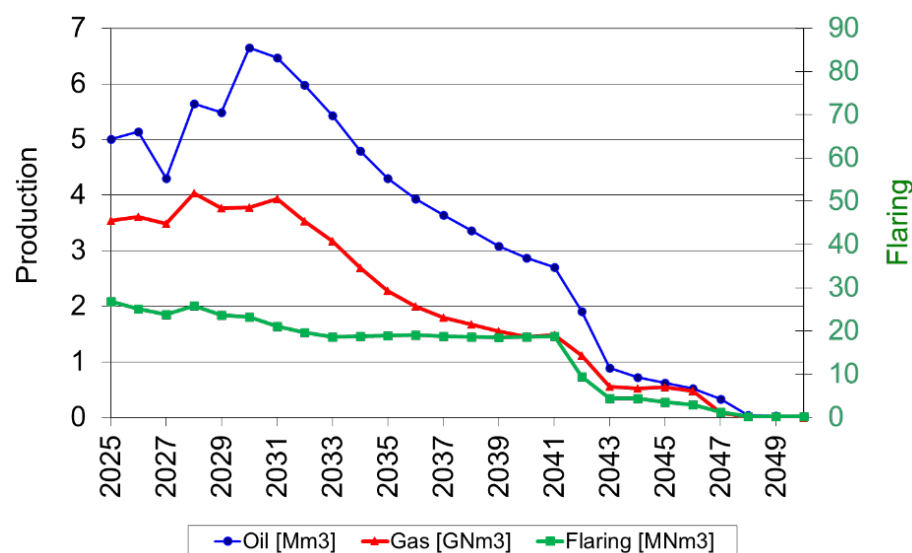


Figure 3.1 Projection of oil and gas production (DEA, 2026).

The DEA Energy and Climate Outlook of the production of oil and gas is used in the projection of emissions from several sources: production of oil and natural gas, transport of oil in pipelines, onshore and offshore loading of ships, and flaring in upstream oil and gas production.

Data from the DEA Energy and Climate Outlook are applied in the projection of fugitive emissions from fuels for the sources transmission of natural gas, distribution of natural gas, and distribution of town gas. Consumption of natural gas is used as proxy to project transmission of natural gas, and the consumption of town gas is used as a proxy for the fugitive losses from town gas distribution.

The fuel consumption and flaring rates for refineries are assumed to be constant for the projection period according to the Energy and Climate Outlook.

3.3 Emission factors

For some sources, the emission factors are based on the IPCC Guidelines (IPCC, 2006, 2019) and the EMEP/EEA Guidebook (EMEP/EEA, 2023). This is the case for offshore loading of oil to ships and flaring in upstream oil and gas production. For offshore loading of ships, the emission factors in the IPCC Guidelines (IPCC, 2019) are used with the assumption of equal amount of loading with and without VRU. The CH₄ emission factors for onshore loading in historical years are based on data from the harbour terminal. The emission factor for the latest historical year is used in the projection. The CH₄ emissions from the raw oil terminal in the projection period are estimated as the emission in the latest historical year scaled to the annual oil production. The standard emission factor from IPCC (2019) for CO₂ from transport of oil in pipelines is applied.

Emissions of CO₂ for flaring in upstream oil and gas production and at refineries are based on EU ETS for the emission inventory for historical years. For calculation of CO₂ emissions from flaring in upstream oil and gas production, the average emission factor based on EU ETS data for the latest five historical years is applied for the projection years.

The CH₄ emission factor for flaring in refineries in historical years is based on detailed fuel data from one of the two refineries (Statoil, 2009).

The N₂O emission factor is taken from the 2019 IPCC Guidelines for flaring in upstream oil and gas production and at refineries.

In the projection of emissions from flaring in refineries the emission factors for the latest historical year are applied, in correspondence with the approach in the Energy and Climate Outlook, where the flaring rates for refineries are kept constant, at the level for the latest historical year. Emissions from processing in refineries are kept constant for the projection years at the average level for the latest five historical years.

For remaining sources where the emissions in historical years are given by the companies in annual reports or environmental reports, implied emission factors for the average of the latest five historical years are applied for the projection years. This approach is applied for transmission of natural gas, distribution of natural gas and town gas, refinery processes, and for venting and flaring in gas storage and treatment plants.

3.4 Emissions

Most of the emissions are calculated due to the standard formula (Equation 3.1) while the emissions in the latest five historical years (only the last historical year for refineries, see Section 3.3), given in e.g. annual reports, are adopted for the remaining sources.

$$(3.1) \quad E_{s,t} = AD_{s,t} * EF_{s,t}$$

where E is the emission, AD is the activity data and EF is the emission factor for the source s in the year t.

Figure 3.2 includes CH₄ emission on sub-sector level in selected historical years and projection years. The total fugitive CH₄ emission is expected to show an increase from 2024 to 2025 mainly due to the increase of oil and gas

production in the Energy and Climate Outlook (DEA, 2026). A decreasing trend is expected for the projection years 2025-2050. The trend is mainly caused by a variation in emissions from oil and gas production. The low emissions in 2020-2023 are due to a decrease in oil and especially gas production, mainly due to the shutdown of the Tyra platform for redevelopment. The large oil and gas production field Tyra II was resumed in 2024 and the restart of production from the Tyra facilities and the associated fields is reflected in the expected increase in the oil and gas production in 2025.

The flaring amounts for refineries are assumed to be constant for the projection period according to the Energy and Climate Outlook (DEA, 2026), and correspondingly the emissions from flaring in refineries for the latest historical year are applied for the projection years.

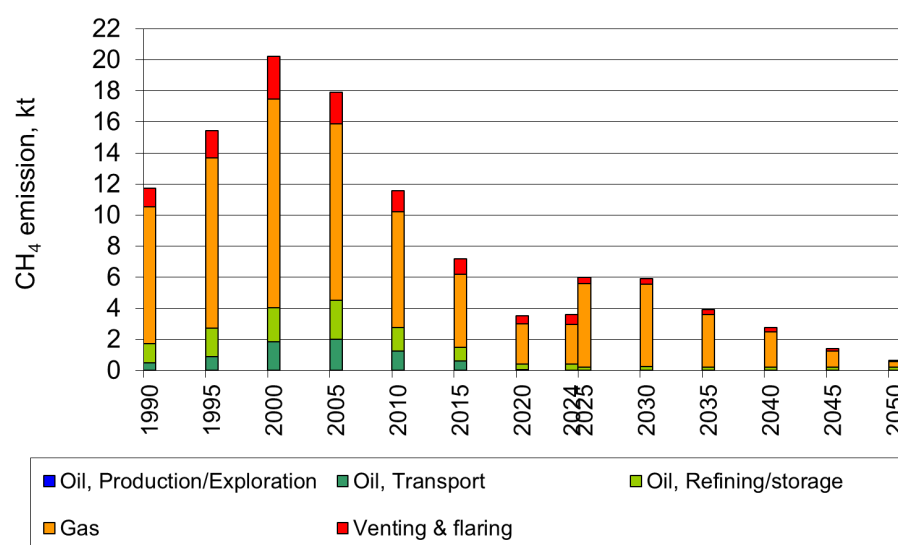


Figure 3.2 CH₄ emissions in selected historical years (1990, 1995, 2000, 2005, 2010, 2015, 2020 and 2024, including exploration of oil and gas) and projection years (2025, 2030, 2035, 2040, 2045, 2050, excluding exploration of oil and gas).

By far the largest source of fugitive emissions of CO₂ is flaring in upstream oil and gas production (Figure 3.3). CO₂ emissions peaked in 1999 and have shown a decreasing trend over the following historical years. In the projection years, the annual emission from flaring in upstream oil and gas production is more constant. The CO₂ emission from offshore flaring is estimated from the projected flaring rates (DEA, 2026) and an average emission factor for the latest five historical years. The average CO₂ emission factor applied in the projection years is 2.536 kg per Nm³.

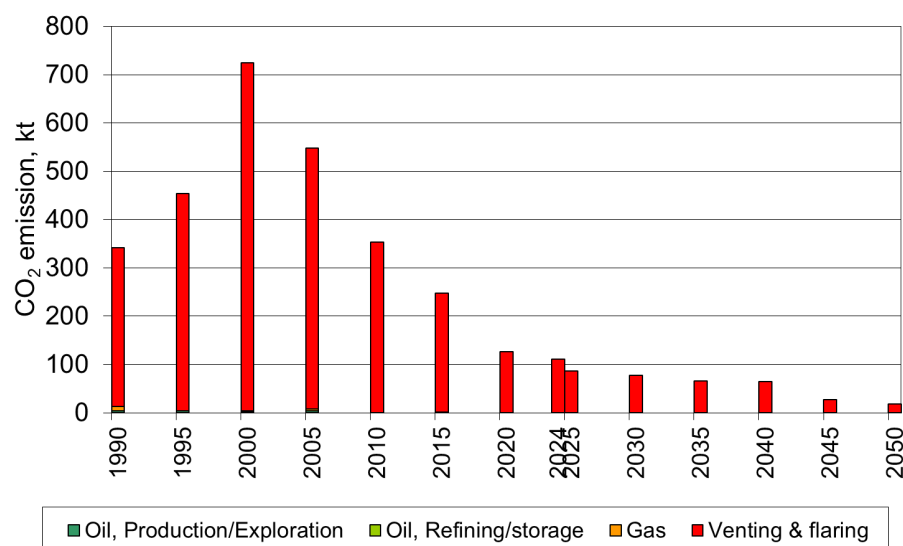


Figure 3.3 CO₂ emissions in selected historical years (1990, 1995, 2000, 2005, 2010, 2015, 2020 and 2024, including exploration of oil and gas) and projection years (2025, 2030, 2035, 2040, 2045, 2050, excluding exploration of oil and gas).

The summarised greenhouse gas emissions for selected historical years and projection years are shown in Figure 3.4 on sub-sector level. The main source of fugitive GHG emissions is CO₂ from offshore flaring, but also upstream oil and gas production, oil storage at the crude oil terminal, and fugitive emissions from refineries contribute significantly. Emissions from onshore activities (storage of oil and loading of ships) have shown a large decrease from 2005 to 2016 due to new technology at the oil terminal and at the harbour terminal. The only source of N₂O emissions in the fugitive emission sector is flaring in upstream oil and gas production, at refineries and in gas storage and treatment plants. The fugitive N₂O emission is very limited.

The GHG emissions reached a maximum in year 1999 and show a decreasing trend in the later historical years and to a lesser degree in the projection years. The decrease owes to decreasing production of oil and natural gas, and to better technologies leading to less flaring on the offshore installations.

Emissions from exploration of oil and gas are not included in the projected emissions, but only in historical years. The maximum GHG emission from exploration occurred in 2002, where this source contributed 0.5 % of the total fugitive GHG emission (second and third highest emission occurred in 1990 and 1998 and contributed 0.3 % and <0.01 %, respectively).

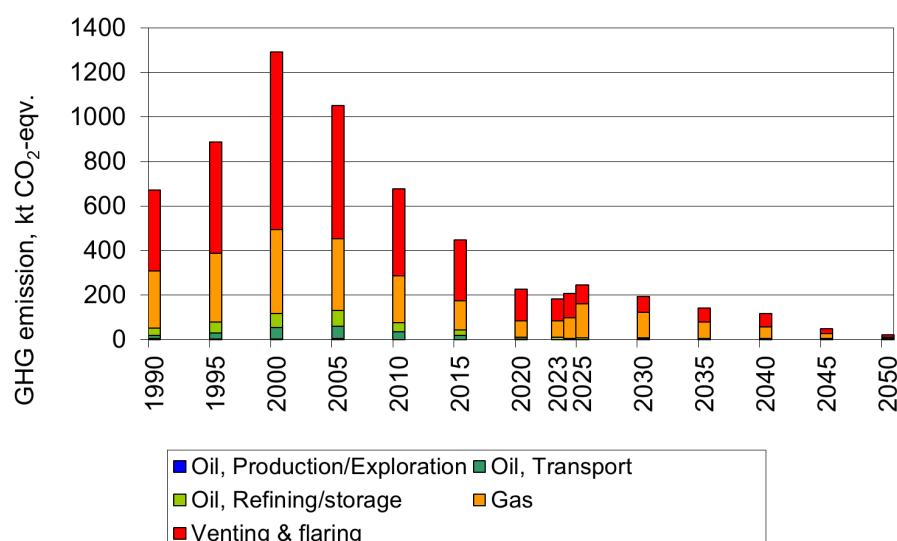


Figure 3.4 GHG emissions in selected historical years (1990, 1995, 2000, 2005, 2010, 2015, 2020 and 2024, including exploration of oil and gas) and projection years (2025, 2030, 2035, 2040, 2045, 2050, excluding exploration of oil and gas).

3.5 Model description

The model for projecting fugitive emissions from fuels, the “Fugitive emissions projection model”, is created in Microsoft Excel. The projection model is built in accordance with the model used in the national emission inventory system; the “Fugitive emission model”. For sources where data for the historical years are used to estimate emissions in the projection years, the “Fugitive emissions projection model” links to the “Fugitive emission model”. Historical emission from Refineries and transmission/distribution of gas are treated in separate workbook models (“Refineries” and “GasTransport”). The names and content of the models for the fugitive sector are listed in Table 3.2.

Table 3.2 Names and content of the models for the fugitive sector.

Name	Content
Fugitive emissions projection model	Activity data and emission factors for extraction of oil and gas, loading of ships and storage in oil tanks at the oil terminal for the historical years plus projected years and projected activity rates and emission factors for the projection years. Further, the resulting emissions for the projection years for all sources in the fugitive sector are stored in the worksheet “Projected emissions”.
Fugitive emissions model	Activity data and emission factors for extraction of oil and gas, loading of ships and storage in oil tanks at the oil terminal for the historical years.
Refineries	Activity data and emission factors for refining and flaring in refineries for the historical years.
GasTransport	Activity data and emission factors for transmission and distribution of natural gas and town gas for the historical years.

Activity data, emission factors, calculations and results are kept in separate sheets in the sub models. Changing the data in the input data tables or emission factor tables will automatically update the projected emissions.

3.6 References

Danish Energy Agency, 2026: Denmark's Energy and Climate Outlook.

EMEP/EEA, 2023: EMEP/EEA air pollutant emission inventory guidebook – 2023. Available at:

<https://www.eea.europa.eu/en/analysis/publications/emep-eea-guide-book-2023> (02-03-2026).

IPCC, 2006: 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Available at:

<http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html> (02-03-2026).

IPCC, 2019: 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Available at:

<https://www.ipcc-nggip.iges.or.jp/public/2019rf/index.html> (02-03-2026).

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrektsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Andersen, T.A., Tougaard, S.L., Arendal, L. S. H., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., ScottBentsen, N., Baunbæk, L., & Hansen, M.G. 2026. Denmark's National Inventory Document 2026. Emission Inventories 1990-2024 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE – Danish Centre for Environment and Energy, 955 pp. Available at:

https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_700-800/SR706.pdf

Plejdrup, M.S., Nielsen, O.-K. & Nielsen, M. 2021. The Danish emission inventory for fugitive emissions from fuels. Aarhus University, DCE – Danish Centre for Environment and Energy, 61 pp. Scientific Report No. 463. Available at: <http://dce2.au.dk/pub/SR463.pdf> (02-03-2026).

Statoil A/S, 2009: Personal communication. September 2009.

4 Industrial processes and product use

4.1 Sources

Industrial Processes and Product Use (IPPU) includes the CRT categories 2A Mineral Industries, 2B Chemical Industries, 2C Metal Industries, 2D Non-Energy Products from Fuels and Solvent Use, 2E Electronics Industry, 2F Product Use as Substitutes for Ozone Depleting Substances and 2G Other Product Manufacturing and Use. A range of sources is covered within each of these categories; the included sources are shown in Table 4.1.

Table 4.1 Sources/processes included in the projection of process emissions.

IPCC code		Sources/processes	SNAP code
2A	Mineral industry	2A1 Cement production	04 06 12
		2A2 Lime production	04 06 14
		2A3 Glass production	04 06 13
		2A4 Other process uses of carbonates	
		- 2A4a Brickworks	04 06 91
		- 2A4a Expanded clay	04 06 92
		- 2A4b Other uses of soda ash	04 06 19
		- 2A4d Flue gas cleaning	04 06 18
		- 2A4d Stone wool production	04 06 18
2B	Chemical industry	2B10 Catalysts/fertilisers	04 04 16
2C	Metal industry	2C5 Lead production	03 03 07
2D	Non-energy products from fuels and solvent use	2D1 Lubricant use	06 06 04
		2D2 Paraffin wax use	06 06 04
		2D3 Other	
		- Use of urea in catalysts	06 06 07
		- Road paving with asphalt	04 06 11
2E	Electronics industry	2E5 Fibre optics	06 05 08
2F	Product use as substitutes for ozone depleting substances	2F1 Refrigeration and air conditioning	06 05 02
		2F2 Foam blowing agents	06 05 04
		2F4 Aerosols	06 05 06
		2F5 Solvents	06 05 08
2G	Other product manufacture and use	2G1 Electrical equipment	
		- 2G1b Use of electrical equipment	06 05 07
		2G2 SF ₆ and PFCs from product use	
		- 2G2c Double-glazed windows	06 05 08
		2G3 N ₂ O from product use	
		- 2G3a Medical applications	06 05 01
		- 2G3b Propellant in aerosol cans	06 05 06
		2G4 Other product use	
		- Fireworks	06 06 01
		- Barbeques	06 06 04
		- Tobacco	06 06 02

The projection of emissions from industrial processes is based on the national emission inventory (Nielsen et al., 2026).

4.2 Methodology

The projection of greenhouse gas (GHG) emissions includes CO₂, N₂O, CH₄, HFCs, PFCs and SF₆.

For HFCs, PFCs and SF₆, also known as F-gases, emission projections are based on an F-gas projection done by Poulsen (2026a and 2026b).

The fluorinated gases all contain fluorine, hence the name F-gases. None of the F-gases are produced in Denmark. The emission of these gases is therefore associated only with their use.

Emissions from cement production, construction related sources (e.g. mineral wool production) and flue gas desulphurisation are projected using different activity/energy projections from the Danish Energy Agency.

For the remaining sources, emission projections are based on historical emissions.

For more detailed information on the methodologies and sources used within the different categories, find the relevant category descriptions in the sections 4.2.1 to 4.2.8 below.

4.2.1 F-gases

An account of the annual consumption and emission of F-gases is prepared by a consultant on behalf of the Danish Environmental Protection Agency (DEPA) (Poulsen, 2026a and 2026b). In this work, projections until 2050 are also prepared. Annual reports that contain both consumption and emission data are publicly available.

F-gases are powerful GHGs with global warming potentials (GWPs) between 138 (HFC-152a) and 23 500 (SF₆). Therefore, F-gases receive a great deal of attention in connection with GHG emission inventories. For many F-gas applications, the gases can be controlled and/or replaced, which has been, and continues to be, the case in Denmark. Data for the projections in this report take this into consideration.

Emissions are calculated with a model for the individual substances' life cycle over the time series, taking the emissions associated with the actual processes into consideration. The processes for refrigeration and high voltage equipment are filling up/topping up, operation and destruction. For foam, the processes are production of the products in which the substances are used as well as use and destruction of the product. The model has been developed and used in connection with the annual historic emission inventories for the Climate Convention; see Nielsen et al. (2026). As a result, the model corresponds with the guidelines produced for this purpose (IPCC, 2006). For details on the model and the calculation methodologies, refer also to the DEPA's annual reports produced as a basis for the F-gas inventories (Poulsen, 2026a).

The report and the data collected in Poulsen (2026a, b) provide emission projections generally based on steady state consumption with 2024 as the reference year. In connection with Danish regulation concerning the phasing out of powerful GHGs, cut-off dates in relation to the phasing out of individual substances are taken into account.

For all medium/large commercial refrigeration and stationary air-conditioning categories with high GWP refrigerants, the trend is projected as steady state until 2025, whereafter the consumption will decrease 20 % per year. Consumption of all HFCs is phased out from 2032 where the service ban for these (GWP>750) installations is enforced.

For mobile air-conditioning (MAC), the consumption also decreases with 20 % per year from 2026. The assumption is made with reference to a graduated increased effect of the MAC Directive require only HFOs in new person cars introduced to the EU market.

For heat pumps, only HFC-32 (GWP 677) is still used in new fillings. The projection of HFCs is steady state until 2026. From 2030 service ban with HFC's for heat pumps are introduced.

4.2.2 Mineral Industry

There are nine sources of GHG emissions within the CRF category 2.A Mineral Industry; production of cement, lime, glass, glass wool, bricks/tiles, expanded clay and stone wool along with other uses of soda ash and flue gas cleaning (desulphurisation), see Table 4.2.

Table 4.2 Sources/processes included in 2A Mineral Industry.

		Sources/processes
2A1	Cement production	Cement production
2A2	Lime production	Lime production (incl. lime produced in the sugar industry)
2A3	Glass production	Glass production Glass wool production
2A4	Other process uses of carbonates	Ceramics - Production of bricks/tiles - Production of expanded clay Other uses of soda ash Flue gas cleaning - at CHPs - at WIPs Stone wool production

CHP: Combined Heat and Power plants, WIP: Waste Incineration Plants.

Cement production is the major CO₂ source within industrial processes. Information on the emission of CO₂ until 2024 is based on the company reporting to EU ETS (Aalborg Portland, 2025). The emission from cement production for 2025-2050 is estimated by the DEA (2026), see Table 4.3.

Table 4.3 Projected emission from cement production, kt CO₂. (DEA, 2026)

	2025	2030	2035	2040	2045	2050
Cement production	855	827	848	890	913	942

Lime is used for a number of different applications. There are no projected production values available for lime production and the emission for 2025-2050 is therefore estimated as a constant based on historical years. Like lime, soda ash has many applications and like lime the category of "other uses of soda ash" is projected as a constant based on historical years. The same projection method is also applied for glass production and production of expanded clay products.

The production of building materials, i.e. stone wool, glass wool and bricks/tiles, for 2025-2050 is estimated by extrapolating the 2024 emission for each category with the projected production value for the construction sector (DEA, 2026).

Consumption of lime for flue gas cleaning depends primarily on the consumption of coal at central heating plants (CHPs) and waste at waste incineration plants (WIPs). The emissions from flue gas desulphurisation for 2025-2050 are estimated as a sum of the two sources by extrapolating using the trend of the projected consumption of coal and waste from the energy projections (DEA, 2026).

The calculated emission projections are shown in Table 4.9 and Table 4.10.

4.2.3 Chemical Industry

There is only one source of GHG emissions within the emission projection of CRT category 2.B Chemical Industry; production of catalysts/fertilisers categorised under 2.B.10 Other.

There are no projected production values available for the production of catalysts/fertilisers; the emission for 2025-2050 is therefore estimated using the average of the five latest historical years.

Historically the emission in CO₂ equivalents (CO₂e) from chemical industry declines sharply in 2004 as the production of nitric acid ceased in mid-2004. Emissions also increase visibly from 2020 due to the introduction of new products for fabrication leading to N₂O emissions.

Calculated emission projections are shown in Table 4.9.

4.2.4 Metal Industry

There has been no production at Danish steelworks since 2006. There is also no planned reopening. SF₆ was used in magnesium production until 2000 and will also not be reintroduced.

There is a small emission of CO₂ from lead production. Production ceased during 2021 and reopened in 2022. Emissions from this source are projected as the constant average of 2020-2024 emissions.

4.2.5 Non-Energy Products from Fuels and Solvent Use

This category includes CO₂, CH₄ and N₂O emissions from the source categories 2.D.1 Lubricant use, 2.D.2 Paraffin wax use and 2.D.3 Other (Road paving with asphalt and use of urea in catalysts).

Table 4.4 Global Warming Potentials (GWPs) for substances in category 2D.

Substance	Typical use	GWP CO ₂ e
CO ₂	Lubricants, Paraffin wax use	1
CH ₄	Paraffin wax use	28
N ₂ O	Paraffin wax use	265

The projections for all included sources in this category, are based on the average emission of the five latest historical years. Calculated emission projections are shown in Table 4.9 and Table 4.11.

4.2.6 Electronic Industry

Fibre optics is the only source in CRT category 2E Electronic Industry. Fibre optics can lead to emissions of both HFC (HFC-23) and PFCs (PFC-14 and PFC-318) but these emissions are phased out (Poulsen, 2026b).

4.2.7 Product Uses as Substitutes for Ozone Depleting Substances

There are three sources of GHG emissions within the projection of the CRT category 2.F Product Uses as Substitutes for Ozone Depleting Substances (ODS); refrigeration and air conditioning (2.F.1), foam blowing agents (2.F.2) and aerosols (2.F.4).

Emission projections from this source category include six HFCs (HFC-32, HFC-125, HFC-134a, HFC-143a, HFC-152a and HFC-227ea) and one PFC (PFC-14).

- 2.F.1.a: HFC-32, -125 and -134a filled into commercial refrigeration units is reduced by about 15 % from 2025-2026 and thereafter by 50 % per year until the phase out by 2032. While HFC-143a filled into 2.F.1.a is kept constant until the phase out in 2032.
- 2.F.1.b: HFCs were banned from use in domestic refrigeration by 2006, and emissions are therefore fully phased out by 2024 and not part of the projection.
- 2.F.1.d: Transport refrigeration is projected using steady state until the phase put in 2032.
- 2.F.1.e: Emissions from mobile air-conditioning (MAC) are projected for 2025 using steady state, followed by an expected reduction of 20 % per year until these are fully phased out by 2032.
- 2.F.1.f: HFCs filled into stationary air-conditioning is also kept steady state until 2025, followed by annual reductions until the phase out in 2032. For heat pumps (part of 2.F.1.f), only HFC-32 is still relevant, the projection of HFC-32 is done as steady state until 2026, followed by a 50 % annual decrease.
- 2.F.4.b: Medical dose inhalers (MDIs) are projected with an annual reduction of 10 %.

HFCs

HFCs comprise a range of substances, of which the following, relevant for Denmark, are approved for inventory under the Climate Convention and the Kyoto Protocol (KP) with stated and approved GWP values.

Table 4.5 Global Warming Potentials (GWPs) for the HFCs.

Substance	Typical use	GWP CO ₂ e
HFC-32	Refrigeration (K2)	677
HFC-125	Refrigerants (K1-4)	3 170
HFC-134a	Refrigerants (K1-4), foam blowing and aerosols	1 300
HFC-143a	Refrigerants (K1-4)	4 800
HFC-152a	Refrigerants (K2) and foam blowing	138
HFC-227ea		3350

However, HFCs in Denmark are estimated in accordance with the trade names for HFC mixtures, Table 4.6 provides the “pure” HFC content of the mixtures.

Table 4.6 Relationship (mass %) between HFCs as calculated for the Climate Convention ("pure" HFCs) and the HFC mixtures used under trade names in Denmark.

Pure HFCs \ HFC mixtures	HFC-32	HFC-125	HFC-134a	HFC-143a	HFC-152a
	%	%	%	%	%
HFC-401a					13
HFC-402a		60			
HFC-404a		44	4	52	
HFC-407c	23	25	52		
HFC-507a		50		50	

HFCs are mostly used as refrigerants in stationary and mobile air-conditioning and refrigeration systems. A minor application is in insulation foams and foams of other types.

PFCs

PFCs comprise a range of substances, of which only PFC-14 (CF₄) is relevant for the projection of source category 2.F and approved for inventory under the Climate Convention and KP with stated and approved GWP values. The GWP value for PFC-14 is 6630. PFC-14 is used as cleaning fluid. The use of PFCs in Denmark is minor.

Calculated emission projections from 2.F Product uses as substitutes for ODS are done as steady state and are shown in Table 4.9 and Table 4.12.

4.2.8 Other Product Manufacture and Use

There are four sources of GHG emissions within the CRT category 2.G Other Product Manufacture and Use; Use of electrical equipment, SF₆ from other product uses, N₂O from product uses and Other product uses.

Table 4.7 Sources/processes included in category 2.G Other Product Manufacture and Use.

	Sources/processes
2.G.1 Electrical equipment	Use of electrical equipment
2.G.2 SF ₆ and PFCs from other product use*	SF ₆ from other product uses: - Double glazed windows - Laboratories/research - Running shoes
2.G.3 N ₂ O from product uses	N ₂ O from medical applications Propellant for pressure and aerosol products
2.G.4 Other	Other product uses - Fireworks - Tobacco - Charcoal for barbeques

* Only for historic years.

The different substances reported within category 2.G are shown in Table 4.8 along with the source categories responsible for their release and their respective GWPs.

Table 4.8 Global Warming Potentials (GWPs) for substances in category 2.G Other Product Manufacture and Use.

Substance	Typical use	GWP CO ₂ e
CO ₂	Fireworks	1
CH ₄	Fireworks, tobacco, charcoal for BBQs	28
N ₂ O	Anaesthetics, propellant, fireworks, tobacco, charcoal for BBQs	265
SF ₆	High voltage electrical equipment, double glazing, laboratories/research, running shoes	23 500

The annual F-gas report from Poulsen (2026a) contains both SF₆ consumption and emission data for both historic years and projected years until 2050. For more details on this report and the model it is based on, see the section 4.2.1 F-gases.

The emission projection for the source Use of electrical equipment (2.G.1) is available from Poulsen (2026a and 2026b). Emissions from the Use of electrical equipment cover SF₆ from high voltage equipment.

The emissions from SF₆ from other product uses cover SF₆ from double glazed windows, running shoes and use of SF₆ in laboratories/research. The use of SF₆ in connection with double-glazing was banned in 2002, and according to the F-gas model, the last remaining double-glazing panes where SF₆ has been used will have been disposed of in 2021 where the last emissions therefore will have occurred. Emissions from laboratories and shoes are also phased out.

The third source, N₂O from product uses, covers N₂O from medical use i.e. anaesthetics and N₂O used as propellant for pressure and aerosol products i.e. canned whipped cream. The emission projections for these sources are calculated as the constant average value of the five latest historical years.

The fourth source, Other product use, covers CO₂, CH₄ and N₂O emissions from the use of fireworks, tobacco and charcoal for barbeques. The emission projections for these sources are calculated as the constant average of the five latest historical years, except for the use of tobacco where emissions are estimated based on the trend of the historical years.

The calculated emission projections are shown in Table 4.9.

4.3 Emissions

The results of the GHG emission projections for the entire Industrial Processes and Product Use sector are presented in Table 4.9.

In 2024, 69 % of GHG emissions from IPPU originated from Mineral Industry (2.A). By 2050, the number will have increased to 86 % because emissions from Product uses as ODS substitutes (the second largest source in 2024) decrease more than those from Mineral Industry.

The second largest source category in 2024 was Product uses as substitutes for ODS (2.F) with 20 % of IPPU GHG emissions, but this source decreases rapidly and becomes 12 % in 2030, 4 % in 2035 and 0.3 % by 2040.

While GHG emissions from F-gasses are projected to decrease, other source categories like the use of paraffin candles are projected by steady state. By

2034, burning of candles is expected to be the second largest source of GHG emissions in IPPU after cement production.

Table 4.9 Projection of CO₂ process emissions, kt CO₂e.

Source Categories	1990	2005	2015	2020	2024	2025	2030	2035	2040	2045	2050
2A Mineral Industry	919	1556	1022	1320	939	927	898	921	965	989	1019
Hereof cement production	775	1363	932	1227	870	907	765	791	830	871	918
2B Chemical Industry	892	1.1	3.0	43.0	37.6	39.3	39.3	39.3	39.3	39.3	39.3
2C Metal Industry	61	16	0.20	0.09	0.06	0.07	0.07	0.07	0.07	0.07	0.07
2D Non-energy products from fuels and solvent use	72	139	112	101	93	102	102	102	102	102	102
2E Electronic industry*	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
2F Product uses as ODS substitutes	NO	889	452	317	269	271	142	43	3	1	1
2G Other product manufacture and use	27	48	154	67	30	32	31	31	31	31	31
Total	1970	2649	1743	1848	1369	1370	1213	1137	1140	1162	1192

NO: Not occurring. * Emissions occur from this sector in 2001, 2006-2014, 2017, 2019 and 2023.

The emission projections for the individual categories are presented in the following sections 4.3.1-4.3.7.

Figure 4.1 illustrates CO₂e emission projections for the entire industrial sector divided between pollutants. The figure shows that emissions from the IPPU sector are dominated by CO₂ and that of the F-gases HFCs contributes the most to GHG emissions. Different legislation on F-gases was introduced during the 2000s and even more legislation has been adopted to phase out F-gases in the coming years. As a result, F-gas emissions started to decrease at the end of the 2000s until 2021-2024 where a steady state in emissions was reached. Due to new taxes and bans already effectuated or soon to be effectuated, the F-gas emissions are expected to start decreasing again from 2026.

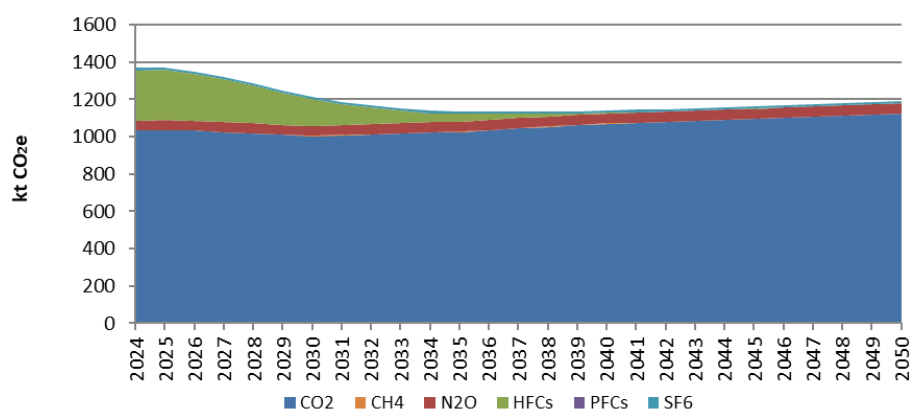


Figure 4.1 Time series for emissions, divided into individual pollutants.

4.3.1 Mineral Industry

Emission projections for mineral industries are shown in Table 4.10.

Table 4.10 Some historical emissions and emission projections for mineral industries (2.A), kt CO₂e.

		1990	2005	2015	2020	2023	2024	2025	2030	2035	2040	2045	2050
2A1	Cement production	775	1363	932	1227	982	870	855	827	848	890	913	942
2A2	Lime production	51	49	24	10	8	1	1	1	1	1	1	1
2A3	Glass production	14	11	8	8	9	8	8	8	8	8	8	8
2A3	Glass wool production	2	2	1	2	2	2	2	2	2	2	2	2
2A4a	Bricks/tiles production	26	35	20	27	20	14	15	15	17	18	19	20
2A4a	Expanded clay production	20	19	9	16	14	21	19	19	19	19	19	19
2A4b	Other uses of soda ash	14	18	7	16	16	13	16	16	16	16	16	16
2A4d	Flue gas cleaning	10	51	16	8	7	6	6	5	4	4	4	3
2A4d	Stone wool production	7	8	6	5	3	5	5	6	6	6	7	7
Total		919	1556	1022	1320	1060	939	927	898	921	965	989	1019

The largest source of emissions in Mineral Industry is cement production; 84-93 %. Cement production has a decreasing trend in the projected years until 2030 followed by an increasing trend for 2030-2050, the development is due to the projected cement production presented in Table 4.3. The second largest emission source for projected years is expanded clay production; 2 % of the mineral industry.

The mineral industry in turn amounts to 68-86 % of the IPPU sector GHG emissions for the projected years.

In 2024, the contribution from category 2A was 2.5 % of the Danish total greenhouse gas emission excluding LULUCF and indirect sources. In 2050, this contribution is estimated to have increased to 7.1 %.

4.3.2 Chemical Industry

There is only one source of GHG emissions within this category after 2024; production of catalysts/fertilisers categorised under 2.B.10 Other. There is therefore no additional disaggregation available to the data presented in Table 4.9.

Emissions from catalyst production are projected as the constant average of the latest five historical years.

4.3.3 Metal Industry

Lead production is the only source of GHG emissions from metal industries after 2024. There is therefore no additional disaggregation available to the data presented in Table 4.9. Projected emissions are based on historic years.

4.3.4 Non-Energy Products from Fuels and Solvent Use

All sources within this category were projected as the constant average of the five latest historical years. Category 2.D makes up 7-9 % of IPPU CO₂ equivalent emissions in 2025-2050.

Table 4.11 Emissions for Non-Energy Products from Fuels and Solvent Use.

	Pollutant	Unit	1990	2005	2015	2020	2024	2025	2030	2035	2040	2045	2050
2D1 Lubricant use	CO ₂	kt	50	38	32	32	32	32	32	32	32	32	32
2D2 Paraffin wax use	CO ₂	kt	22	100	71	59	52	60	60	60	60	60	60
2D3 Other (urea, road paving)	CO ₂	kt	-	0.01	8	9	9	9	9	9	9	9	9
2D Total CO ₂	CO ₂	kt	71	138	111	100	92	101	101	101	101	101	101
2D2 Paraffin wax use	CH ₄	t	0.9	4.2	3.0	2.5	2.1	2.5	2.5	2.5	2.5	2.5	2.5
2D3 Other	CH ₄	t	11	17	15	17	25	20	20	20	20	20	20
2D Total CH ₄	CH ₄	t	12	21	18	19	27	23	23	23	23	23	23
2D2 Paraffin wax use	N ₂ O	t	0.2	0.8	0.6	0.5	0.4	0.5	0.5	0.5	0.5	0.5	0.5
2D Total N ₂ O	N ₂ O	t	0.2	0.8	0.6	0.5	0.4	0.5	0.5	0.5	0.5	0.5	0.5
2D Total CO ₂ e	CO ₂ e	kt	72	139	112	101	93	102	102	102	102	102	102

4.3.5 Electronic Industry

There are no emissions from this category in the projection years; 2025-2050 (Poulsen, 2026b).

4.3.6 Product Uses as Substitutes for Ozone Depleting Substances

The category 2.F Product Uses as Substitutes for ODS is dominated by emissions from refrigeration and air conditioning (CFT category 2.F.1).

Table 4.12 Emissions for Product Uses as Substitutes for Ozone Depleting Substances, kt CO₂e.

	1995	2005	2015	2020	2024	2025	2030	2035	2040	2045	2050
2F1a Commercial refrigeration	33	575	290	163	101	104	28	1.1	0.003	0.001	0.0003
2F1b Domestic Refrigeration	7	12	5	1.4	0.3	0	-	-	-	-	-
2F1d Transport Refrigeration	0.01	9	8	5	7	10	16.1	2.2	0.08	0.03	0.01
2F1e Mobile Air-Conditioning	2	71	67	63	53	53	18	0.33	0.13	0.05	0.02
2F1f Stationary air-conditioning	3.2	64	54	74	96	91	74	36	0.5	0.002	0.0001
2F2a Closed Cells	50	122	12	-	-	-	-	-	-	-	-
2F2b Open Cells	137	16	0.9	0.7	0.4	0.34	0.03	0.01	-	-	-
2F4a Metered Dose Inhalers	5.9	6.8	6.9	7.1	9.1	9	5	3	2	1.0	0.6
2F4b Other aerosols	-	-	0.39	2.56	2.33	2.31	1.60	0.95	0.56	0.33	0.19
2F5 Solvents*	-	14	7	-	-	-	-	-	-	-	-
Total	238	889	452	317	269	271	142	43	3.0	1.5	0.8

* Occurred in 2000-2003.

4.3.7 Other Product Manufacture and Use

Emission projections for other product manufacture and use are not shown at a more disaggregated level due to the low emissions from this source. SF₆ from electrical equipment contributes the most to the GHG emissions in the projection time series, followed by N₂O emissions from medical applications. Overall emissions from this category are presented in Table 4.9.

4.4 Recalculations

Recalculations compared to the previous projection are caused by the update of the historical years, updates in the activity/energy projections from the Danish Energy Agency (DEA, 2026) and updates in the F-gas projection done by Poulsen (2026a and 2026b).

The largest change in historical data that also affect the projections are changes to the lime production category. The closure of Faxe Kalk and correction of statistical data for the lime production results in a decrease of 48 kt CO₂ per year in the projection.

There are no updates to the methodology of the emission projection calculations.

4.5 References

DEA, 2026: Danish Energy Agency. Denmark's Energy and Climate Outlook.

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrechtsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Andersen, T.A., Tougaard, S.L., Arendal, L. S. H., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., ScottBentsen, N., Baunbæk, L., & Hansen, M.G. 2026. Denmark's National Inventory Document 2026. Emission Inventories 1990-2024 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE - Danish Centre for Environment and Energy, 955 pp. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_700-800/SR706.pdf

Poulsen, 2026a: Tomas Sander Poulsen, Provice ApS. Danish consumption and emission of F-gases - 2024. Ministry of Environmental and Gender Equality, Environmental Protection Agency, Environmental Project no. 2311, January 2026. Available at: <https://mst.dk/publikationer/2026/januar/danish-consumption-and-emission-of-f-gases-2024> (05/02-2026)

Poulsen, 2026b: Excel spreadsheet containing projection assumptions for F-gasses for 2025-2050. Prepared by Tomas S. Poulsen, Provice ApS. (Not publicly available)

Aalborg Portland, 2025: EU-ETS data for 2006-2024, CO₂-opgørelse og afrapportering 2024. Aalborg Portland A/S. Fremstilling af klinker (cement). (Confidential).

5 Transport and other mobile sources

The DEMOS (Danish Emission model system for Mobile Sources) model developed at DCE, Aarhus University, is used to calculate the historical emission inventories and projections for mobile sources. The DEMOS model system comprises database models for road transport (DEMOS-Road), aviation (DEMOS-Aviation), navigation (DEMOS-Navigation), railways (DEMOS-Rail) and non-road mobile machinery (DEMOS-NRMM).

In the emission inventories, all activity rates and emissions are defined in SNAP sector categories (Selected Nomenclature for Air Pollution), according to the CollectER system.

For mobile sources, the aggregation of emission results into the formats used by the UNFCCC and UNECE Conventions is made by using the code correspondence information shown in Table 5.1. In the case of mobile sources, the CRF (Common Reporting Format) and NFR (National Format for Reporting) used by the UNFCCC and UNECE Conventions, respectively, are similar.

Table 5.1 SNAP – CRF/NFR correspondence table for mobile sources.

SNAP classification	CRF/NFR classification
0701 Road traffic: Passenger cars	1A3bi Road transport: Passenger cars
0702 Road traffic: Light duty vehicles	1A3bii Road transport: Light duty vehicles
0703 Road traffic: Heavy duty vehicles	1A3biii Road transport: Heavy duty vehicles
0704/0705 Road traffic: Mopeds and motorcycles	1A3biv Road transport: Mopeds & motorcycles
0706 Road traffic: Evaporation	1A3bv Road transport: Evaporation
0707 Road traffic: Brake and tire wear	1A3bvi Road transport: Brake and tire wear
0708 Road traffic: Road abrasion	1A3bvii Road transport: Road abrasion
0801 Military	1A5b Other, Mobile
0802 Railways	1A3c Railways
080204 Train contact wire wear	1A3c Railways
080205 Wheel and rail wear	1A3c Railways
080206 Brake wear	1A3c Railways
0803 Inland waterways	1A5b Other, Mobile
080402 National sea traffic	1A3dii National navigation (Shipping)
080403 National fishing	1A4ciii Agriculture/Forestry/Fishing: National fishing
080404 International sea traffic	1A3di (i) International navigation (Shipping)
080501 Dom. airport traffic (LTO < 1000 m)	1A3aii (i) Civil aviation (Domestic, LTO)
080502 Int. airport traffic (LTO < 1000 m)	1A3ai (i) Civil aviation (International, LTO)
080503 Dom. cruise traffic (> 1000 m)	1A3aii (ii) Civil aviation (Domestic, Cruise)
080504 Int. cruise traffic (> 1000 m)	1A3ai (ii) Civil aviation (International, Cruise)
080505 Dom. airport traffic (tyre and brake wear)	1A3aii (i) Civil aviation (Domestic, LTO)
080506 Int. airport traffic (tyre and brake wear)	1A3ai (i) Civil aviation (International, LTO)
0806 Agriculture	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0807 Forestry	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0808 Industry	1A2gvii Manufacturing industries/Construction (mobile)
0809 Household and gardening	1A4bii Residential: Household and gardening (mobile)
0811 Commercial and institutional	1A4aii Commercial/Institutional: Mobile

Road traffic evaporation, brake and tire wear, and road abrasion (SNAP codes 0706, 0707 and 0708), train contact wire wear, wheel and rail wear and brake wear (SNAP codes 080204, 080205 and 080206) and domestic and international

aviation tyre and brake wear (SNAP codes 080505 and 080506) are not a part of the CRF list since no greenhouse gases are emitted from these sources.

For aviation, LTO (Landing and Take Off)⁴ refers to the part of flying, which is below 3000 ft. According to the UNFCCC reporting guidelines, the emissions from domestic LTO (0805010) and domestic cruise (080503) and flights between Denmark and Greenland or the Faroe Islands are regarded as domestic flights.

Agricultural and forestry non-road machinery (SNAP codes 0806 and 0807) is accounted for in the Agriculture/forestry (1A4cii) sector. Fishing activities (SNAP code 080403) regardless of vessel flag is reported under 1A4ciii.

The description of methodologies and references for the transport part of the Danish inventory is given in two sections, one for road transport and one for the other mobile sources.

The fuel consumption used in the emission projections follow the sector split as the official energy statistics elaborated by the Danish Energy Agency (DEA). However, based on bottom-up calculations within sectors, DCE in a few cases make different splits of non-road mobile and stationary consumption compared to the fuel splits in the latest official Danish energy forecast “Danish Energy and Climate Outlook 2026” (DECO26) provided by DEA (2025).

5.1 Methodology and references for road transport

For road transport, the detailed methodology (Tier 3) is used to make annual estimates of the Danish emissions, as described in the EMEP/EEA Air Pollutant Emission Inventory Guidebook (EMEP/EEA, 2025). The calculations are made with the DEMOS-Road (Danish Emission model system for Mobile Sources) model developed at DCE, Aarhus University, using the European COPERT 5 model methodology (EMEP/EEA, 2025). In COPERT, fuel consumption and emission simulations can be made for operationally hot engines, considering gradually stricter emission standards and emission degradation due to catalyst wear. Furthermore, the emission effects of cold-start and evaporation are simulated.

A final fuel balance adjustment is made to account for the statistical fuel sold according to Danish energy statistics/projections.

5.1.1 Vehicle fleet and mileage data

Corresponding to the COPERT 5 fleet classification, DEMOS-Road groups all present and future vehicles in the Danish fleet into vehicle classes, sub-classes and layers. The layer classification is a further division of vehicle sub-classes into groups of vehicles with the same average fuel consumption and emission behaviour, according to EU emission legislation levels. Table 5.2 gives an overview of the different model classes and sub-classes.

⁴ A LTO cycle consists of the flying modes approach/descent, taxiing, take off and climb out. In principle, the actual times-in-modes rely on the actual traffic circumstances, the airport configuration, and the aircraft type in question.

Table 5.2 Model vehicle classes and sub-classes.

Vehicle classes	Fuel type	Engine size/weight
Passenger cars	Gasoline/Diesel/PHEV	< 0.8 l.
Passenger cars	Gasoline/Diesel/PHEV	0.8 - 1.4 l.
Passenger cars	Gasoline/Diesel/PHEV	1.4 – 2 l.
Passenger cars	Gasoline/Diesel/PHEV	> 2 l.
Passenger cars	2-stroke	
Passenger cars	LPG	
Passenger cars	CNG	
Passenger cars	Electric	<= 1450 kg
Passenger cars	Electric	1451-1725 kg
Passenger cars	Electric	1726-1950 kg
Passenger cars	Electric	> 1950 kg
Light commercial vehicles (LCV)	Gasoline/Diesel/LPG/CNG/PHEV/BEV	<1305 kg
Light commercial vehicles (LCV)	Gasoline/Diesel/LPG/CNG/PHEV/BEV	1305-1760 kg
Light commercial vehicles (LCV)	Gasoline/Diesel/LPG/CNG/PHEV/BEV	>1760 kg
Trucks	Gasoline	
Trucks	Diesel/CNG	Rigid 3,5 - 7,5t
Trucks	Diesel/CNG	Rigid 7,5 - 12t
Trucks	Diesel/CNG	Rigid 12 - 14 t
Trucks	Diesel/CNG	Rigid 14 - 20t
Trucks	Diesel/CNG	Rigid 20 - 26t
Trucks	Diesel/CNG	Rigid 26 - 28t
Trucks	Diesel/CNG	Rigid 28 - 32t
Trucks	Diesel/CNG	Rigid >32t
Trucks	Diesel/CNG	TT/AT 14 - 20t
Trucks	Diesel/CNG	TT/AT 20 - 28t
Trucks	Diesel/CNG	TT/AT 28 - 34t
Trucks	Diesel/CNG	TT/AT 34 - 40t
Trucks	Diesel/CNG	TT/AT 40 - 50t
Trucks	Diesel/CNG	TT/AT 50 - 60t
Trucks	Diesel/CNG	TT/AT >60t
Trucks	Electric	Rigid 3,5 - 7,5t
Trucks	Electric	Rigid 7,5 - 12t
Trucks	Electric	Rigid 12 - 14 t
Trucks	Electric	TT/AT >60t
Urban buses	Gasoline	
Urban buses	Diesel/CNG/Electric	< 15 tonnes
Urban buses	Diesel/CNG/Electric	15-18 tonnes
Urban buses	Diesel/CNG/Electric	> 18 tonnes
Coaches	Gasoline	
Coaches	Diesel/CNG/Electric	< 15 tonnes
Coaches	Diesel/CNG/Electric	15-18 tonnes
Coaches	Diesel/CNG/Electric	> 18 tonnes
Mopeds	Gasoline	
Mopeds	Electric	
Motorcycles	Gasoline	2 stroke
Motorcycles	Gasoline	< 250 cc.
Motorcycles	Gasoline	250 – 750 cc.
Motorcycles	Gasoline	> 750 cc.
Motorcycles	Electric	

PHEV: Plug in hybrid electric vehicle; BEV: Battery electric vehicle; CNG: Compressed natural gas; TT: Truck-Trailer; AT: Articulated Truck

To support the emission projections fleet and annual mileage data are provided by DTU Transport for the vehicle categories present in COPERT 5 (Jensen, 2025). The latter source also provides information of the mileage split between urban, rural and highway driving. The respective average speeds come from The Danish Road Directorate (e.g. Winther & Ekman, 1998). Additional data for the moped fleet and motorcycle fleet disaggregation is given by The National Motorcycle Association (Markamp, 2013) and supplementary mo-

ped stock information is obtained from The Danish Bicycle Traders Association (Johnsen, 2018) and Prince (2021). For information on the historical vehicle stock and annual mileage, please refer to Nielsen et al. (2025).

In addition, data from a survey made by the Danish Road Directorate (Hansen, 2010) has given information of the total mileage driven by foreign cars, vans, coaches and trucks on Danish roads in 2009 and a follow-up survey in 2014 has given additional information. This mileage contribution has been added to the total mileage for Danish trucks on Danish roads, for trucks >16 tonnes of gross vehicle weight. The data has been further processed by DTU Transport; by using appropriate assumptions, the mileage have been back-casted to 1985 and projected to 2050.

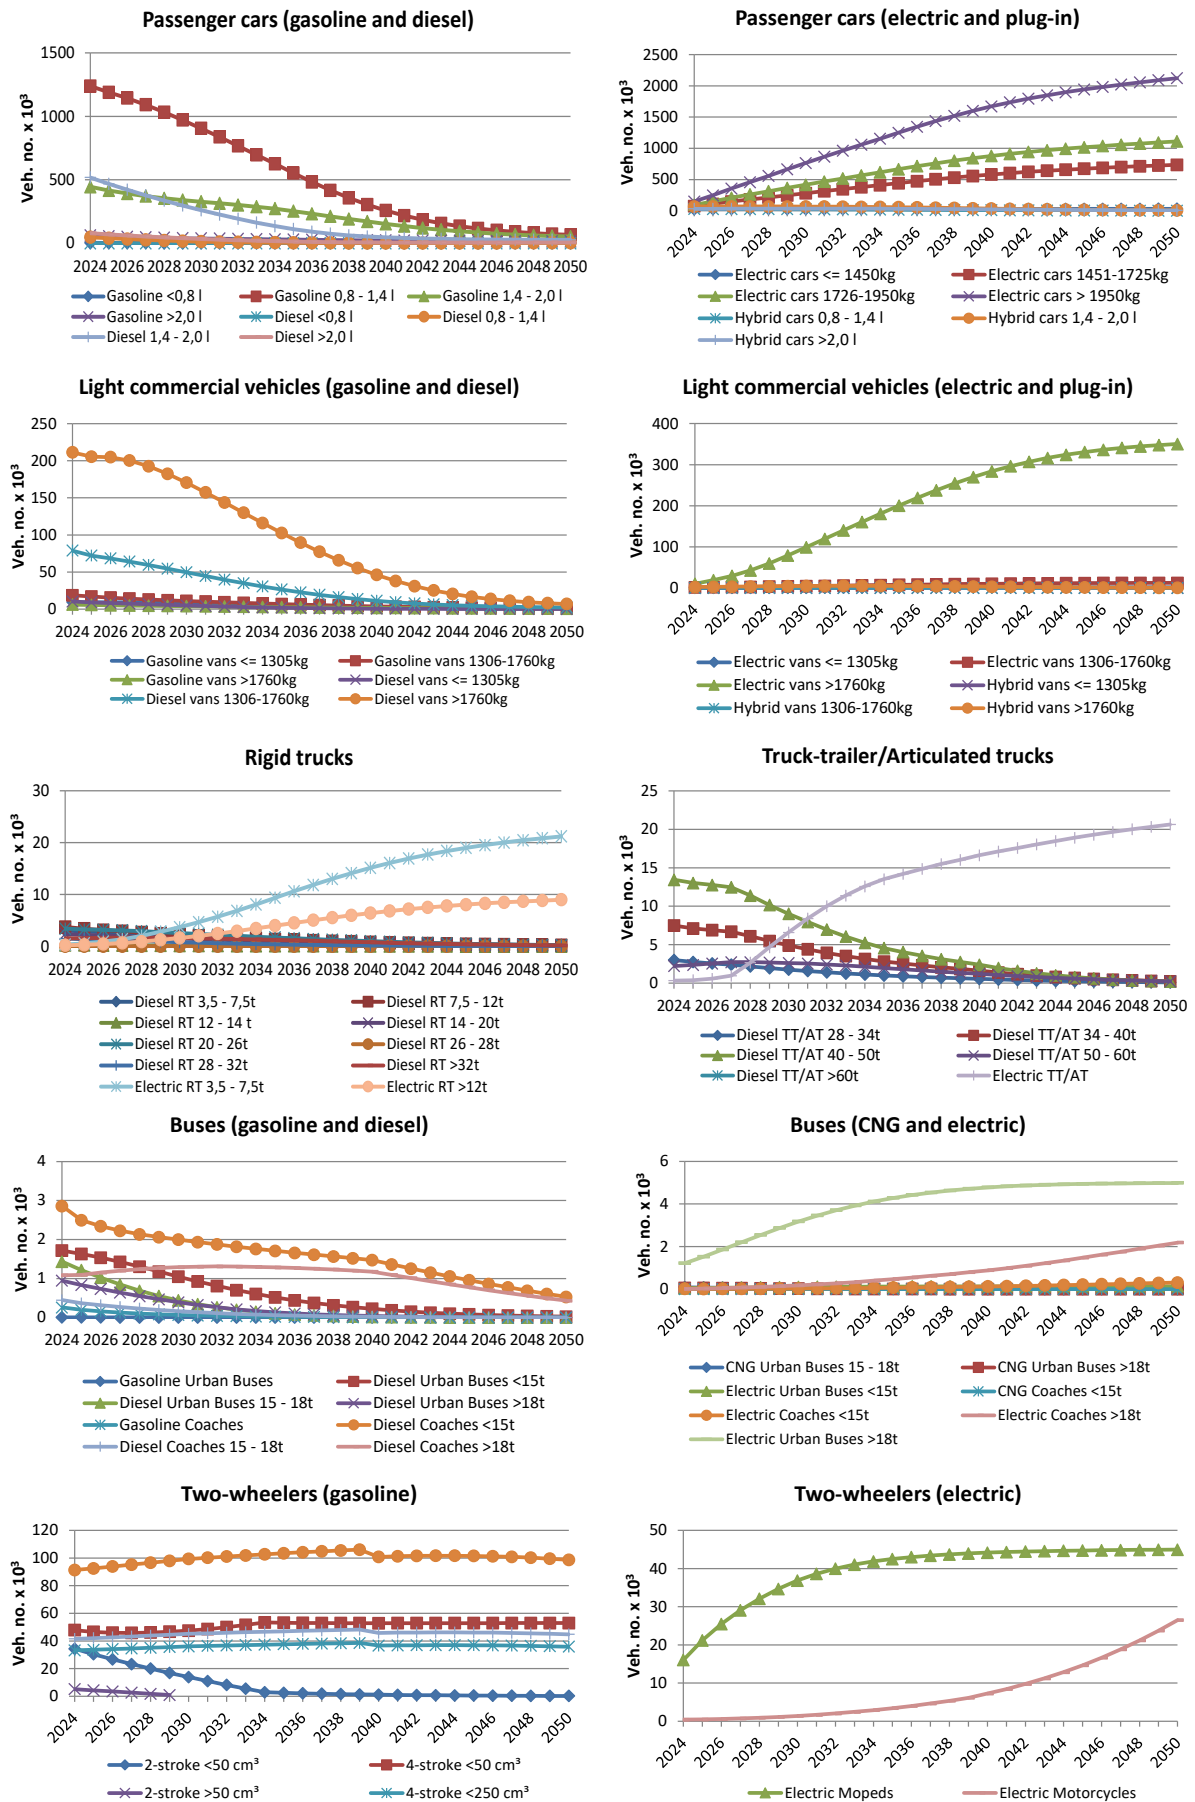


Figure 5.1 Number of vehicles in sub-classes from 2024-2050.

The vehicle numbers per sub-class are shown in Figure 5.1. The engine size differentiation is associated with some uncertainty.

The vehicle numbers are summed up in layers for each year (Figure 5.2) by using the correspondence between layers and first registration year:

$$(5.1) \quad N_{j,y} = \sum_{i=FYear(j)}^{LYear(j)} N_{i,y}$$

where N = number of vehicles, j = layer, y = year, i = first registration year.

Weighted annual mileages per layer are calculated as the sum of all mileage driven per first registration year divided with the total number of vehicles in the specific layer.

$$(5.2) \quad M_{j,y} = \frac{\sum_{i=FYear(j)}^{LYear(j)} N_{i,y} \cdot M_{i,y}}{\sum_{i=FYear(j)}^{LYear(j)} N_{i,y}}$$

The trends in vehicle numbers per EU layer are also shown in Figure 5.2 for the 2024-2050 periods. The latter figure clearly shows how vehicles complying with the gradually stricter EU emission levels (Euro 6/VI and Euro 7/VII) are introduced into the Danish motor fleet in the projection period.

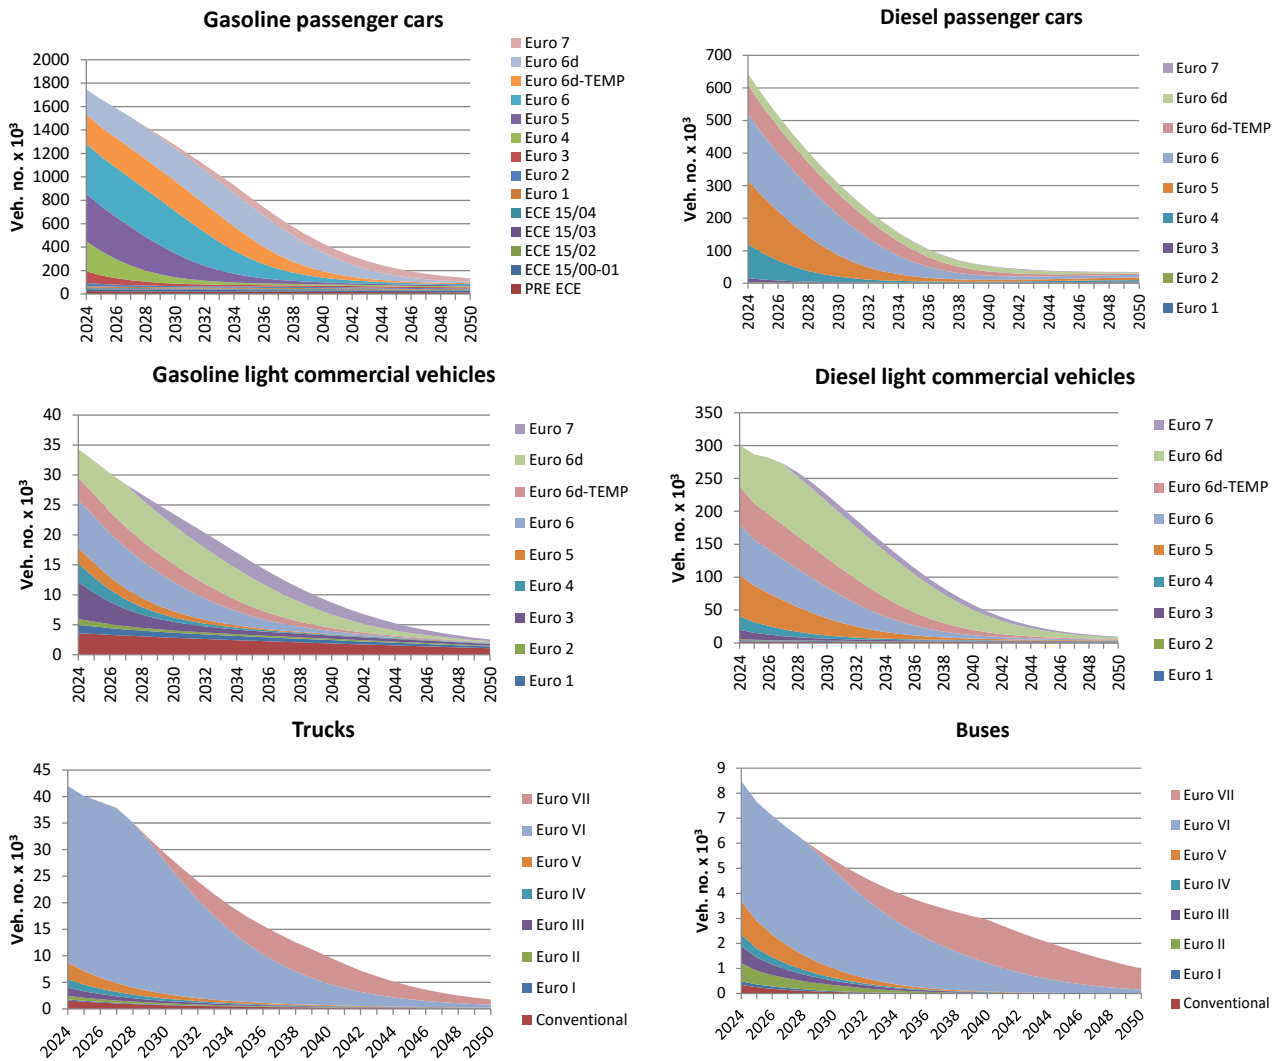


Figure 5.2 Layer distribution of vehicle numbers per vehicle type in 2023-2050.

5.1.2 Emission legislation

The EU 443/2009 regulation established new emission performance standards for new passenger cars as part of the Community's integrated approach to reduce CO₂ emissions from light-duty vehicles. Some key elements of the adopted text are as follows:

- **Limit value curve:** the fleet average to be achieved by all cars registered in the EU is 130 gram CO₂ per kilometre (g per km). A so-called limit value curve implies that heavier cars are allowed higher emissions than lighter cars while preserving the overall fleet average.
- **Further reduction:** a further reduction of 10 g CO₂ per km, or equivalent if technically necessary, will be delivered by other technological improvements and by an increased use of sustainable biofuels.
- **Phasing-in of requirements:** in 2012, 65 % of each manufacturer's newly registered cars must comply on average with the limit value curve set by the legislation. This will rise to 75 % in 2013, 80 % in 2014, and 100 % from 2015 onwards.
- **Lower penalty payments for small excess emissions until 2018:** if the average CO₂ emissions of a manufacturer's fleet exceed its limit value in any year from 2012, the manufacturer has to pay an excess emissions premium for each car registered. This premium amounts to €5 for the first g per km of exceedance, €15 for the second g per km, €25 for the third g per km, and

€95 for each subsequent g per km. From 2019, already the first g per km of exceedance will cost €95.

- **Long-term target:** a target of 95g CO₂ per km is specified for the year 2021.
- **Eco-innovations:** manufacturers can be granted a maximum of 7g per km of emission credits on average for their fleet if they equip vehicles with innovative technologies, based on independently verified data.

The EU 510/2011 regulation established new emission performance standards for new light commercial vehicles (vans). Some key elements of the regulation are as follows:

- **Target dates:** the EU fleet average of 175 g CO₂ per km will be phased in between 2014 and 2017. In 2014, an average of 70 % of each manufacturer's newly registered vans must comply with the limit value curve set by the legislation. This proportion will rise to 75 % in 2015, 80 % in 2016, and 100 % from 2017 onwards.
- **Limit value curve:** emissions limits are set according to the mass of vehicle, using a limit value curve. The curve is set in such a way that a fleet average of 175 grams of CO₂ per kilometre is achieved. A so-called limit value curve of 100 % implies that heavier vans are allowed higher emissions than lighter vans while preserving the overall fleet average. Only the fleet average is regulated, so manufacturers will still be able to make vehicles with emissions above the limit value curve provided these are balanced by other vehicles, which are below the curve.
- **Vehicles affected:** the vehicles affected by the legislation are vans, which account for around 12 % of the market for light-duty vehicles. This includes vehicles used to carry goods weighing up to 3.5 t (vans and car-derived vans, known as N1) and which weigh less than 2610 kg when empty.
- **Long-term target:** a target of 147 g CO₂ per km is specified for the year 2020.
- **Excess emissions premium for small excess emissions until 2018:** if the average CO₂ emissions of a manufacturer's fleet exceed its limit value in any year from 2014, the manufacturer has to pay an excess emissions premium for each van registered. This premium amounts to €5 for the first g per km of exceedance, €15 for the second g per km, €25 for the third g per km, and €95 for each subsequent g per km. From 2019, the first g per km of exceedance will cost €95. This value is equivalent to the premium for passenger cars.
- **Super-credits:** vehicles with extremely low emissions (below 50 g per km) will be given additional incentives whereby each low-emitting van will be counted as 3.5 vehicles in 2014 and 2015, 2.5 in 2016 and 1.5 vehicles in 2017.
- **Eco-innovations:** manufacturers can be granted a maximum of 7 g per km of emission credits on average for their fleet if they equip vehicles with innovative technologies, based on independently verified data.
- **Other flexibilities:** manufacturers may group together to form a pool and act jointly in meeting the specific emissions targets. Independent manufacturers who sell fewer than 22 000 vehicles per year can also apply to the Commission for an individual target instead.

On 17 April 2019, the European Parliament and the Council adopted Regulation (EU) 2019/631 setting CO₂ emission performance standards for new passenger cars and for new light commercial vehicles (vans) in the EU.

This Regulation started applying on 1 January 2020, replacing and repealing the former Regulations setting CO₂ emission standards for cars ((EC) 443/2009) and vans ((EU) 510/2011).

On 19 April 2023, the European Parliament and the Council amended the Regulation 2019/631 to strengthen the CO₂ emission performance standards for new passenger cars and vans, bringing them in line with the EU's ambition to reach climate neutrality by 2050. This amendment strengthened the emission targets applying from 2030 and set a 100 % emission reduction target for both cars and vans from 2035 onwards.

The following description of the amendment of the regulation (EU) 2019/631 is given on the EU Commission Climate Action web page (https://climate.ec.europa.eu/eu-action/transport/road-transport-reducing-co2-emissions-vehicles/co2-emission-performance-standards-cars-and-vans_en). The main elements of the amended regulation are:

Target levels

Below are the EU fleet-wide CO₂ emission targets set in the regulation:

2020 to 2024

Cars: 95 g CO₂/km
Vans: 147 g CO₂/km

These target levels refer to the NEDC emission test procedure.

2025 to 2034

The targets that will apply from 2025 onwards are based on the WLTP (World-wide harmonized Light vehicles Test Procedure) and were set out in Commission Implementing Decision (EU) 2023/1623:

Cars: 93.6 g CO₂/km (2025-2029) and 49.5 g CO₂/km (2030-2034)
Vans: 153.9 g CO₂/km (2025-2029) and 90.6 g CO₂/km (2030-2034)

From **2035 onwards**, the EU fleet-wide CO₂ emission target for both cars and vans is 0 g CO₂/km, corresponding to a 100 % reduction.

The **annual specific emission targets** of each manufacturer are based on these EU fleet-wide targets, taking into account the average mass of its registered new vehicles. Since 2021, those specific emission targets are based on the WLTP.

The manufacturer targets for the **years 2021-2024** are calculated in accordance with point 4 of Annex I (parts A and B) to Regulation (EU) 2019/631, using the values set out in Annex II to [Commission Implementing Decision \(EU\) 2022/2087](#).

The manufacturer targets **from 2025 onwards** are calculated in accordance with point 6 of Annex I (parts A and B) to Regulation (EU) 2019/631, using the values set out in Annex II to Commission Implementing Decision (EU) 2023/1623.

Incentive mechanism for zero- and low-emission vehicles (ZLEV):

From 2025 to 2029, a ZLEV **crediting system** will apply both for car and van manufacturers. The system will alleviate a manufacturer's specific emission target if its share of new ZLEV (vehicles with emissions between 0 and 50 g CO₂/km) registered in a given year exceeds the following benchmarks:

Cars: 25% ZLEV

Vans: 17% ZLEV

A one percentage point exceedance of the ZLEV benchmark will increase the manufacturer's CO₂ target (in g CO₂/km) by one percent. The alleviation of the emission target will be capped at maximum 5 % to safeguard the environmental integrity of the Regulation.

To calculate the ZLEV share in a manufacturer's fleet, an accounting rule give a greater weight to ZLEVs with lower CO₂ emissions. An additional multiplier may apply for cars registered in Member States with a low share and number of ZLEVs registered in 2017.

Penalties for excess emissions:

If the average CO₂ emissions of a manufacturer's fleet exceed its specific emission target in a given year, the manufacturer must pay – for each of its new vehicles registered in that year – an **excess emissions premium** of €95 per g/km of target exceedance.

Pooling:

Different manufacturers can act jointly to meet their emissions target. When forming a pool, manufacturers must respect the rules of competition law. Pooling between car and van manufacturers is not possible.

Exemptions and derogations:

Manufacturers responsible for fewer than 1000 new cars or fewer than 1000 new vans registered in the EU per year are **exempt** from meeting a specific emission target in the following year, unless they voluntarily apply for a derogation.

Manufacturers may apply for a **derogation** from their specific emission target with the following conditions:

A “small-volume” manufacturer (responsible for less than 10 000 new cars or less than 22 000 new vans registered per year) can propose its own derogation target, based on the criteria set in Article 10 of the regulation.

A “niche” car manufacturer (responsible for between 10 000 and 300 000 new cars registered per year) can apply for a derogation for the years until 2028, included. The derogation targets are calculated as set out in Article 10(4) of the Regulation and in point 5 of Part A of its Annex I. Feel free to access the values used to calculate the “niche” derogation target from 2025 onwards.

Eco-innovations:

To promote the development of new and advanced technologies reducing CO₂ emissions from vehicles, manufacturers may obtain emission credits for cars and vans which are equipped with innovative technologies (eco-innovations) whose full CO₂ savings are impossible to demonstrate during their type-approval.

The manufacturer must demonstrate these savings based on independently verified data. The maximum emission credits for these eco-innovations per manufacturer are 7 g CO₂/km per year until 2024, 6 g CO₂/km from 2025 to 2029, and 4 g CO₂/km from 2030 to 2034. As of 2025, the efficiency improvements for air conditioning systems will become eligible as eco-innovations.

In-service verification:

Manufacturers must ensure that the CO₂ emissions recorded in the certificates of conformity of their vehicles and the in-service CO₂ emissions of such vehicles correspond. Type-approval authorities must verify this correspondence in selected vehicles, as well as the presence of any strategies to artificially improve the vehicle's performance during type-approval tests.

In case deviations or artificial strategies are detected, type-approval authorities must report those to the Commission, who will take them into account when calculating the average specific emissions of a manufacturer. Authorities must also ensure the correction of the certificates of conformity and may take additional measures as set out in the Type Approval regulation.

Real-world emissions:

To assess the real-world representativeness of the CO₂ emissions and the fuel or energy consumption values determined during type-approval, as well as to prevent the growing of the gap between emissions tested in the laboratory and real-world emissions, the Commission is collecting real-world data from cars and vans using on-board fuel consumption monitoring (OBFCM) devices, starting with vehicles first registered in 2021.

On 14 February 2023, the European Commission tabled a legislative proposal to revise Regulation (EU) 2019/1242 setting CO₂ emission standards for new HDVs in the EU, see [https://www.europarl.europa.eu/thinktank/en/document/EPRS_BRI\(2023\)747880](https://www.europarl.europa.eu/thinktank/en/document/EPRS_BRI(2023)747880). The revision was approved by the European Parliament on 10 April 2024 and ratified by the Council of the European Union on 13 May 2024.

The revision expands the scope of the regulation to include urban buses, coaches, trailers and additional types of lorries. The average CO₂ emissions of trucks and coaches, compared with 2019 levels, would have to fall by 45 % from 2030, by 65 % from 2035, and by 90 % from 2040 onwards.

The revision introduced a 2035 100 % zero emissions target for urban buses, with an intermediate 90 % 2030 goal.

For Euro 1-6 passenger cars and vans, the chassis dynamometer test cycle used in the EU for emission approval is the NEDC (New European Driving Cycle), see e.g. www.dieselnr.com. The test cycle is also used for fuel consumption measurements. The NEDC cycle consists of two parts, the first part being a 4-time repetition (driving length: 4 km) of the ECE test cycle. The latter test cycle is the so-called urban driving cycle⁵ (average speed: 19 km per h). The second part of the test is the run-through of the EUDC (Extra Urban Driving Cycle) test driving segment, simulating the fuel consumption under rural and highway driving conditions. The driving length of EUDC is 7 km at

⁵ For Euro 3 and on, the emission approval test procedure was slightly changed. The 40 s engine warm up phase before start of the urban driving cycle was removed.

an average speed of 63 km per h. More information regarding the fuel measurement procedure can be found in the EU-directive 80/1268/EØF.

The NEDC test cycle is not adequately describing real world driving behaviour, and consequently, for diesel cars and vans, there is an increasing mismatch between the step wise lowered EU emission limits the vehicles comply with during the NEDC test cycle, and the more or less constant emissions from the same vehicles experienced during real world driving. In order to bridge this emission inconsistency gap, a new test procedure, the “World-Harmonized Light-Duty Vehicles Test Procedure” (WLTP), has been developed which simulates much more closely real-world driving behaviour. The WLTP test procedure gradually take effect from 2017.

For newer Euro 6 vehicles and Euro 7 vehicles emission measurements must also be made with portable emission measurement systems (PEMS) during real traffic driving conditions with random acceleration and deceleration patterns. During the new Real Driving Emission (RDE) test procedure in a temporary phase, the emissions of NO_x are not allowed to exceed the NEDC based Euro 6 emission limits by more than 110 % by 1 September 2017 for all new car models and by 1 September 2019 for all new cars (Euro 6d-TEMP). From 1 January 2020 in the final phase, the NO_x emission not-to-exceed levels are adjusted downwards to 50 % for all new car models and by 1 January 2021 for all new cars (Euro 6d). Implementation dates for vans are one year later.

In the road transport emission model, compromise dates for enter into service of the Euro 6d-TEMP technology are set to 1 September 2018 and 1 September 2019, for diesel cars and vans, respectively. For Euro 6d, the enter into service dates are 1 January 2021 and 1 January 2022 for cars and vans, respectively.

For NO_x, VOC (NMVOC + CH₄), CO and PM, the emissions from road transport vehicles must comply with the different EU directives listed in Table 5.3. For cars and vans, the emission directives distinguish between three vehicle classes according to vehicle reference mass⁶: passenger cars and light-duty trucks (< 1305 kg), light-duty trucks (1305-1760 kg) and light-duty trucks (> 1760 kg). The specific emission limits are shown in Nielsen et al. (2025).

For heavy-duty vehicles (trucks and buses), the emission limits are given in g per kWh and the measurements are carried out for engines in a test bench, using the ECE R-49, EU ESC (European Stationary Cycle) and ETC (European Transient Cycle) test cycles, depending on the Euro norm and exhaust gas after-treatment system installed. For Euro VI and Euro VII engines the WHSC (World Harmonized Stationary Cycle) and WHTC (World Harmonized Transient Cycle) test cycles are used. For a description of the test cycles, see e.g. www.dieselnet.com.

For Euro VII engines emissions measured during a Real Driving Emission (RDE) test procedure with random acceleration and deceleration patterns, must comply with specific emission limits given in EU directive 2024/1257.

⁶ Reference mass: net vehicle weight + mass of fuel and other liquids + 100 kg.

Table 5.3 Overview of the existing EU emission directives for road transport vehicles.

Vehicle category	Emission layer	EU directive	Type approval	First registration date
Passenger cars (gasoline)	PRE ECE	-	-	<1970-
	ECE 15/00-01	70/220 - 74/290	1972 ^a	1970 ^a
	ECE 15/02	77/102	1981 ^b	1979 ^b
	ECE 15/03	78/665	1982 ^c	1981 ^c
	ECE 15/04	83/351	1987 ^d	1986 ^d
Passenger cars (diesel)	Conventional	-	-	<1991-
Passenger cars	Euro 1	91/441	1.7.1992 ^e	1.1.1991 ^e
	Euro 2	94/12	1.1.1996	1.1.1997
	Euro 3	98/69	1.1.2000	1.1.2001
	Euro 4	98/69	1.1.2005	1.1.2006
	Euro 5	715/2007(692/2008)	1.9.2009	1.1.2011
	Euro 6	715/2007(692/2008)	1.9.2014	1.9.2015
	Euro 6d-TEMP	2016/646	1.9.2017	1.9.2018
	Euro 6d	2016/646	1.1.2020	1.1.2021
	Euro 7	2024/1257	29.11.2026	29.11.2027
LCV < 1305 kg	Conventional	-	-	<1995
	Euro 1	91/441	1.10.1994	1.1.1995
	Euro 2	94/12	1.1.1998	1.1.1999
	Euro 3	98/69	1.1.2001	1.1.2002
	Euro 4	98/69	1.1.2006	1.1.2007
	Euro 5	715/2007(692/2008)	1.9.2010	1.1.2012
	Euro 6	715/2007(692/2008)	1.9.2015	1.9.2016
	Euro 6d-TEMP	2016/646	1.9.2018	1.9.2019
	Euro 6d	2016/646	1.1.2021	1.1.2022
LCV 1305-1760 kg & > 1760 kg	Conventional	-	-	<1995
	Euro 1	93/59	1.10.1994	1.1.1995
	Euro 2	96/69	1.1.1998	1.1.1999
	Euro 3	98/69	1.1.2001	1.1.2002
	Euro 4	98/69	1.1.2006	1.1.2007
	Euro 5	715/2007	1.9.2010	1.1.2012
	Euro 6	715/2007	1.9.2015	1.9.2016
	Euro 6d-TEMP	2016/646	1.9.2018	1.9.2019
	Euro 6d	2016/646	1.1.2021	1.1.2022
Heavy duty vehicles	Euro 7	2024/1257	29.11.2026	29.11.2027
	Euro 0	88/77	1.10.1990	1.10.1990
	Euro I	91/542	1.10.1993	1.10.1993
	Euro II	91/542	1.10.1996	1.10.1996
	Euro III	1999/96	1.10.2000	1.10.2001
	Euro IV	1999/96	1.10.2005	1.10.2006
	Euro V	1999/96	1.10.2008	1.10.2009
	Euro VI	595/2009	1.1.2013	1.1.2014
	Euro VII	2024/1257	29.5.2028	29.5.2029
Mopeds	Conventional	-	-	-
	Euro I	97/24	2000	2000
	Euro II	2002/51	2004	2004
	Euro III	2002/51	2014 ^f	2014 ^f
	Euro IV	168/2013	2017	2017
	Euro V	168/2013	2021	2021
Motorcycles	Conventional	-	0	0
	Euro I	97/24	2000	2000
	Euro II	2002/51	2004	2004
	Euro III	2002/51	2007	2007
	Euro IV	168/2013	2017	2017
<i>Continued</i>				
	Euro V	168/2013	2021	2021

a,b,c,d: Expert judgement suggests that Danish vehicles enter into the traffic before EU directive first registration dates. The effective inventory starting years are a: 1970; b: 1979; c: 1981; d: 1986; e: The directive came into force in Denmark 1.10.1990.

5.1.3 Fuel consumption and emission factors

In practice, the emissions from vehicles in traffic are different from the legislation limit values and, therefore, the latter figures are not suited for total emission calculations. Besides difference in test versus real world driving behaviour, as discussed in the previous section, the emission limit values do not reflect the emission impact of cumulated mileage driven, and engine and exhaust after treatment maintenance levels for a vehicle fleet as such.

Therefore, to represent the Danish fleet and to support average national emission estimates, the selected emission factors must be derived from numerous emission measurements, using a broad range of real-world driving patterns and enough test vehicles. It is similarly important to have separate fuel consumption and emission data for cold-start emission calculations and gasoline evaporation (hydrocarbons).

The fuel consumption and emission factors used in DEMOS-Road come from the COPERT 5 model⁷, using trip speeds representative for urban, rural and highway driving. The factors can be seen in Nielsen et al. (2025). The scientific basis for COPERT 5 is fuel consumption figures and emission information from various European measurement programmes, transformed into trip speed dependent fuel consumption and emission factors for all vehicle categories and layers.

It should be noted that for PHEV (plug-in hybrid electric vehicles) cars and vans, the utility factor is set to 0.3, i.e. 30 % of total mileage is assumed to be battery driven, according to assumptions made by DEA (2024)⁸. The fuel consumption and emission factors for plug-in vehicles used in the Danish national emission inventories for road transport, and shown in the present report, only contain the part of fuel consumption and emissions related to the combustion of fossil fuel (gasoline) in the vehicles. The emissions related to the generation of the electricity used by battery electric vehicles and plug-in vehicles are included under stationary sources in the Danish emission inventories as prescribed by the UNFCCC reporting guidelines.

Adjustment for fuel efficient vehicles

For passenger cars, COPERT 5 includes measurement-based fuel consumption factors until Euro 4. A calculation function is provided for newer cars that one hand compensates for the trend towards more fuel-efficient vehicles being sold during the later years and on the other hand compensates for the increasing fuel gap between fuel consumption measured during vehicle type approval and real-world fuel consumption.

The COPERT calculation function and supporting data material basis is, however, not able to account for the fuel gaps between fuel consumption measured during vehicle type approval and real-world fuel consumption for vehicles after 2014, as monitored by e.g. the International Council on Clean Transportation (ICCT), Tietge et al. (2019).

⁷ For hydrogen fuel cell passenger cars and light commercial vehicles, hydrogen fuel cell and battery electric buses and trucks, and battery electric mopeds and motorcycles fuel consumption factor data are obtained from the HBEFA (Handbook of Emission Factors) model version 4.1 (e.g. Matzer et al., 2019).

⁸ The electric driven mileage shares for Danish urban, rural and highway driving conditions are derived by weighing in electric driven mileage shares for urban, rural and highway driving conditions obtained from HBEFA.

The baseline COPERT 5 fuel consumption factors for Euro 4, Euro 5 and Euro 6 passenger cars are adjusted in the following way.

In the Danish fleet and mileage database kept by DTU Transport, the type approval fuel efficiency value based on the NEDC driving cycle (TA_{NEDC}) is registered for each single car. In the fleet and mileage database, type approval fuel efficiency values based on the WLTP driving cycle is converted into TA_{NEDC} values by using conversion factors from NEDC to WLTP established by JRC (2017).

Further, DTU Transport calculates a modified fuel efficiency value (FC_{inuse}) with the calculation function provided by COPERT 5 that better reflects the fuel consumption in real (“inuse”) traffic conditions.

The FC_{inuse} function uses TA_{NEDC} , vehicle weight, engine size and regression coefficients by first registration year, as input parameters (EMEP/EEA, 2024). For each new registration year, i , fuel type, f , and engine size, k , number based average values of TA_{NEDC} and FC_{inuse} are summed up and referred to as $\overline{TA_{NEDC}}(i, f, k)$ and $\overline{TA_{inuse}}(i, f, k)$. For vehicle new registrations after 2014, regression coefficients are used for 2014.

The FC_{inuse} function has been developed from a vehicle database consisting of new registered cars from 2006-2014 (Tietge et al., 2017). Hence, as previously mentioned, the FC_{inuse} function is not able to account for the fuel gaps after 2014, between type approval and real-world fuel consumption as monitored by ICCT (Tietge et al., 2019).

To obtain $\overline{FC_{inuse}}(i, f, k)$ values for vehicle new registrations 2015-2024, the $\overline{FC_{inuse}}(i, f, k)$ values for 2014 are adjusted for the years 2015-2024⁹ with an index function (indexed from 2014), $C_{ICCT}(i, f)$, based on the reported ICCT fuel gap figures by fuel type for the new registration years 2014-2024.

Subsequently these $\overline{FC_{inuse}}(i, f, k)$ values are aggregated by mileage into layer specific values for each inventory year ($\overline{FC_{inuse}}(layer)$).

At the same time, COPERT provides fuel consumption factors for Euro 4 vehicles for a specific driving pattern composition¹⁰ that better describes real world driving for these specific vehicles. The factors build on the actual fuel measurements for the Euro 4 sample of COPERT vehicles ($FC_{COPERT, sample}$), used in the development of the Euro 4 emission factors in the COPERT model.

In a final step the ratio between the layer specific fuel factors for the Danish fleet ($\overline{FC_{inuse}}(layer)$) and the COPERT Euro 4 vehicles ($FC_{COPERT, sample}$) are used to scale the trip speed dependent COPERT 5 fuel consumption factors for Euro 4 layers onwards.

For years beyond 2024 annual fuel efficiency, improvement rates are used for new cars depending on fuel type as suggested by DEA (2025).

⁹ The ICCT monitoring report includes new cars up to 2017. For new cars from 2018-2024, fuel gap figures are used for cars from 2017.

¹⁰ The factors are derived from the Common Artemis Driving Cycle (CADC), with a 1/3 weight for each of the urban, rural and highway parts of CADC.

For vans, trucks, urban buses and coaches, annual fuel efficiency improvement rates are used for new vehicles depending on fuel type as suggested by DEA (2025).

5.1.4 Fuel consumption and emission calculations

The fuel consumption and emissions are calculated for operationally hot engines and for engines during cold start. A final fuel balance adjustment is made to account for the statistical fuel sold according to Danish energy statistics/projections.

The calculation procedure for hot engines is to combine basis fuel consumption and emission factors, number of vehicles and annual mileage numbers and mileage road type shares. For additional description of the hot and cold-start calculations and fuel balance approach, please refer to Nielsen et al. (2025).

5.2 Other mobile sources

The emission inventories for other mobile sources are divided into several sub-sectors: Civil aviation, national navigation, national fishing, railways, military, and non-road mobile machinery in agriculture, forestry, industry, commercial/institutional and residential.

The emission calculations are made for each sub-sector in the DEMOS model using the detailed method as described in the EMEP/EEA air pollutant emission inventory guidebook (EMEP/EEA, 2025)¹¹.

5.2.1 Activity data

Air traffic

For air traffic, DEMOS-Aviation uses air traffic statistics for the latest historical year in combination with flight specific emission data to determine the share of fuel used for LTO and cruise by domestic and international flights and to derive the corresponding emission factors. The LTO and cruise fuel shares are then used to make an LTO/cruise split of the fuel consumption projections for domestic and international aviation from DECO26 due to lack of a projection of air traffic movements.

In more details the historical activity data used in the DEMOS-Aviation consists of records per flight (city-pairs) provided by the Danish Civil Aviation and Railway Authority. Each flight record contains e.g. ICAO (International Civil Aviation Organization) codes for aircraft type, origin and destination airport, maximum take-off mass (MTOM), flight call sign and aircraft registration number.

In DEMOS-Aviation, each aircraft type is paired with a representative aircraft type, for which fuel consumption and emission data exist in the EMEP/EEA databank. As a basis, the type relation table is taken from the Eurocontrol AEM model, which is the primary source for the present EMEP/EEA fuel consumption and emission data. Supplementary aircraft types are assigned to

¹¹ For military and other sea vessels than ferries, the simple fuel-based method is used.

representative aircraft types based on the type relation table already established in the previous version of DEMOS-Aviation (e.g. Winther, 2024).

Non road mobile machinery

Non road mobile machinery is used in agriculture, forestry and industry, for household/gardening purposes and inland waterways (recreational craft). The specific machinery types comprised in the DEMOS-NRMM are shown in Table 5.4.

Table 5.4 Machinery types comprised in the Danish non road inventory.

Sector	Diesel	Gasoline/LPG
Agriculture	Tractors, harvesters, machine pool, other	ATV's (All Terrain Vehicles), other
Forestry	Silvicultural tractors, harvesters, forwarders, - chippers	
Industry	Construction machinery, forklifts, building and construction, other	Forklifts (LPG), building and construction, other
Residential and Commercial/institutional	Port and airport ground service equipment	Riders, lawn mowers, chain saws, cultivators, shrub clearers, hedge cutters, trimmers, other, port/airport handling equipment (commercial/institutional)

Please refer to the reports by Winther et al. (2006) and Winther (2023) for detailed information of the number of different types of machines, their load factors, engine sizes and annual working hours.

National sea transport

For national sea transport, the energy projections from DECO26 for the sectors “National sea transport” and “Greenland/Faroe Islands maritime” are used as activity data input for the subsequent emission calculations in DEMOS-Navigation. The projected energy totals for national sea transport are disaggregated into subcategories based on fleet activity estimates for ferries, sailing activities between Denmark and Greenland/Faroe Islands, and other national sea transport (Winther, 2024; Nielsen et al., 2025).

Table 5.5 lists the most important domestic ferry routes in Denmark in 2024. The complete list of ferries is shown in e.g. Winther (2024). For the ferry routes the following detailed traffic and technical data have been gathered: ferry name, year of service, engine size (MCR), engine type, fuel type, average load factor, auxiliary engine size and sailing time (single trip). Please refer to e.g. Winther (2024) for more details regarding traffic and technical data.

Table 5.5 Ferry routes comprised in the Danish inventory.

Ferry service	Service period
Esbjerg-Torshavn	1990-1995, 2009+
Hanstholm-Torshavn	1991-1992, 1999+
Hou-Sælvig	1990+
Frederikshavn-Læsø	1990+
Kalundborg-Samsø	1990+
Køge-Rønne	2004+
Sjællands Odde-Ebeltoft	1990+
Sjællands Odde-Århus	1999+
Svendborg-Ærøskøbing	1990+
Tårs-Spødsbjerg	1990+

Fisheries

For fishing vessels, the activity data consist of projected total energy use for fishing activities in DECO26, and electronic log data for the latest historical year 2024 provided by Aarhus University for each fishing trip made by Danish registered fishing vessels.

The log data register the following: Vessel registration number, build year, type, overall length (OAL), brutto tonnes (BT), total installed engine power (kW) and hours at sea. Please refer to Winther (2024) for more details regarding log register data.

Railways

The activity data for railways used in the DEMOS-Rail model consists of the projected total energy use for Danish railways activities in DECO26, historical train km statistics per train Litra type provided by Danish State Railways and train km statistics for private railway lines provided by Danish Civil Aviation and Railway Authority.

For several private railway companies, the following technical and operational data has been collected for each railway line operated by the companies: Train litra type, litra new sales year, Euro emission level, fuel type, fuel consumption factors, number of seats/standing rooms, and percentage distribution of annual litra km driven per litra type. For railway lines not able to provide data, supplementary data has been gathered from relevant web pages.

Military

The activity data for military activities consists of fuel consumption information from DECO26.

International navigation

For international sea transport, the activity data used in DEMOS-Navigation is the fuel sold in Danish ports for vessels with a foreign destination, as defined in the IPCC guidelines. The fuel consumption activity data is taken from DECO26.

5.2.2 Emission legislation

For other modes of transport and non-road machinery, the engines must comply with the emission legislation limits agreed by the EU and different UN organisations in terms of NO_x, CO, VOC and TSP emissions and fuel sulphur content. In terms of greenhouse gases, the emission legislation requirements for VOC impact the emissions of CH₄, the latter emission component forming a part of total VOC. For ships, legislative limits for specific fuel consumption have been internationally agreed in order to reduce the emissions of CO₂.

For non-road working machinery and equipment, recreational craft and railway locomotives/motor cars, the emission directives list specific emission limit values (g per kWh) for CO, VOC, NO_x (or VOC + NO_x) and TSP, depending on engine size (kW for diesel, ccm for gasoline) and date of implementation (referring to engine market date).

For diesel, the directives 97/68 and 2004/26 (Table 5.6) relate to Stage I-IV non-road machinery other than agricultural and forestry tractors and the directives have different implementation dates for machinery operating under transient and constant loads. The latter directive also comprises emission limits for Stage IIIA and IIIB railways machinery (Table 5.10). For Stage I-IV tractors the relevant directives are 2000/25 and 2005/13 (Table 5.6).

For emission approval of the EU Stage I, II and IIIA engine technologies, emissions (and fuel consumption) measurements are made using the steady state test cycle ISO 8178 C1, referred to as the Non-Road Steady Cycle (NRSC), see

e.g. www.dieselnet.com. In addition to the NRSC test, the newer Stage IIIB and IV (and optionally Stage IIIA) engine technologies are tested under more realistic operational conditions using the new Non-Road Transient Cycle (NRTC).

For gasoline, the directive 2002/88 distinguishes between Stage I and II hand-held (SH) and not hand-held (NS) types of machinery (Table 5.7). Emissions are tested using one of the specific constant load ISO 8178 test cycles (D2, G1, G2, G3) depending on the type of machinery.

For Stage V machinery, EU directive 2016/1628 relates to non-road machinery other than agricultural tractors and railways machinery (Table 5.6) and non-road gasoline machinery (Table 5.7). EU directive 167/2013 relates to Stage V agricultural and forestry tractors (Table 5.6).

Table 5.6 Overview of EU emission directives and emission limit values relevant for diesel fuelled non-road mobile machinery other than agricultural and forestry tractors and for agricultural and forestry tractors.

Other than agricultural and forestry tractors and for agricultural and forestry tractors.											
Stage	Engine size	CO	VOC	NO _x	VOC+NO _x PM		Other machinery than agricultural and forestry tractors Implement. date			Agricultural and forestry tractors Implement.	
	[kW]						EU Directive	Transient	Constant	EU Directive	Date
Stage I											
A	130<=P<560	5	1.3	9.2	-	0.54	97/68	1/1 1999	-	2000/25	1/7 2001
B	75<=P<130	5	1.3	9.2	-	0.7		1/1 1999	-		1/7 2001
C	37<=P<75	6.5	1.3	9.2	-	0.85		1/4 1999	-		1/7 2001
Stage II											
E	130<=P<560	3.5	1	6	-	0.2	97/68	1/1 2002	1/1 2007	2000/25	1/7 2002
F	75<=P<130	5	1	6	-	0.3		1/1 2003	1/1 2007		1/7 2003
G	37<=P<75	5	1.3	7	-	0.4		1/1 2004	1/1 2007		1/1 2004
D	18<=P<37	5.5	1.5	8	-	0.8		1/1 2001	1/1 2007		1/1 2002
Stage IIIA											
H	130<=P<560	3.5	-	-	4	0.2	2004/26	1/1 2006	1/1 2011	2005/13	1/1 2006
I	75<=P<130	5	-	-	4	0.3		1/1 2007	1/1 2011		1/1 2007
J	37<=P<75	5	-	-	4.7	0.4		1/1 2008	1/1 2012		1/1 2008
K	19<=P<37	5.5	-	-	7.5	0.6		1/1 2007	1/1 2011		1/1 2007
Stage IIIB											
L	130<=P<560	3.5	0.19	2	-	0.025	2004/26	1/1 2011	-	2005/13	1/1 2011
M	75<=P<130	5	0.19	3.3	-	0.025		1/1 2012	-		1/1 2012
N	56<=P<75	5	0.19	3.3	-	0.025		1/1 2012	-		1/1 2012
P	37<=P<56	5	-	-	4.7	0.025		1/1 2013	-		1/1 2013
Stage IV											
Q	130<=P<560	3.5	0.19	0.4	-	0.025	2004/26	1/1 2014	1/1 2014	2005/13	1/1 2014
R	56<=P<130	5	0.19	0.4	-	0.025		1/10 2014	1/10 2014		1/10 2014
Stage V ^A											
NRE-v/c-7 P>560		3.5	0.19	3.5		0.045	2016/1628		2019	167/2013 ^B	2019
NRE-v/c-6 130≤P≤560		3.5	0.19	0.4		0.015			2019		2019
NRE-v/c-5 56≤P<130		5.0	0.19	0.4		0.015			2020		2020
NRE-v/c-4 37≤P<56		5.0			4.7	0.015			2019		2019
NRE-v/c-3 19≤P<37		5.0			4.7	0.015			2019		2019
NRE-v/c-2 8≤P<19		6.6			7.5	0.4			2019		2019
NRE-v/c-1 P<8		8.0			7.5	0.4			2019		2019
Generators P>560		3.5	0.19	0.67		0.035			2019		2019

A = For selected machinery types, Stage V includes emission limit values for particle number.

B = Article 63 in 2016/1628 revise Article 19 in 167/2013 to include Stage V limits as described in 2016/1628.

Table 5.7 Overview of the EU emission directives and emission limit values relevant for gasoline fuelled non-road machinery.

	Category	Engine size [ccm]	CO [g pr kWh]	HC [g pr kWh]	NO _x [g pr kWh]	HC+NO _x [g pr kWh]	Implement. date
EU Directive 2002/88	Stage I						
Handheld	SH1	S<20	805	295	5.36	-	1/2 2005
	SH2	20≤S<50	805	241	5.36	-	1/2 2005
	SH3	50≤S	603	161	5.36	-	1/2 2005
Not handheld	SN3	100≤S<225	519	-	-	16.1	1/2 2005
	SN4	225≤S	519	-	-	13.4	1/2 2005
	Stage II						
Handheld	SH1	S<20	805	-	-	50	1/2 2008
	SH2	20≤S<50	805	-	-	50	1/2 2008
	SH3	50≤S	603	-	-	72	1/2 2009
Not handheld	SN1	S<66	610	-	-	50	1/2 2005
	SN2	66≤S<100	610	-	-	40	1/2 2005
	SN3	100≤S<225	610	-	-	16.1	1/2 2008
	SN4	225≤S	610	-	-	12.1	1/2 2007
EU Directive 2016/1628	Stage V						
Handheld (<19 kW)	NRSh-v-1a	S<50	805	-	-	50	2019
	NRSh-v-1b	50≤S	805	-	-	72	2019
Not handheld (P<19 kW)	NRS-vr/vi-1a	80≤S<225	610	-	-	10	2019
	NRS-vr/vi-1b	S≥225	610	-	-	8	2019
Not handheld (19≤P<30 kW)	NRS-v-2a	S≤1000	610	-	-	8	2019
	NRS-v-2b	S>1000	4.40*	-	-	2.70*	2019
Not handheld (30≤P<56 kW)	NRS-v-3	any	4.40*	-	-	2.70*	2019

* Or any combination of values satisfying the equation $(\text{HC}+\text{NO}_x) \times \text{CO}^{0.784} \leq 8.57$ and the conditions $\text{CO} \leq 20.6 \text{ g/kWh}$ and $(\text{HC}+\text{NO}_x) \leq 2.7 \text{ g/kWh}$.

For recreational craft, Directive 2003/44 comprises the Stage 1 emission legislation limits for diesel engines, and for 2-stroke and 4-stroke gasoline engines, respectively. The CO and VOC emission limits depend on engine size (kW) and the inserted parameters presented in the calculation formulas in Table 5.8. For NO_x, a constant limit value is given for each of the three engine types. For TSP, the constant emission limit regards diesel engines only.

In Table 5.9, the Stage II emission limits are shown for recreational craft. CO and HC+NO_x limits are provided for gasoline engines depending on the rated engine power and the engine type (stern-drive vs. outboard) while CO, HC+NO_x, and particulate emission limits are defined for Compression Ignition (CI) engines depending on the rated engine power and the swept volume.

Table 5.8 Overview of the EU emission directive 2003/44 for recreational craft.

Engine type	Impl. date	CO=A+B/P ⁿ			HC=A+B/P ⁿ			NO _x	TSP
		A	B	n	A	B	n		
2-stroke gasoline	1/1 2007	150.0	600.0	1.0	30.0	100.0	0.75	10.0	-
4-stroke gasoline	1/1 2006	150.0	600.0	1.0	6.0	50.0	0.75	15.0	-
Diesel	1/1 2006	5.0	0.0	0	1.5	2.0	0.5	9.8	1.0

Table 5.9 Overview of the EU emission directive 2013/53 for recreational craft.

Diesel engines					
Swept Volume, SV	Rated Engine Power, P_N	Impl. date	CO	HC + NO _x	PM
l/cyl.	kW		g/kWh	g/kWh	g/kWh
SV < 0.9	$P_N < 37$				
	$37 \leq P_N < 75$ (*)	18/1 2017	5	4.7	0.30
	$75 \leq P_N < 3\,700$	18/1 2017	5	5.8	0.15
0.9 ≤ SV < 1.2	$P_N < 3\,700$	18/1 2017	5	5.8	0.14
1.2 ≤ SV < 2.5		18/1 2017	5	5.8	0.12
2.5 ≤ SV < 3.5		18/1 2017	5	5.8	0.12
3.5 ≤ SV < 7.0		18/1 2017	5	5.8	0.11
Gasoline engines					
Engine type	Rated Engine Power, P_N		CO	HC + NO _x	PM
	kW		g/kWh	g/kWh	g/kWh
Stern-drive and inboard engines	$P_N \leq 373$	18/1 2017	75	5	-
	$373 \leq P_N \leq 485$	18/1 2017	350	16	-
	$P_N > 485$	18/1 2017	350	22	-
Outboard engines and PWC engines (**)	$P_N \leq 4.3$	18/1 2017	$500 - (5.0 \times P_N)$	$15.7 + (50/P_N)^{0.9}$	-
	$4.3 \leq P_N \leq 40$	18/1 2017	$500 - (5.0 \times P_N)$	$15.7 + (50/P_N)^{0.9}$	-
	$P_N > 40$	18/1 2017	300		-

(*) Alternatively, this engine segment shall not exceed a PM limit of 0.2 g/kWh and a combined HC + NO_x limit of 5.8 g/kWh.

(**) Small and medium-size manufacturers making outboard engines ≤ 15 kW have until 18/1 2020 to comply.

Table 5.10 Overview of the EU emission directive 2004/26 for railway locomotives and motor cars¹².

			CO	HC	NO _x	HC+NO _x	PM	
EU directive Engine size [kW]			g/kWh					Impl. date
Locomotives 2004/26	Stage IIIA							
	130 ≤ P < 560	RL A	3.5	-	-	4	0.2	1/1 2007
	560 < P	RH A	3.5	0.5	6	-	0.2	1/1 2009
	2000 ≤ P and piston displacement ≥ 5 l/cyl.	RH A	3.5	0.4	7.4	-	0.2	1/1 2009
	2004/26	Stage IIIB	RB	3.5	-	-	4 0.025	1/1 2012
2016/1628	Stage V							
	0 < P	RLL-v/c-1	3.5	-	-	4 0.025		2021
Motor cars 2004/26	Stage IIIA							
	130 < P	RC A	3.5	-	-	4	0.2	1/1 2006
	2004/26	Stage IIIB						
	130 < P	RC B	3.5	0.19	2	-	0.025	1/1 2012
	2016/1628	Stage V						
	0 < P	RLR-v/c-1	3.5	0.19	2	-	0.015	2021

Aircraft engine emissions of NO_x, CO, VOC and smoke are regulated by ICAO (International Civil Aviation Organization). The engine emission certification standards are contained in Annex 16 – Environmental Protection, Volume II – Aircraft Engine Emissions to the Convention on International Civil Aviation (ICAO Annex 16, 2008, plus amendments). The emission standards relate to the total emissions (in grams) from the so-called LTO (Landing and Take

¹² Rail cars: Self-propelled on-track vehicles specifically designed to carry goods and/or passengers.

Locomotives: Self-propelled pieces of on-track equipment designed for moving or propelling cars that are designed to carry freight, passengers and other equipment, but which themselves are not designed or intended to carry freight, passengers (other than those operating the locomotive) or other equipment.

Off) cycle divided by the rated engine thrust (kN). The ICAO LTO cycle contains the idealised aircraft movements below 3000 ft (915 m) during approach, landing, airport taxiing, take off and climb out.

For smoke all aircraft engines manufactured from 1 January 1983 must meet the emission limits agreed by ICAO. For NO_x , CO, VOC the emission legislation is relevant for aircraft engines with a rated engine thrust larger than 26.7 kN. In the case of CO and VOC, the ICAO regulations apply for engines manufactured from 1 January 1983.

For NO_x the increasingly strengthened emission regulations fall in five categories depending on date of manufacture of the first individual production model and production date of the individual engine. The emission limits are further grouped into engine pressure ratio intervals and levels of rated engine thrust.

The regulations published by ICAO are given in the form of the total quantity of pollutants (D_p) emitted in the LTO cycle divided by the maximum sea level thrust (F_{oo}) and plotted against engine pressure ratio at maximum sea level thrust.

A further description of the technical definitions in relation to engine certification, the emission limit values for NO_x , CO, HC and smoke as well as actual engine exhaust emission measurement data can be found in the ICAO Engine Exhaust Emission Database. The latter database is accessible from “<http://www.easa.europa.eu>” hosted by the European Aviation Safety Agency (EASA).

On 8 February 2016, at the tenth meeting of the International Civil Aviation Organization (ICAO) Committee for Environmental Protection (CAEP) a performance standard was agreed for new aircraft that will mandate improvements in fuel efficiency and reductions in CO_2 emissions. The standards will on average require a 4 % reduction in the cruise fuel consumption of new aircraft starting in 2028 compared to 2015 deliveries, with the actual reductions ranging from 0 to 11 %, depending on the maximum takeoff mass (MTOM) of the aircraft (ICCT, 2017).

The CO_2 certification standards are contained in a new Volume III - CO_2 Certification Requirement - to Annex 16 of the Convention on civil aviation (ICAO, 2017).

Embedded applicability dates are:

- **Subsonic jet aeroplanes**, including their derived versions, of greater than 5700 kg maximum take-off mass for which the application for a type certificate was submitted on or after 1 January 2020, except for those aeroplanes of less than or equal to 60 000 kg maximum take-off mass with a maximum passenger seating capacity of 19 seats or less.
- **Subsonic jet aeroplanes**, including their derived versions, of greater than 5700 kg and less than or equal to 60 000 kg maximum take-off mass with a maximum passenger seating capacity of 19 seats or less, for which the application for a type certificate was submitted on or after 1 January 2023.
- **All propeller-driven aeroplanes**, including their derived versions, of greater than 8618 kg maximum take-off mass, for which the application for a type certificate was submitted on or after 1 January 2020.

- **Derived versions of non-CO₂-certified subsonic jet aeroplanes** of greater than 5700 kg maximum certificated take-off mass for which the application for certification of the change in type design is submitted on or after 1 January 2023.
- **Derived versions of non-CO₂ certified propeller-driven aeroplanes** of greater than 8618 kg maximum certificated take-off mass for which the application for certification of the change in type design is submitted on or after 1 January 2023.
- **Individual non-CO₂-certified subsonic jet aeroplanes** of greater than 5700 kg maximum certificated take-off mass for which a certificate of airworthiness is first issued on or after 1 January 2028; and
- **Individual non-CO₂-certified propeller-driven aeroplanes** of greater than 8618 kg maximum certificated take-off mass for which a certificate of airworthiness is first issued on or after 1 January 2028.

Marpol 73/78 Annex VI agreed by IMO (International Maritime Organisation) concerns the control of NO_x emissions (Regulation 13 plus amendments) and SO_x and particulate emissions (Regulation 14 plus amendments) from ships (DNV, 2009). The so-called Energy Efficiency Design Index (EEDI) fuel efficiency regulations for new built ships were included in Chapter 4 of Annex VI in the Marpol convention for the purpose of controlling the CO₂ emissions from new built ships larger than 400 GT (Lloyd's Register, 2012).

EEDI is a design index value that expresses how much CO₂ is produced per work done (g CO₂/tonnes/nautical mile). At present, the IMO EEDI scheme comprises the following ship types; bulk carriers, gas carriers, tankers, container ships, general cargo ships, refrigerated and combination cargo carriers.

The EEDI percentage reductions that need to be achieved for new built ships relative to existing ships, are shown in Table 5.11 stratified according to ship type and dead weight tonnes (DWT) in the temporal phases (new built year in brackets); 0 (2013-14), 1 (2015-19), 2 (2020-24) and 3 (2025+).

Table 5.11 EEDI percentage reductions for new built ships relative to existing ships.

Ship type	Size	Phase 0	Phase 1	Phase 2	Phase 3
		1/1-2013 to 31/12-2014	1/1-2015 to 31/12-2019	1/1 2020 to 31/12-2024	1/1-2025 onwards
Bulk carrier	20 000 DWT and above	0	10	20	30
	10 000 – 20 000 DWT	n/a	0 -10*	0-20*	0-30*
Gas carrier	10 000 DWT and above	0	10	20	30
	2 000 – 10 000 DWT	n/a	0-10*	0-20*	0-30*
Tanker	20 000 DWT and above	0	10	20	30
	4 000 – 20 000 DWT	n/a	0-10*	0-20*	0-30*
Container ship	15 000 DWT and above	0	10	20	30
	10 000 – 15 000 DWT	n/a	0-10*	0-20*	0-30*
General cargo ship	15 000 DWT and above	0	10	15	30
	3 000 – 15 000 DWT	n/a	0-10*	0-15*	0-30*
Refrigerated cargo carrier	5 000 DWT and above	0	10	15	30
	3,000 – 5 000 DWT	n/a	0-10*	0-15*	0-30*
Combination carrier	20 000 DWT and above	0	10	20	30
	4 000 – 20 000 DWT	n/a	0-10*	0-20*	0-30*

It is envisaged that also ro-ro (roll on – roll off) cargo, ro-ro passenger and cruise passenger ships will be included in the EEDI scheme soon.

5.2.3 Emission factors

The CO₂ emission factors for other fuels than diesel, LNG, LPG and GTL are country-specific and come from Fenhann and Kilde (1994).

For diesel, the CO₂ emission factor is taken from IPCC (2006). For LNG, the CO₂ emission factor is estimated by the Danish gas transmission company, Energinet.dk, based on gas analysis data (Energinet.dk, 2022). For LPG, the emission factor source is EMEP/EEA (2025).

A country-specific emission factor for diesel used in road transportation is not available from Danish refineries, instead, the diesel EF for stationary combustion is used, which is from EU ETS. The average CO₂ EF of diesel burned in stationary sources during 2008-2016 is 74.1 kg/GJ, identical EF to the IPCC default data.

The N₂O emission factors are taken from the EMEP/EEA guidebook; EMEP/EEA (2025) for road transport and non-road mobile machinery, and IPCC (2006) for national sea transport and fisheries as well as aviation.

In the case of military ground equipment, due to lack of fleet/activity and emission data, aggregated CH₄ emission factors for gasoline and diesel are derived from total road traffic emission results. For piston engine aircraft using aviation gasoline, the CH₄ emission factors are derived from VOC factors from EMEP/EEA (2025) and a NMVOC/CH₄ split, based on the NMVOC/CH₄ split for conventional gasoline engines used in Danish road transport.

For railways, VOC emission factors are derived from specific Danish VOC measurements from the Danish State Railways (Mølgård, 2020). For private railway lines, VOC emission factors are estimated for the different train type technologies using diesel or GTL. The CH₄ emission factors for railways are derived from the VOC emission factors using a NMVOC/CH₄ split, based on expert judgement.

For agriculture, forestry, industry, household gardening and recreational craft, the VOC emission factors are derived from various European measurement programmes; see IFEU (2004, 2009, 2020), Notter and Schmied (2015) and Winther (2023). The NMVOC/CH₄ split is taken from IFEU (2009).

For national sea transport and fisheries, the VOC emission factors come from the Danish TEMA2015 emission model (Ministry of Transport, 2015).

Specifically for the ferries used by Mols Linjen, VOC emission factors are provided by Kristensen (2008), originating from engine measurements (Hansen et al., 2004; Wismann, 1999; PHP, 1996). Complimentary VOC emission factor data for new ferries used by Mols Linjen is provided by Kristensen (2013) and engine load specific VOC emission data is provided by Nielsen (2022).

For the LNG fueled ferry in service on the Hou-Sælvig route, CH₄ and NMVOC emission factors are taken from Bengtsson et al. (2011).

For marine engines using diesel or residual oil, VOC/CH₄ splits are taken from EMEP/EEA (2025).

The source for CH₄ emission factors for aircraft main engines (jet fuel) is the EMEP/EEA guidebook (EMEP/EEA, 2025). For aircraft auxiliary power units (APU), ICAO (2020) is the data source for VOC emission factors and VOC/CH₄ splits for aviation are taken from EMEP/EEA (2025).

5.2.4 Calculation method

Air traffic

For aviation, the emissions are calculated in DEMOS-Aviation as the product of the projected fuel consumption and emission factors derived from flight activity statistics (see paragraph 5.2.1). The calculations are made separately for domestic and international flights and a furthermore split into LTO and cruise. For more details regarding the calculation procedure, please refer to Winther (2024).

Non-road working machinery and recreational craft

The fuel consumption and emissions are calculated in DEMOS-NRMM as the product of the number of engines, annual working hours, average rated engine size, load factor and fuel consumption/emission factors. For diesel and gasoline engines, the deterioration effects (due to engine ageing) are included in the emission calculation equation by using deterioration factors according to engine type, size, age, lifetimes and emission level. For diesel engines before Stage IIIB and IV, transient operational effects are also considered by using average transient factors. For more details regarding the calculation procedure, please refer to Winther (2024).

National sea transport and international sea transport

The fuel consumption and emissions for domestic ferries are bottom up calculated in DEMOS-Navigation as the product of the number of round trips, sailing time per round trip, engine size, load factor, and fuel consumption/emission factors. For other national sea transport, fuel-based calculations are made using fuel-related emission factors and residual fuel consumption (the difference between DECO26 fuel consumption for national sea transport and bottom-up fuel consumption for domestic ferries) as explained in Winther (2024). For international sea transport, fuel-based calculations are made in DEMOS-Navigation using fuel-related emission factors and fuel consumption from DECO26 as explained in Winther (2024).

Fisheries

The fuel consumption and emissions for fisheries are bottom up calculated in DEMOS-Navigation for each fishing trip as the product of vessel engine size, load factor, sailing time per fishing trip, and fuel consumption/emission factors.

The calculated fuel consumption and emissions for fishing vessels are adjusted in a fuel balance to account for all fuel projected for fisheries in DECO26.

Railways

In DEMOS-Railways, the fuel consumption and emissions are calculated for Danish State Railways and private railway lines as the product of total train set km split into train littera types, and km-based fuel consumption/emission factors per train littera type.

The calculated fuel consumption and emissions for the train activities are adjusted in a fuel balance to account for all fuel projected for railways in DECO26.

Military

For military, the emissions are calculated as the product of fuel consumption from DECO26 and fuel-related emission factors.

Sub-sectoral fuel transfers between DECO26 and the emission projections

The DECO26 fuel totals for the CRF sectors 1A2 (manufacturing industries), 1A4a (commercial/institutional), 1A4b (residential) and 1A4c (agriculture/forestry/aquaculture/fisheries) are used in the emission projections as totals for these sectors to obtain a fuel balance. However, based on bottom-up calculations for non-road mobile machinery in DEMOS-NRMM, a different split of non-road mobile and stationary fuel consumption is made, compared to the sub-sectoral fuel splits also provided by DEA in DECO26.

5.3 Fuel consumption and emission results

An overview of the emission results is given in Table 5.12 for all mobile sources in Denmark.

Table 5.12 Overview of emission results for all mobile sources in Denmark.

		1990	2000	2005	2010	2015	2020	2024	2025	2030	2035	2040	2045	2050
CO ₂ , kt	Industry - Other (1A2g)	532	562	637	713	605	610	675	636	528	446	355	277	213
	Civil Aviation nat. (1A3a)	215	169	156	180	133	75	124	126	50	103	83	73	37
	Road - Cars (1A3bi)	5043	6368	6505	6438	6400	5895	5372	5077	2752	1341	506	188	80
	Road - Light duty trucks (1A3bii)	1357	1690	2061	2166	1671	1496	1640	1908	1313	674	270	85	26
	Road - Heavy duty vehicles (1A3biii)	2891	3091	3632	3478	3441	3608	2774	1418	920	400	226	123	55
	Road - Motorcycles and mopeds (1A3biv)	46	72	70	71	70	67	61	50	50	48	46	42	38
	Railways (1A3c)	297	228	232	243	237	188	166	156	67	15	0	0	0
	Navigation (1A3d)	709	593	694	590	419	461	408	486	303	297	288	221	154
	Comm./Inst. (1A4a)	152	159	205	236	213	176	162	111	30	12	4	1	0
	Residential (1A4b)	26	30	34	36	32	27	23	27	27	27	27	27	27
	Agriculture/forestry (1A4c)	595	633	702	737	699	679	682	0	0	0	0	0	0
	Fisheries (1A4c)	641	693	544	447	385	338	336	0	0	0	0	0	0
	Other (1A5b, military mobile)	119	111	271	107	98	146	65	65	65	65	65	65	65
	Other (1A5b, recreational craft)	48	87	103	99	93	92	92	92	92	92	92	92	92
	Navigation int. (1A3d)	3012	4029	2356	2093	2305	1638	3236	3196	3098	2891	2490	1736	1298
	Civil Aviation int. (1A3a)	1764	2334	2553	2396	2620	979	2879	2827	2764	2309	1871	1635	829
CH ₄ , t	Industry - Other (1A2g)	48	39	35	31	25	21	19	7	6	5	4	3	2
	Civil Aviation nat. (1A3a)	4	2	4	2	1	1	1	1	1	1	1	1	1
	Road - Cars (1A3bi)	2571	1566	920	487	290	178	155	140	86	51	27	14	8
	Road - Light duty trucks (1A3bii)	200	166	111	55	22	8	5	5	3	2	1	1	0
	Road - Heavy duty vehicles (1A3biii)	294	310	326	138	47	16	12	9	4	2	1	1	1
	Road - Motorcycles and mopeds (1A3biv)	89	140	115	95	85	73	61	49	45	40	34	29	25
	Railways (1A3c)	12	9	9	7	5	3	2	2	1	0	0	0	0
	Navigation (1A3d)	10	9	11	9	25	28	12	14	10	10	9	9	9
	Comm./Inst. (1A4a)	33	43	73	43	36	30	22	19	7	3	1	0	0
	Residential (1A4b)	47	55	60	45	24	21	16	18	16	16	17	17	17
	Agriculture/forestry (1A4c)	206	101	78	76	56	44	40	0	0	0	0	0	0
	Fisheries (1A4c)	8	9	7	6	6	5	5	0	0	0	0	0	0
	Other (1A5b, military mobile)	5	5	12	3	2	4	2	2	2	2	2	2	2
	Other (1A5b, recreational craft)	77	87	62	24	9	7	6	6	5	5	5	5	5
	Navigation int. (1A3d)	43	61	37	34	39	28	57	56	55	52	46	32	24
	Civil Aviation int. (1A3a)	10	10	10	10	9	3	8	8	8	8	8	8	7
N ₂ O, t	Industry - Other (1A2g)	20	23	26	30	27	28	32	31	26	22	17	14	11
	Civil Aviation nat. (1A3a)	10	8	8	9	7	4	6	7	7	7	7	7	7
	Road - Cars (1A3bi)	181	263	228	189	172	136	116	112	51	21	7	3	1
	Road - Light duty trucks (1A3bii)	10	36	61	66	53	43	46	54	37	19	7	2	1
	Road - Heavy duty vehicles (1A3biii)	104	61	46	101	376	857	763	359	279	92	36	16	7
	Road - Motorcycles and mopeds (1A3biv)	1	1	1	1	1	1	1	1	1	1	1	1	1
	Railways (1A3c)	9	7	7	7	8	6	5	5	2	0	0	0	0
	Navigation (1A3d)	18	15	17	15	11	12	10	12	8	8	7	7	7
	Comm./Inst. (1A4a)	6	6	7	8	8	7	6	4	1	0	0	0	0
	Residential (1A4b)	0	0	1	1	1	0	0	0	0	0	0	0	0
	Agriculture/forestry (1A4c)	22	26	29	32	32	32	33	0	0	0	0	0	0
	Fisheries (1A4c)	16	17	13	11	9	8	8	0	0	0	0	0	0
	Other (1A5b, military mobile)	4	3	7	3	5	8	4	4	5	4	4	4	4
	Other (1A5b, recreational craft)	1	3	3	3	4	4	4	3	3	3	3	3	3
	Navigation int. (1A3d)	76	102	59	53	58	41	82	81	78	73	63	44	33
	Civil Aviation int. (1A3a)	59	81	87	81	89	33	97	97	99	97	95	95	93
CO ₂ -eq., kt	Industry - Other (1A2g)	539	569	645	721	613	618	684	644	535	452	359	281	216
	Civil Aviation nat. (1A3a)	218	172	158	183	135	77	126	128	52	105	85	75	39
	Road - Cars (1A3bi)	5163	6482	6591	6502	6454	5936	5407	5110	2768	1348	509	189	80
	Road - Light duty trucks (1A3bii)	1365	1704	2080	2185	1686	1508	1652	1922	1323	680	272	85	26
	Road - Heavy duty vehicles (1A3biii)	2927	3116	3653	3508	3542	3836	2977	1514	994	424	235	127	57
	Road - Motorcycles and mopeds (1A3biv)	49	76	74	74	73	70	63	51	52	50	47	43	39
	Railways (1A3c)	300	230	235	245	239	189	167	158	68	15	0	0	0
	Navigation (1A3d)	714	597	699	595	423	465	411	489	305	299	290	223	156
	Comm./Inst. (1A4a)	154	161	209	239	216	179	164	113	31	12	5	1	0

Continued

Residential (1A4b)	27	32	36	37	33	28	23	28	28	28	28	28	28
Agriculture/forestry (1A4c)	606	643	712	748	710	688	692	0	0	0	0	0	0
Fisheries (1A4c)	645	697	548	450	387	341	338	0	0	0	0	0	0
Other (1A5b, military mobile)	120	112	273	108	100	149	66	66	66	66	66	66	66
Other (1A5b, recreational craft)	50	90	106	101	94	93	93	93	93	93	93	93	93
Navigation int. (1A3d)	3033	4058	2373	2108	2321	1650	3260	3219	3121	2912	2508	1748	1307
Civil Aviation int. (1A3a)	1780	2356	2576	2418	2644	988	2905	2853	2790	2335	1896	1660	854

5.3.1 Road transport

The total CO₂ emissions decrease is expected to be 98 % from 2024-2050. Passenger cars have the largest fuel consumption share followed by heavy duty vehicles, light commercial vehicles, buses and 2-wheelers in decreasing order, see Figure 5.3.

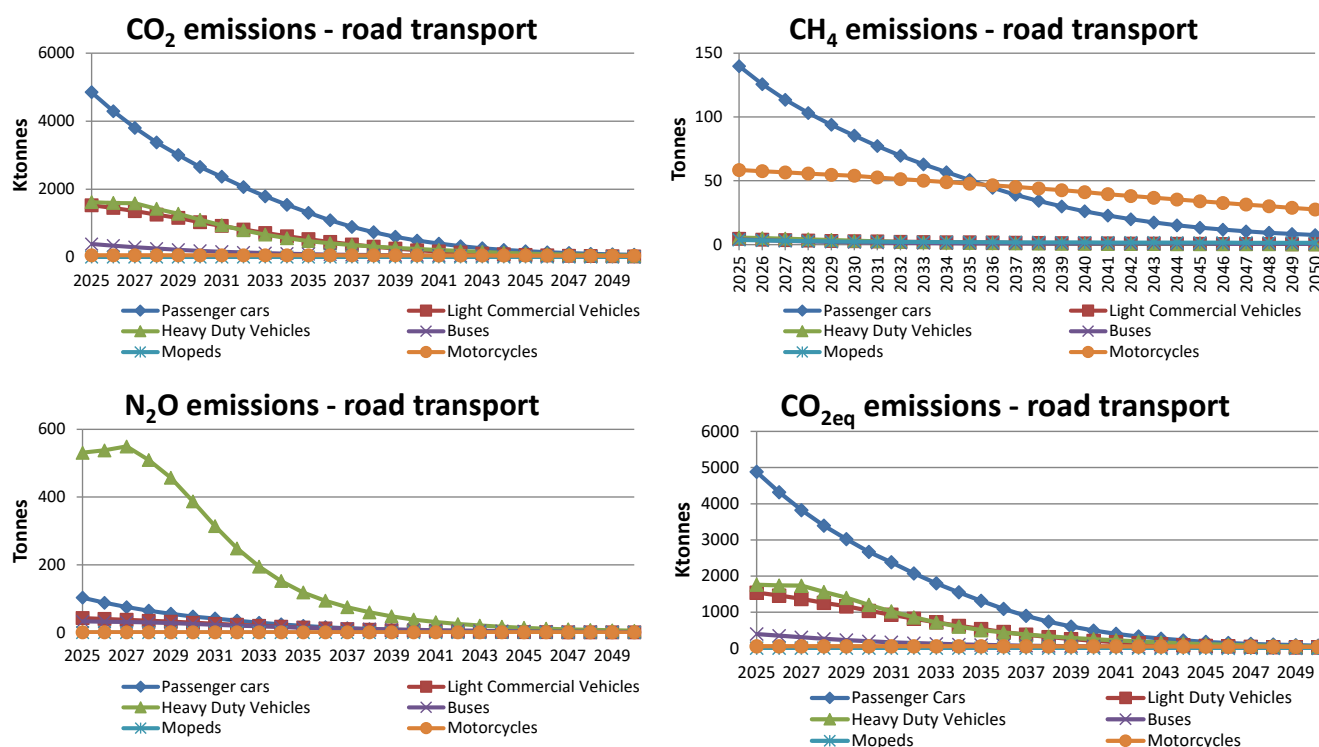


Figure 5.3 CO₂, CH₄, N₂O and CO₂e emissions from 2024-2050 for road traffic.

The majority of the CH₄ emissions from road transport come from gasoline passenger cars, and for N₂O heavy duty vehicles are the largest emission source (Figure 5.3). The CH₄ and N₂O emissions decrease by 83 % and 99 %, respectively, from 2024 to 2050.

5.3.2 Other mobile sources

The development in CO₂ emissions for other mobile sources, see Figure 5.4, corresponds with the development in fuel consumption. Agriculture/forestry/fisheries (1A4c) is by far the largest source of CO₂ emissions followed by Industry (1A2g) and Navigation (1A3d). Minor CO₂ emission contributing sectors are Commercial/institutional (1A4a), Other (1A5), Domestic aviation (1A3a), Railways (1A3c) and Residential (1A4b).

Agriculture/forestry/fisheries (1A4c) is the most important source of N₂O emissions, followed by Industry (1A2g) and Navigation (1A3d). The emission

contributions from Railways (1A3c), Commercial/institutional (1A4a) and Residential (1A4b) are small compared to the overall N₂O total for other mobile sources.

The majority of the CH₄ emissions comes from Residential (1A4b) and Agriculture/forestry/fisheries (1A4c). Navigation (1A3d), Commercial/institutional (1A4a) and Other (1A5) also have notable CH₄ emission contributions. Only small emission contributions are noted for the remaining other mobile sectors.

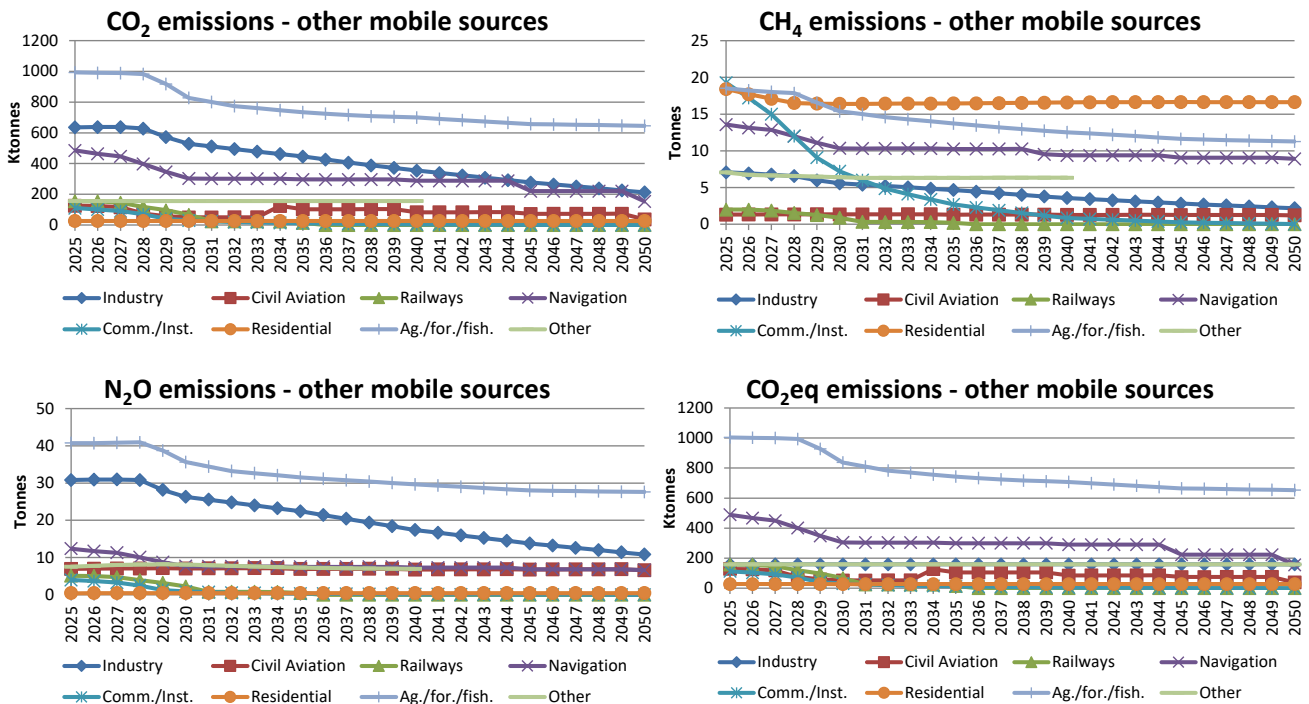


Figure 5.4 CO₂, CH₄, N₂O and CO_{2e} emissions from 2025-2050 for other mobile sources.

5.4 Model structure for the DEMOS mobile emission models

The DEMOS (Danish Emission model system for Mobile Sources) model developed at DCE, Aarhus University, is used to calculate the historical emission inventories and projections for mobile sources. The DEMOS model system comprises database models for road transport (DEMOS-Road), aviation (DEMOS-Aviation), navigation (DEMOS-Navigation), railways (DEMOS-Rail) and non-road mobile machinery (DEMOS-NRMM). The input data are organised in tables for fleet/stock and operational data as well as fuel sale figures. Output fuel consumption and emission results are obtained through linked database queries.

5.5 References

Bengtsson, S., Andersson, K. & Fridell, E. 2011: A comparative life cycle assessment of marine fuels: liquefied natural gas and three other fossil fuels, 14 pp., Proc. IMechE Vol. 225 Part M: J. Engineering for the Maritime Environment (DOI: 10.1177/1475090211402136).

DEA, 2025: Future fuel efficiency improvement rates for passenger cars, vans and trucks provided by the Danish Energy Agency.

DEA, 2026: Denmark's Energy and Climate Outlook – DECO26.

DNV, 2009: Marpol 73/78 Annex VI Regulations for the Prevention of Air Pollution from Ships - Technical and Operational implications, 32 pp.

EMEP/EEA, 2025: Air Pollutant Emission Inventory Guidebook, prepared by the UNECE/EMEP Task Force on Emissions Inventories and Projections (TFEIP). Available at: [EMEP/EEA air pollutant emission inventory guidebook 2023 – European Environment Agency \(europa.eu\)](https://www.eea.europa.eu/en/publications/emep-eea-air-pollutant-emission-inventory-guidebook-2023-european-environment-agency-europa.eu) (12-01-2026).

Energinet.dk, 2022: Energinet Gaskvalitetsdata for 2013, data provided by Energinet.dk.

Fenhann, J. & Kilde, N.A. 1994: Inventory of Emissions to the air from Danish Sources 1972-1992, 111 pp., ISBN 87-550-1943-9, RISØ National Laboratory.

Hansen, K.F. & Jensen, M.G. 2004: MÅLING AF EMISSIONER FRA FREMDRIVNINGSSANLÆG PÅ MADSELSKABET RUSTON 20RK270, Sagsnr.: 1076868, Documentation note, 5 pages (in Danish).

ICAO, 2008: ICAO Annex 16 "International standards and recommended practices, Environmental protection", Volume II "Aircraft engine emissions", 3rd ed. (2008) plus amendments, 108 pp., International Civil Aviation Organization, ISBN 978-92-9231-123-0.

ICAO, 2011: Airport Air Quality Manual (doc. 9889), first ed. International Civil Aviation Organization. ISBN 978-92-9231-862-8.

ICAO, 2017: ICAO Annex 16 "International standards and recommended practices, Environmental protection", Volume III "Aeroplane CO₂ emissions", 28 pp., International Civil Aviation Organization.

ICAO (2020): Airport Air Quality Manual (doc. 9889), second edition 2020, ISBN 978-92-9258-963-9 International Civil Aviation Organization.

ICCT, 2017: International Civil Aviation Organization's CO₂ standard for new aircraft, ICCT Policy update, 8 pp., International Council on Clean Transportation, 2017.

IFEU, 2004: Entwicklung eines Modells zur Berechnung der Luftschadstoffemissionen und des Kraftstoffverbrauchs von Verbrennungsmotoren in mobilen Geräten und Maschinen - Endbericht, UFOPLAN Nr. 299 45 113, pp. 122, Heidelberg.

IFEU, 2009: Aktualisierung des Modells TREMOD - Mobile Machinery (TREMOD-MM), Endbericht; Institut für Energie- und Umweltforschung, pp. 48, Heidelberg.

IFEU, 2014: Erarbeitung eines Konzepts zur Minderung der Umweltbelastung aus NRMM (non road mobile machinery) unter Berücksichtigung aktueller Emissionsfaktoren und Emissionsverminderungsoptionen für den Bestand, ISSN 1862-4804, Texte 24/2014, pp. 99, Heidelberg.

IFEU 2020: Aktualisierung der Modelle TREMOD/TREMOD-MM für die Emissionsberichterstattung 2020 (Berichtsperiode 1990-2018) Berichtsteil „TREMOD-MM“, ISSN 1862-4804, Texte TEXTE 117, pp. 110, Heidelberg.

- Jensen, T.C. 2024: Dokumentation af konvertering af trafiktal til emissionsopgørelser, arbejdsnotat 81815, 41 pp. DTU Transport, 2024.
- Johnsen, T. 2018: Personal communication, Thomas Johnsen, The Danish Bicycle Traders Association.
- Kristensen, F. 2013: Unpublished data material from Mols-Linjen.
- Lloyd's Register, 2012: Implementing the Energy Efficiency Design Index Version 3.0, December 2012, pp. 22.
- Matzer C., Weller K., Dippold M., Lipp S., Röck M., Rexeis M., Hausberger S. 2019: Update of emission factors for HBEFA Version 4.1; Final report, I-05/19/CM EM-I-16/26/679 from 09.09.2019, TU Graz.
- Ministry of Transport, 2015: TEMA2015 - et værktøj til at beregne transporters energiforbrug og emissioner i Danmark (TEMA2015 - a calculation tool for transport related fuel use and emissions in Denmark). Technical report. 126 pp.
- Mølgård, J. 2020: Unpublished data material from the Danish State Railways.
- Nielsen, D. 2022: Unpublished data material from Mols-Linjen.
- Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrechtsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Callisen, L.W., Andersen, T.A., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott-Bentsen, N., Rasmussen, E., Petersen, S.B., Baunbæk, L., & Hansen, M.G. 2025. Denmark's National Inventory Document 2025. Emission Inventories 1990-2023 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE – Danish Centre for Environment and Energy, 929 pp. Scientific Report No. 655. Available at: [Denmark's National Inventory Document 2025 - Emission Inventories 1990-2023 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement](#).
- Notter, B. & Schmied, M. 2015: Non-road energy consumption and pollutant emissions. Study for the period from 1980 to 2050. Federal Office for the Environment, Bern, 237 pp. Environmental studies no. 1519. Available at: [Non-road energy consumption and pollutant emissions \(admin.ch\)](#).
- PHP, 1996: Research Report – Emission tests at Alpha, Mols 2 and Mols 4, 9L25MC mk6 engines #35031 and #35033, 22-23/10 1995 and 16/1 1996, DOK, PHP Basic Research, October 1996, 20 pages.
- Tietge, U., Mock, P., Franco, V. & Zacharof, N. 2017: From laboratory to road: Modeling the divergence between official and realworld fuel consumption and CO₂ emission values in the German passenger car market for the years 2001–2014, Energy Policy 103 (2017) 212–222. Available at: <http://dx.doi.org/10.1016/j.enpol.2017.01.021>

Tietge, U., Díaz, S., Mock, P., Bandivadekar, Dornoff, J.A., Ligterink, N. 2019: From laboratory to road. A 2018 update of official and “real world” fuel consumption and CO₂ values for passenger cars in Europe, ICCT White paper, 56 pp., International Council on Clean Transportation, 2019.

Winther, M. & Ekman, B. 1998: Emissioner fra vejtrafikken i Danmark 1980-2010. Danmarks Miljøundersøgelser, Aarhus Universitet, 1998. 73 s. (Faglig rapport fra DMU, Vol. 256).

Winther, M. & Nielsen O. 2006: Fuel use and emissions from non road machinery in Denmark from 1985-2004 - and projections from 2005-2030. Environmental Project 1092. The Danish Environmental Protection Agency. 238 pp. Available at:
<http://www.mst.dk/udgiv/Publications/2006/87-7052-085-2/pdf/87-7052-086-0.pdf>

Winther, M. 2023: Energy consumption and emissions from non-road machinery in Denmark. Time series from 1980-2040. Aarhus University, DCE – Danish Centre for Environment and Energy, 132 pp. Scientific Report from DCE – Danish Centre for Environment and Energy No. 578. Available at:
<http://dce2.au.dk/pub/SR578.pdf>

Winther, M. 2024: Danish emission inventories for road transport and other mobile sources. Inventories until 2022. Aarhus University, DCE – Danish Centre for Environment and Energy, 150 pp. Scientific Report No. 624. Available at:
https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_600-699/SR624.pdf.

Wismann, T. 1999: MOLS-LINIEN, Mai Mols - Måling af emissioner fra hovedturbiner, dk-RAPPORT 14.901, 9 pages (in Danish).

6 Agriculture

The emission of greenhouse gases from the agricultural sector includes the emissions of methane (CH₄), nitrous oxide (N₂O) and carbon dioxide (CO₂). The emission is mainly related to the livestock production and includes CH₄ emission from enteric fermentation and manure management as well as N₂O emission from manure management and nitrogen inputs on agricultural soils. Furthermore, minor CH₄ and N₂O emissions are estimated from burning of straw on fields. The CO₂ emission from the agricultural sector covers emissions from liming, urea applied to soils and use of inorganic N fertilizer.

It must be noted that CO₂ removals/emissions from agricultural soils are not included in the agricultural sector. According to the IPCC guidelines, these removals/emissions should be included in the LULUCF sector (Land-Use, Land-Use Change and Forestry). The same comment applies to the emissions related to agricultural machinery (tractors, harvesters, and other non-road machinery); these emissions are included under mobile combustion.

Central assumptions on frozen policy

Regarding the environmental regulation for the agricultural production, a number of climate measures have been introduced in the last few years to reduce CH₄ emissions from livestock production supplementing the focus on ammonia emissions and nitrogen losses to the aquatic environment. Improvements of the nitrogen utilization and subsequent decrease in nitrogen losses indirectly reduce the greenhouse gas emission because changes in nitrogen also affect the emission of N₂O. Continuous changes in allocation of barn types and the enlargement of the biogas production, influences the management of animal manure and thus also affect the methane emission.

The current projection considers the elements included in the Political agreements and regulation initiated or decided until 1 January 2026 (so called “frozen policy” or projection “with existing instruments”). The effects of the political measures are included in the emission projection based on prerequisites on the impact estimated by the relevant authority. For this projection, measures in relation to the Green Tripartite Agreement; “Agreement on a Green Denmark” (AGD, 2024a; 2024b) and “Agreement on Implementation of a Green Denmark” as well as elements rooted in “Agreement on the Green Transition for Danish Agriculture” (AGTDA, 2021) is considered as frozen policy and is reflected in the emissions. The most recent “Sub-Agreement on the Transition to a New Nitrogen Regulation Model” from December 2025 is not included as the impacts were not sufficiently consolidated at the deadline for frozen policy baseline. The Ministry of Green Transition¹³ (MGT) and its two agencies; The Agency for Green Transition and Aquatic Environment (SGAV) and The Danish Nature Agency (NST) deliver on central frozen policy assumptions for this projection, which is coordinated by the Ministry of

¹³ The Ministry of Green Transition (Danish: Ministeriet for Grøn Trepert) was formed in 2024 to support implementation of elements in The Agreement of Green Denmark as a combination of related sections within both the Ministry of Environment and the Ministry of Food, Agriculture and Fisheries of Denmark.

Climate, Energy and Utilities as responsible for the Climate Projection (KEFM 2025a; 2025b; 2026a; 2026b; 2026c; MGT 2026; MIM 2024).

This means that the following measures are considered; tax on CO₂ emissions from livestock production and organic soils, subsidy for use of CH₄ reducing feeding of dairy cattle through increased content of fatty acids or by use of Bovaer, fewer hectares of cultivated agricultural soils due to expansion of forest area, wetlands and infrastructure (rails and cities). Furthermore, subsidy for decreased use of fertilizer increased area with catch crops and organic cultivated area and inclusion of schemes that result in management changes from intensive to more extensive farming (more grassland and crop-free edges). The initiatives mentioned have an impact, lowering the future total nitrogen inputs to the agricultural land and to a decrease in the nitrogen leaching.

The projection also considers an effect from specific emission reducing technologies, based on estimates of deployment made by SEGES Innovation (SEGES, 2025) (agricultural advisory company) and estimates on NH₃ reduction effects from the Ministry of Environment (SGAV, 2026). The future biogas production is based on a projection provided by the Danish Energy Agency (DEA, 2026).

The future expectations to the livestock production and the agricultural area are based on estimates from the Agricultural Projection 2025-2050 based on the GreenREFORM model by the Danish Research Institute for Economic Analysis and Modelling (DREAM, 2025). The expected effects of the CO₂ taxation are included in the projected animal numbers, but not in the projected use of technologies. See further section 6.3 Methodology.

6.1 Projected agricultural emission 2025 - 2050

The latest official reporting of emissions includes time series until 2024 for all emission sources. The development of agricultural greenhouse gases from 1990 to 2024 (Table 6.1) shows a decrease from 14.5 million tonnes CO₂ equivalents to 11.2 million tonnes CO₂ equivalents, which corresponds to a 22 % reduction. In the current projection, based on the assumptions provided, the emissions decrease with 35 % from 2024 to 2050, and thus the total emission is estimated to hit 7.3 million tonnes CO₂ equivalents by 2050. Direct emissions from livestock from enteric fermentation and manure management make up 61 % of emissions in 2050. N₂O emissions from activities related to cultivation of the agricultural soils contribute with the vast majority of the remaining emissions; 36 % in 2050.

The development towards lower total greenhouse gas emissions is particularly driven by an expected decrease in CH₄ and N₂O emission from manure management due to expansion of the biogas production and frequent removal of slurry from swine barns. Furthermore, the decrease is also affected by lower emission from enteric fermentation due to the above-mentioned regulatory requirements on CH₄ reductions, regular expected changes in feeding for cattle and decrease in number of animals. Next, a decrease in emissions of N₂O from cultivation of agricultural soils is expected due to a lower nitrogen supply, caused by reduction in cultivated agricultural land, subsidy for decreased use of fertilizer and schemes which promote more extensive cultivation where fertilizer is not allowed and thus result in lower emission from N-leaching.

Table 6.1 Historical and projected emissions from the agricultural sector, kt CO₂ equivalents.

Emission source	GHG	1990	2010	2024	2025	2030	2035	2040	2045	2050
Enteric fermentation	CH ₄	4 341	3 894	3 864	3 736	3 159	2 954	2 804	2 727	2 703
Manure management	CH ₄ , N ₂ O	3 884	4 717	3 599	3 672	2 840	2 392	2 106	1 910	1 798
Agricultural soils	N ₂ O	5 656	3 996	3 578	3 619	3 153	2 925	2 806	2 684	2 623
Field burning of agricultural residues	CH ₄ , N ₂ O	2	2	3	3	3	3	3	3	2
Liming	CO ₂	565	153	183	222	210	200	193	187	185
Urea application	CO ₂	15	1	6	6	5	5	5	5	5
Other carbon-containing fertilizers	CO ₂	33	2	3	4	4	4	4	4	4
Total		14 496	12 765	11 236	11 262	9 375	8 481	7 921	7 519	7 320

For further breakdown of the projected emissions on specific emission sources see section 6.8 Results.

6.2 Comparison with previous projection

The total emission from the agriculture sector given in CO₂ equivalents has not changed dramatically when comparing the current projection with the latest greenhouse gas projection (Nielsen et al., 2025). Projected emissions have increased by up to 1.8 %, decreasing in difference towards 2050, where the two projections differ by only 0.4%. The total, however, represents significant both increases and decreases within the various emission sources. The most substantial changes for the projection in order of magnitude (listed for 2050) occurred within; manure management from swine, manure management from other cattle enteric fermentation from swine and inorganic N fertilizers. In the early projected years changes within cultivation of organic soils, animal manure applied to soils and crop residues also have a considerable impact on the overall changes.

Some of the changes of the emission trend for the current projection are related to the latest historical emission inventory and an update of the latest historical year, from 2023 to 2024. Aside from methodological changes implemented in the historical inventory, the yearly update represents a new 'starting point' for the expected changes. For some emission sources that can have a particular impact because they are projected based on average values of the latest historical years or an interpolation between 2050 and the latest historical year.

Central data input assumptions that change yearly include projections of; number of animals, distribution of animals on various barn- and manure management systems and application of environmental technologies, extend of the cultivated agricultural area, various crop type distribution and crop yields. Feed intake, N excretion, milk yields and Ym factors for central livestock categories are updated every third year. These are described in more detail in sections of the impacted emission source.

Figure 6.1 shows the historical emissions as well as the projected emission trend for total CH₄ and N₂O for the current projection alongside last year's projection. For historical years the CH₄ emissions are slightly lower, primarily due to lower emissions of enteric methane from swine due to an adjusted methane conversion factor. The CH₄ emission in the projected years is very similar to last year's projection but the total in the figure represents a decrease

from enteric fermentation (<4%) and an increase (<8 %) from manure management. The N₂O emission is almost unchanged in historical years but are slightly higher than last year, mainly because of changes within crop residues. For the projected years, the figure also shows higher emission estimates for all years except 2050 compared to last year's projection. The projected increase is mainly due to increases in emissions from crop residues and manure applied to soils, that are only partly outweighed by decreases in emissions from inorganic nitrogen fertilizers and nitrogen leaching and run-off.

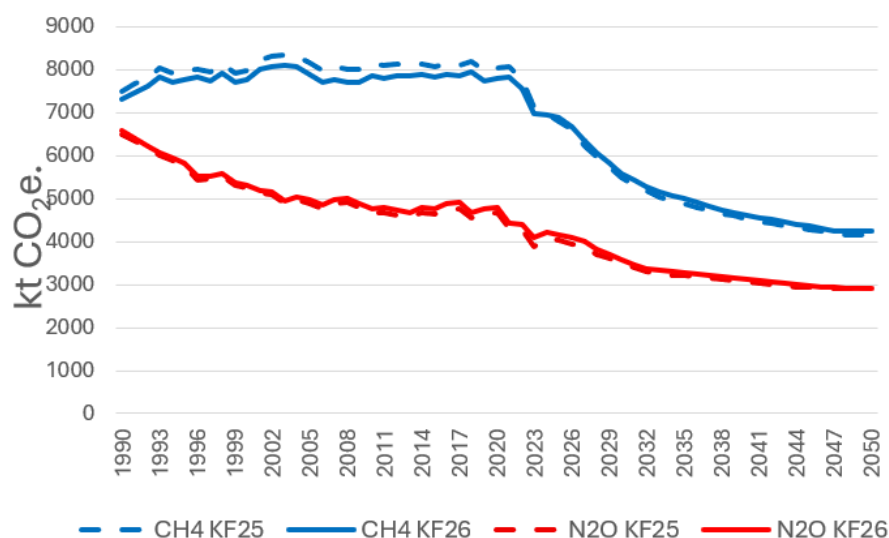


Figure 6.1 Emissions of CH₄ and N₂O in CO₂ equivalents for the current projection 2026 (KF26 – full line) compared with projection 2025 (KF25 – dashed line).

CH₄

As mentioned above the total CH₄ emission is very similar in the projected years and only differs with <1.5 % from the previous projection. As mentioned above this represents changes within enteric methane as well as manure management, that end up nearly outweighing each other.

Enteric fermentation from swine has changed for the entire period because of the implementation of a new methane conversion factor (Y_m factor) for weaners and fattening pigs, decreasing the projected enteric emission from swine by up to 30 %. This improvement also explains the main part of the greater difference over the historical period. Because most emissions from enteric fermentation are related to cattle, the decrease in swine has a smaller overall impact. The historical change was also partly affected by an adjusted amount of bedding material for bulls and pigs and a correction in the number of animals. For the projected years, the reduction in enteric CH₄ from swine decreases due to a higher number of swine compared to the last projection.

Enteric fermentation – swine

For swine, a substantial recalculation has been made, and the current projection represents a 27–40% reduction in emissions across the entire time series from 1990–2050. For 2025 the change was -204 kt CO₂ equivalents. The reason is an adjustment of the methane conversion factor (the Y_m factor) that has been revised for both weaners and fattening pigs. Based on a recent Danish study (Dalby et al., 2025), we have been able to implement a national Y_m factor. This means that the Y_m for the fattening pigs and weaners has been adjusted downward from the IPCC default of 0.6 % to 0.3 %, roughly halving emissions from these two groups. As mentioned, updates on the projected

number of animals leads to higher emissions from enteric fermentation, outweighing some of the reduction. New input data from AU-DCA (Nørgaard & Hellwing 2025) also impacted emissions and included higher feed intake for sows and lower feed intake for weaners and fattening pigs in all projected years.

Manure management – dairy cattle, non-dairy and swine

For all main livestock groups there has been significant changes in emissions from manure management and the majority of both manure management emissions, and the impacted emissions are CH₄. Emissions from dairy cattle and swine have increased with up to 6 and 32 % respectively and non-dairy cattle decreased with up to 23 % in 2050, but the main change occurred for swine. For dairy cattle the higher emissions are due to a higher total number of animals in the agricultural projection from GreenREFORM and for swine the higher emissions are mainly due to the new conversion of data for number of swine, see section 6.4.2. The number of both sows, weaners and fattening pigs have increased significantly, leading to higher total emissions in all years. Especially for the early years in the projection a rise in emissions occurs due to a slower increase in biogas production and as a consequence a lower amount of slurry being treated in biogas plants, based on the Danish Energy Agency's biogas projection compared to the expectations last year (DEA, 2026). Even though there is a slower progression at first, the biogas production and amount of manure treated in biogas is still projected to reach roughly the same level in 2050. This year's projection does not include CH₄ reduction effects from slurry acidification in barns or cooling of manure, which isolated causes differences for both dairy cattle and swine of up to 3 and 4 % and so contributes with a small share of the overall change. The CH₄ reduction effects were excluded from the projection to ensure consistency with the historical inventory, as the CH₄ effects are not sufficiently well documented to be included here. Additionally, this year discrepancies were found between the reference point applied in the available effect assessment (Adamsen et al., 2025) and the current inventory.

For non-dairy cattle the decrease is caused by a significant drop in the number of heifers in the new agricultural projection from GreenREFORM and a following higher share of the non-dairy slurry being treated in biogas plants as well as an adjustment of bedding material to lower amounts causing lower emissions from bulls. Non-dairy cattle are also impacted slightly by the removal of the CH₄ reduction effect of in-barn acidification, increasing emissions with up to 1 %.

N₂O

Compared to the previous projection (KF25), the current projected N₂O emission is higher for all years 2025-2049, with up to 3 % and almost similar but just lower for 2050 with -0,1 % in 2050. The change in emission of N₂O between the current projection and the latest projection is visualized in Figure 6.1 and caused by a number of different changes. The biggest recalculations resulting in increased emissions compared to last year occurred within cultivation of organic soils, crop residues and animal manure applied to soils. Significant reduction in emissions compared to last year for the emission sources inorganic N fertilizers and the related N-leaching and run-off only partly outweigh the increase.

Organic soils

The number of hectares of organic soil being cultivated has increased due to a change in assumptions regarding mineralisation of the soils in the time between the extraction or wetland restoration project is first granted to the full implementation. See section 8.2.1 on recalculations in chapter 8 LULUCF.

Crop residues

Two key factors pull in opposite directions for crop residues, and combined result in the current projection being 4–5 % higher than last years' in the early projection years, decreasing to about 1 % difference in 2050. Reducing emissions with around 5 % in 2050 is the inclusion of yields from a new historical year (2024) and an adjusted crop distribution based on a new Agricultural Projection, decreasing total amount of N from crop residues – and thus emissions. The new historical year provides the yield increase with an adjusted baseline (new norm) and an adjusted slope of the historical yield trend, resulting in lower yields in 2050 for all crop categories except silage maize and root crops. The second and opposing main change comes from a historical recalculation of the total amount of N in crop residues from grassland, which has resulted in a higher total N in crop residues, primarily from grass and clover in rotation. This revision has increased historical emissions by up to 14 %. The effect of this change is the same at the crop level in the projection years, but the impact on the total emissions is also influenced by the altered crop distribution, which means that the N increase for the grasses has less impact in 2050.

Inorganic N fertilizers

Emissions from inorganic N fertilizers follow the development in the future total nitrogen consumption for cultivation of agricultural land. The total future N requirement is largely unchanged compared to last year, but because the current projection assumes a higher number of livestock, a larger share of the N requirement can be met with livestock manure. The need for inorganic N fertilizer is correspondingly reduced, and this is the main reason for the lower emissions. The recalculation for mineral fertilizer is roughly the same across all projection years, with emissions 2–4 % lower than last year. Smaller changes in the reflection of policy measures affecting nitrogen supply also have a relatively smaller impact, see section 6.6.2.

Other significant changes; Organic N fertilizers and N-leaching

For organic N fertilizers (animal manure applied to soils), emissions have increased for all projection years due to a higher number of dairy cattle and especially swine. Emissions of N₂O from nitrogen leaching follow the amount of nitrogen applied and a fixed leaching fraction based on the historical trend. The total nitrogen input to the field comes from livestock manure, grazing deposition, inorganic N fertilizer, sewage sludge, crop residues, and mineralization, and is therefore influenced by many emission sources. The most significant change for this year's projection has been that the leaching fraction has decreased by almost 10 %, from 22.5 % to 20.3 %. The reason the projected leaching is not decreased by the same percentages is that total future N inputs from the many different sources increase in several years, particularly nitrogen applied from livestock manure and crop residues.

6.3 Methodology

The methodology used to estimate the projected emission is based on the same methodology as used in the annual emission inventories. The inventories are based on the 2006 IPCC Guidelines for National Greenhouse Gas Inventories and 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories (IPCC, 2006, IPCC, 2019). Thus, the same database setup is used, as well as the same methodological estimation approach and the same emission factors. The latest emission inventory includes 2024 and the documentation report including descriptions of methodology and data input sources and is published in Nielsen et al., 2026. The latest sector report describing the methodology in further detail has recently been published by Albrektsen & Mikkelsen (2026).

Most emissions from the agricultural sector are related to livestock production, and thus expectations regarding livestock numbers are a key element and have a substantial impact on the emission. Likewise, many emission sources are dependent on the extent of the cultivated agricultural area and crop distribution. For the current projection the assumptions related to the expected development of the livestock and the agricultural area are projected estimates in the Agricultural Projection by the Danish Research Institute for Economic Analysis and Modelling (DREAM, 2025). Previously, the Department of Food and Resource Economics (IFRO) at the University of Copenhagen was responsible for the Agricultural Projection. IFRO's projections were based on the model AGMEMOD (AGriculture MEMber states MODelling), further described in Jensen (2025). DREAM use their model GreenREFORM but has so far continued with much of the same basic approach and background data as used in AGMEMOD. GreenREFORM is an environmental and climate-economic model already used as a central modelling tool in the government's administration e.g. to calculate effects of policy reforms with impacts on the agricultural sector. We refer to the Agricultural Projection or the DREAM web page for updated information on the GreenREFORM model (DREAM 2026). The agricultural projection includes numbers on the area projected for use for the main roughage crops and grasses.

DREAM has used external input assumptions for GreenREFORM regarding the development of the agricultural area and projection of wetlands, afforestation and agricultural extensification schemes as mentioned above from the relevant authorities (MGT; SGAV and NST). These assumptions are coordinated by the Ministry of Climate, Energy and Utilities and communicated to DREAM after a first-hand analysis by the emission projections responsible at the Danish Center for Environment and Energy at Aarhus University (AU-DCE) published in Andersen & Mikkelsen (2026). This analysis includes reductions to the projected agricultural area due to increased need for land for infrastructure purposes (e.g. rails and cities).

Increasing demands to reduce unwanted environmental effects of the livestock production has historically led to additional legislation regarding approvals and establishment of new animal barns with a focus on ammonia reducing technologies. The current projection includes an increase in the uptake of ammonia reducing technologies, which has an indirect impact on N_2O emissions. In previous projections some of these technologies have been attributed with an effect on CH_4 emissions as well, but these have been excluded from this year's projection to ensure alignment with the historical inventory, see section 6.5.1. In the current projection, ammonia reducing technology in-

cludes acidification of slurry (barn, storage, and application), cooling of manure in barns, heat exchanger for poultry barns, manure removal in mink barns two times a week and slurry delivered to biogas plant. Within more recent years an additional focus on climate has led to climate related regulation, still primarily focused on livestock.

Directly greenhouse gas related mitigation measures included in the current projection covers; frequent removal of slurry from swine barns, higher ratio of fatty acids in fodder or use of the feeding subsidy Bovaer for dairy cattle. Frequent removal of slurry from barns influences the estimation of CH₄ from manure management, while higher ratio of fatty acids or use of Bovaer in the fodder influences the estimation of the methane conversion rate (Y_m).

The assumptions regarding distribution on barn and manure management systems and the development in extent of application of emission reducing technologies in livestock production are based on estimations made by SEGES (2025). The predictions of future expansions of biogas production are based on assumptions provided by the DEA (DEA, 2026). Information and future expectations to central livestock parameters are supplied by researchers at the Danish Center for Food and Agriculture (DCA) at Aarhus University.

6.4 Livestock production

For cattle, swine, hens and broilers, the number of animals is based on the model GreenREFORM (DREAM, 2025). For non-dairy cattle, the number of bulls and heifers are projected based on GreenREFORM combined with estimates from DCA (Kristensen and Lund, 2016), to make it convertible with the cattle categories used in the national inventory setup.

The production of horses, sheep, goats, turkeys, ducks and geese is less important, because the contribution for these categories is relatively small compared to production of cattle and swine. Therefore, the number of animals for these categories is kept at the same level as the latest historical year (2024). When it comes to fur bearing animals (mink) the situation changed dramatically in 2020. Because of the risk of developing a COVID-19 variant, the government required to destroy all fur animals, which was done by the end of 2020. Therefore, there was no production of mink in 2021-2022. Mink production has started again in 2023 in small scale and because it is difficult to estimate how it will develop the number of animals is kept at the most recent historical level for all projected years.

6.4.1 Cattle

In AGMEMOD, the projection of the number of dairy cattle is based on a projection of milk production, projected as a function of projected milk yields, milk prices and production costs and GreenREFORM is set up to include the same input data for as many parameters as possible (Jensen, 2025; DREAM, 2025).

In the projected calculations dairy cattle are divided in conventional and certified organic dairy cattle. The estimation of milk yields, feed intake, N-excretion, and methane conversion factor (Y_m) for dairy cattle is provided by DCA (Lund 2025; Lund et al., 2025) and differentiated for both conventional (large breed and jersey) and certified organic dairy cattle (large breed and jersey). The numbers are shown in Table 6.2 below. Production numbers for cattle are

given for 2025, 2030, 2035, 2040 and 2050 and interpolated for all years in between.

The milk yield and the N-excretion are closely related. Increasing milk yield leads to higher feed intake, which results in an increase of N-excretion. The average milk yield for conventional large breed is expected to increase from 11 354 kg/cow/year in 2024 to 14 760 kg/cow/year in 2050, which corresponds to a rise of 30 %. This development corresponds to an N-excretion for large breed conventional dairy cattle at 162 kg N in 2024, increasing to 192 kg N in 2050.

For the estimation of Y_m , feeding plans with a higher ratio of fatty acids in for some and use of the CH₄-reducing feeding supply Bovaer for others is included in the average Y_m for dairy cattle from the year 2025 and forward. Given in Agreement on the Green Transition for Danish Agriculture (AG-TDA, 2021) it is expected that the farmers will reduce the emissions of greenhouse gases by use of higher ratio of fatty acids. In 2024 the requirement for use of fatty acids was adjusted so reduction of emission could also be achieved by the use of Bovaer in 80 days throughout the year. Due to a subsidy scheme for farmers that decide to use Bovaer all year, it is incorporated in the estimation of Y_m that a share of the dairy cattle will be given Bovaer all year. The regulatory requirements are not mandatory for certified organic dairy cattle, as neither mitigation strategy is considered doable for this production system with the current availability and pricing of organic feedstuffs. The estimated Y_m for certified organic dairy cattle therefore does not include the use of Bovaer or higher ratio of fatty acids. The estimation of the extend of use of Bovaer all year is based on estimates by SGAV/MGT (KEFM, 2026a).

The distribution of dairy cattle on barn types, is based on data assumptions from SEGES (2025). The distribution for the certified organic dairy cattle follows the same distribution as applied to conventional because no divided distribution is available. In SEGES (2025) days on grass is differentiated for both conventional and certified organic cattle, as there is a known large difference between the two. Conventional dairy cattle on average have 10 grazing days per year and certified organic dairy cattle on average have 84 grazing days per year and both are set as constant up until 2050.

When compared to the parameters applied in last year's projection, expected milk yields are lower for all groups all years. The Y_m factor is lower for all but conventional jersey dairy cattle and feed intake is lower for all but conventional large-breed dairy cattle in the current projection. The number of grazing days in the current projection has increased by 6 days per year for certified organic dairy cattle and decreased by one day per year, from 11 to 10 days, for conventional dairy cattle.

Table 6.2 Number of dairy cattle, milk yield and other emission related production parameters– from latest historical year to 2050.

Dairy cattle	2024*	2025	2030	2035	2040	2045	2050
No. of dairy cattle, 1000 unit	547	548	492	458	433	417	410
<u>Milk yield, kg milk per cow per year</u>							
Large breed	11 354	11 602	12 345	13 024	13 736	14 248	14 760
Jersey	7 798	7 793	8 292	8 749	9 227	9 571	9 914
Large-breed, organic	-	10 195	10 621	11 049	11 476	11 775	12 074
Jersey, organic	-	7 069	7 365	7 662	7 957	8 165	8 372
<u>N-excretion, kg per year</u>							
Large breed	162	165	172	177	183	188	192
Jersey	132	132	138	143	148	151	155
Large breed, organic	-	154	158	162	165	168	171
Jersey, organic	-	123	127	130	133	135	137
<u>Feed intake, kg dm per year</u>							
Large-breed	8 639	8 841	9 243	9 610	9 995	10 272	10 548
Jersey	6 949	6 977	7 304	7 603	7 916	8 142	8 367
Large-breed, organic	-	8 094	8 325	8 556	8 787	8 949	9 111
Jersey, organic	-	6 406	6 596	6 787	6 976	7 109	7 242
<u>Ym, %**</u>							
Large-breed	5.77	5.34	4.43	4.40	4.38	4.36	4.34
Jersey	5.81	5.42	4.50	4.48	4.45	4.44	4.42
Large-breed, organic	-	5.87	5.84	5.82	5.80	5.79	5.77
Jersey, organic	-	5.93	5.91	5.90	5.88	5.87	5.85

* Weighted average for conventional and organic farmed dairy cattle as the production is not divided in the historical emission inventory.

**Ym factors in the table are weighted including the use of high-level fatty acids and Bovaer in set shares of the production.

For non-dairy cattle, data from the historical Danish normative system for N-excretion for all cattle subcategories show few changes. In the projection, no significant changes in N-excretion are expected and therefore N-excretion for these categories is kept at the same level as 2024. Non-dairy cattle are not subdivided in conventional and organic production, because differentiated information on N-excretion, feed intake and other central production parameters is not available.

6.4.2 Swine

GreenREFORM estimates the number of sows, weaners and fattening pigs based on projections of prices for pig meat and production costs (DREAM, 2025). The livestock count for swine as estimated by GreenREFORM and the previous AGMEMOD differs from the one used in the calculations for the national emission inventory. This partly has to do with the definition of one produced pig, where the emission inventory follows the definition from the Danish normative system and considers the discarded animals during the slaughtering process, as emissions are relevant for all animals used in the production regardless of economic value. To ensure consistency between the calculations related to swine production in the inventory and projections the figures from AGMEMOD have always been converted. For the current projection, a new conversion method has been applied so that the development is based on a simple ratio calculation between the number of swine (standard swine) in the national inventory and the number of swine reported in the GreenREFORM projection over a five-year average (2020–2024). Inventory numbers are; nearly similar but 0.3 % higher for sows, 4 % higher for weaners and 11 % for

fattening pigs. GreenREFORM figures are then multiplied by these percentages. Previously the projection was based on the AGMEMOD trend applied to a three-year average for the production in the inventory. However, as numbers recently have shown a sharp decrease in numbers for especially weaners and fattening pigs, this method was no longer considered adequate to represent the modelled projection.

The shift in conversion method has had a large impact, increasing the reported number of swine used for the projection compared to last year. The number of fattening pigs has increased the most with 19-22 %, the number of sows with 7-8 % and weaners 9-11%. Around 20 % of the increase for weaners is caused by higher numbers in the projection from GreenREFORM.

Table 6.3 Number of produced sows, weaners, and fattening pigs.

Swine	2024	2025	2030	2035	2040	2045	2050
<u>Numbers, millions produced*</u>							
Sows	0.94	0.95	0.86	0.82	0.77	0.71	0.69
Weaners	31.40	32.85	30.09	29.15	28.37	27.14	26.66
Fattening pigs	15.28	15.27	14.21	12.98	12.58	12.21	12.12

*Based on GreenREFORM (DREAM 2025).

The projection of N-excretion for sows, weaners and fattening pigs is based on projection made by DCA (Nørgaard & Hellwing, 2025) and listed in Table 6.4. Compared to last year, the N-excretion has increased for sows and decreased slightly for weaners and fattening pigs. The figures for swine are given for 2025, 2030, 2035, 2040, 2045 and 2050 and interpolated for all years in between.

For sows, the N-excretion increases significantly, e.g. due to expectations on increased feed intake connected primarily to an expected increase in number of piglets per sow, that is projected to increase 24 % from 2025-2050. For weaners and fattening pigs N-excretion is projected to decrease with 32 and 39 % respectively up until 2050, which mainly is related to expected improvements in feed efficiencies. Numbers on feed intake for all groups are based on extrapolations of historical figures over the last 10 years.

Table 6.4 N-excretion, kg N-excretion per animal.

Swine	2024	2025	2030	2035	2040	2045	2050
Sows	21.69	23.41	24.20	25.01	25.83	26.70	27.51
Weaners	0.36	0.34	0.31	0.30	0.27	0.25	0.23
Fattening pigs	2.66	2.76	2.56	2.33	2.13	1.90	1.69

6.4.3 Barn systems

The projection of distribution of cattle in different types of barn systems is provided by SEGES (2025). The estimates are provided for 2030, 2040 and 2050 for dairy cattle and heifers. Distribution for the years from 2024 and in between are interpolated. The projection considers legislation about animal welfare (space requirement, straw etc.) and environmental requirements. In 2024, 88 % of dairy cattle were housed in systems with cubicles. It is assumed for 2050 that 91 % of dairy cattle will be housed in systems with cubicles and the rest in deep litter systems. Tethering barns are phased out before 2030 for both dairy cattle and heifers. Around 21 % of heifers are expected to be housed in deep litter systems in 2050 and the remaining part in barn systems with cubicles.

For bulls and suckling cattle, the distribution on different barn systems for 2025-2050 is set at the same level as 2024, except for the barn type slatted floor-boxes, which is phased out in 2024 due to a ban of this type.

For swine, SEGES (2025) also estimates the distribution of animals on different barn systems. The estimates are made for 2030, 2040 and 2050 and for the years in between the distribution is interpolated. Approximately 99 % of the fattening pigs and weaners are housed in systems with drained or partly slatted floor in 2024 and this is assumed to be 100 % in 2050. For sows, systems where the sow is housed individually are assumed to be phased out before 2050.

Jensen, H.B. (2025) projects distribution of hens and broilers on different barn systems for 2030 and 2035 and the distribution in between is interpolated. For the years 2036-2050 the distribution is set at the same level as 2035. For broilers, it is assumed that the share of slowly growing and organic broilers increases, while the share of 32- and 35-days broilers decrease in the years up to 2035.

For mink, Jensen, H.B. (2025) projects the barn systems used in 2030. There are two types of barn systems in the projection; barns with deep litter and slurry and barns with only slurry, but for 2030 100 % of mink are assumed to be in barns with only slurry. From 2030 it is assumed that the slurry is removed twice a week in 90 % of the barns and once a week in the rest. No production of mink occurred in 2021-2022 due to legislation brought on by COVID-19. The distribution for the years 2025-2029 is interpolated and the same distribution of barn systems for 2030 is used from 2031-2050.

6.5 Emission reducing measures

In the historical emission inventory reduction of NH_3 is included from the following emission reducing technologies; acidification of slurry in barns and slurry tank/during application, cooling of manure, frequent removal of slurry in barns with fattening pigs, heat exchanger in broiler barns and frequent removal of manure in mink barns. The inventory also considers reduced emissions of CH_4 and N_2O as an effect of slurry delivered to the biogas production and frequent removal of slurry from barns reduce the emissions from barns due to a lower retention time.

Following an enhanced research effort, it is expected that reduction of emissions from use of more environmental technology will be increasingly well documented in the near future. The application is also expected to be expanded in the future, mainly caused by the requirements in the Environmental Approval Act for Livestock Holdings (LOV nr. 1057 af 30/06/2020) and the new Agreement on a Green Denmark (AGD, 2024a;2024b). However, to ensure consistency only reduction effects and emission reducing technologies that are sufficiently well-documented to be included in the inventory, are included in the projection.

For reduction of CH_4 from enteric fermentation from dairy cattle, a higher ratio of fatty acids in fodder or use of Bovaer for either 80 or 365 days is included for estimated shares of the dairy cattle population. These measures are planned to be implemented in the historical inventory for 2025, to be submitted in 2027.

See section 6.5.1 and Table 6.7 for an overview of the reduction effects.

6.5.1 Application of emission reducing measures

The assumptions regarding the application of emission reducing technologies in livestock production used in the historical emission inventory is based on e.g. a data analysis on information from the environmental approvals register and an analysis on the number of sold (and maintained) acidification systems (Nielsen et al., 2025b, Annex 3D Chapter 3D-1).

The projected estimates for application of the technologies in the future are listed in Table 6.5 below.

The projection on future application of acidification in barns for both cattle (dairy and other cattle) and swine (sows, weaners and fattening pigs) is provided by SEGES (2025). For cattle the only available technology in barns is, for now, acidification and the projection is used for dairy cattle and heifers. Acidification in barns for cattle is expected to stay at the same level in the future. Acidification of manure in barns for swine is expected to slightly increase in the future.

Projection of swine barns applying cooling of manure, which is used as an NH_3 reduction measure and/or supplementary heating source, is also based on information from SEGES (2025). Manure cooling is the most widely applied technology for overall swine production, particularly in barns for sows and weaners and this trend is expected to continue. For newly build barns, cooling of manure is expected to be installed extensively.

Distribution of barns with frequent removal of slurry from the barn for swine is based on estimations made by the Danish Ministry of Environment for projection 2025 (MIM, 2024), confirmed to remain in force for projection 2026 (KEFM, 2026c). Based on Agreement on the Green Transition for Danish Agriculture (AGTDA, 2021), frequent removal of slurry is by legislation made mandatory from 2023 for barns with fattening pigs and it is expected to be done in 99 % of the barns without acidification in the period 2024-2050. Frequent removal of the slurry is not required if the slurry is acidified and around 1 % of farmers are assumed to get a dispensation. For sows and weaners, the frequent removal is made mandatory in newly build barns, and the distribution is expected to increase to around 89 % in 2050. Frequent removal of slurry from swine barns only reduce emission of CH_4 from the barns.

Use of high ratio of fatty acid in fodder or use of Bovaer are only included for conventional dairy cattle, in the weighted Ym factors as presented in Table 6.2. The use of high level of fatty acids or Bovaer is included as differentiated Ym factors for the respective shares of the cattle production estimated to apply each strategy. Projected use of CH_4 reducing feed with an additional reduction effect to the basic legal requirement as an effect achieved through a funding scheme for use of Bovaer 365 days per year is included based on projection estimations made by the Agency for Green Transition and Aquatic Environment (SGAV), coordinated by and received from the Danish Ministry of Climate, Energy and Utilities (KEFM, 2026). As the legal requirement to include CH_4 reducing measures in the feed was introduced in the autumn of 2025, criticism emerged regarding the adverse effects of Bovaer on e.g. animal health and wellbeing and as a consequence a number of general exemptions were implemented. The estimates on the extended use of Bovaer consequently are associated with considerable uncertainty.

Table 6.5 Emission reducing technology in housing systems included for swine and cattle production, percentage of production.

Cooling of manure	2024	2025	2030	2035	2040	2045	2050
Sows	10	14	35	48	60*	61	61*
Weaners	5	9	30	35	40*	41	42*
Fattening pigs	4	7	20	21	21*	21	21*
Acidification in barn							
Dairy cattle, large-breed	2	2	2	2	2	2	2
Dairy cattle, jersey	3	3	2	2	2	2	2
Heifer, large-breed	0	1	1	1	2	2	2
Heifer, jersey	0	0	1	1	2	2	2
Sows	2	2	3	4	4	4	5
Weaners	1	2	2	2	3	3	3
Fattening pigs	3	3	5	5	6	7	7
Frequent removal of slurry**							
Sows	0	6	25	41	56	70	85
Weaners	0	6	26	43	57	72	87
Fattening pigs	99	96	94	94	93	93	92

*In SEGES (2025), the share of manure cooling is estimated to reach 60 % in 2040 and 80 % in 2050 for sows, 50 % in 2040 and 70 % in 2050 for weaners and to 30 % in 2040 and 40 % in 2050 for fattening pigs. These shares are reduced in the emission projections to avoid a +100 % application of various techniques (including biogas, see section 6.5.2 and Table 6.8), because combinations of emission reducing techniques cannot be handled in the current calculation model.

**Frequent removal of slurry is only mandatory in existing barns for fattening pigs, which is why the extent for sows and weaners in the latest historical year is set to 0. For the projected years the share for fattening pigs is reduced to avoid overlap with acidification.

The only minor difference to the projected application from last year is a small increase in the use of cooling of manure and acidification for sows in 2025 and a decrease in the use of manure cooling for weaners and fattening pigs the same year.

Projection of acidification during application of manure is also based on SEGES (2025). The acidification during application is estimated to increase due to increasing demands for utilisation of N in manure and reduction of emission, which will increase the need for acidification (SEGES, 2025).

Table 6.6 Emission reducing technology during fertilizer application included for swine and cattle production, percentage of production.

	2024	2025	2030	2035	2040	2045	2050
Acidification during application							
Cattle slurry	8	8	12	14	16	16	16
Swine slurry	1	1	2	3	4	4	4

As of 2024, heat exchangers in broiler barns have been included in the normative system as part of the standard barn system, since it is assumed that nearly 100 % have heat exchangers installed. Therefore, no additional reduction effect must be applied for heat exchangers as the case in last year's projection.

As mentioned before, the mink production is not existing in 2021-2022, but a small production has started from 2023, and it is expected that 90 % of the production will remove the manure two times a week in 2030, a relatively sharp increase from 11 % in 2024. The application of technologies for mink is estimated for 2030 by (Jensen, 2021, Pers. Comm.).

6.5.2 Emission reduction effect – NH₃ and CH₄

The emission reduction factors for both NH₃, CH₄ and N₂O emissions used in the projection are given in Table 6.7.

The expected CH₄ reduction effect from acidification of manure and cooling of manure in barns is not included in this year's projection. The CH₄ reduction effects were excluded from the projection to ensure consistency with the historical inventory, as the CH₄ effects are not sufficiently well documented to be included here. Additionally, this year discrepancies were found between the reference point applied in the available effect assessment (Adamsen et al., 2025) and the current inventory. The isolated effect of this exclusion was an increase in CH₄ emissions from manure management overall of up to 3 % (by 2050).

A national model has been developed to estimate methane from untreated, and biogas treated slurry for the inventory and is applied in the same way for the projections (Nielsen et al., 2026). Frequent removal of slurry in swine barns is incorporated in the national inventory model for estimation of CH₄ emission.

Reduction of CH₄ from enteric fermentation is based on Lund et al. (2025) applied through the Ym factors from the same reference. The projected emission calculations include differentiated Ym factors from Lund et al. (2025) on increased level of fatty acids and use of Bovaer in 80 days per year as required by law as well as 365 days per year. Each Ym is applied to the specific share of the dairy cattle production assumed to use the respective CH₄ reducing feeding strategies, as estimated by SGAV (KEFM 2026).

NH₃ reduction due to the use of acidification, heat exchangers used in broiler barns and frequent removal of mink manure, is based on the List of Environmental Technologies from the Agency of Green Transition and Aquatic Environment (SGAV, 2026). This list contains technologies whose environmental effectiveness and practical applicability have been documented though testing.

Table 6.7 Emission reduction percentages for NH₃, CH₄ and N₂O for environmental technologies included in the projection.

Technology	Location	Category	Compound	Reduction, %	Reference
Cooling of manure	Barn	Swine	NH ₃	20	ConTerra (2022)
Acidification	Barn	Cattle	NH ₃	33	SGAV (2026)
	Barn	Swine	NH ₃	64	SGAV (2026)
	Storage	Cattle	NH ₃	18-36	Hafner et al. (2021)
	Storage	Swine	NH ₃	20-43	Hafner et al. (2021)
	Application	Cattle	NH ₃	18-36	Hafner et al. (2021)
	Application	Swine	NH ₃	20-43	Hafner et al. (2021)
Biogas treatment	Storage	Cattle	CH ₄	95	Nielsen et al. (2026)
		Swine	CH ₄	96	Nielsen et al. (2026)
		Cattle	N ₂ O	88	IPCC (2019)
		Swine	N ₂ O	87	IPCC (2019)
Removal of slurry - 2 x weekly	Barn	Mink	NH ₃	27	SGAV (2026)
Bovaer		Dairy cattle	CH ₄	27	Lund et al. (2025)
Increased level of fatty acids		Dairy cattle	CH ₄	6	Lund et al. (2025)

6.5.3 Biogas treatment of animal manure

Biogas treatment leads to lower both CH₄ and N₂O emissions from animal manure. In 2024 approximately 13.3 million tonnes of slurry were treated in biogas plants, equivalent to approximately 38 % of all slurry. Prognoses provided by DEA assume an increase of biogas production on manure-based biogas plants from 30.8 PJ in 2024 to 45 PJ in 2040. The 2040 level is maintained at the same level until 2050.

Data reported from the biogas plants give an overview of the actual amount and different types of biomasses used in biogas production in crop season 2015/2016 to 2023/2024 (register of Biomass Input to Biogas production (BIB)). The BIB register does not fully cover all biogas plants but includes the major biogas producers. DEA estimates that the register covered 80-90 % of the total biogas production in 2017/2018. However, data in this register is used to estimate the relation between the biogas production and the amount of slurry delivered to biogas plants. Based on the average relation for 2022-2024 between biogas production in PJ and slurry input to biogas plants the amount of slurry treated in biogas plants is estimated for the years 2025-2050.

It is assumed as a constant that cattle slurry accounts for 63 % and swine slurry for 37 %, based on data from the BIB register for the last number of years.

Table 6.8 Biogas production on manure-based biogas plants and slurry treated in biogas plants from 2024 - 2050.

Year	Total biogas production, PJ	Biogas production on manure-based biogas plants, PJ	Slurry delivered to biogas plants, M tonnes
2024	32.2	30.8	13.3
2025	32.6	30.8	12.3
2030	40.8	38.9	15.6
2035	46.0	43.9	17.6
2040	47.1	45.0	18.0
2045	47.1	45.0	18.0
2050	47.1	45.0	18.0

A Biogas Task Force set up by the DEA initiated several projects to improve the Danish emission inventory documenting the reduction in GHG emissions resulting from biogas treatment of slurry. One of the outcomes of the projects was a national model estimating the methane loss from manure management, which reflected the actual Danish agricultural conditions; temperature and livestock barn types (Mikkelsen et al., 2016). The model has been updated in 2024 (Nielsen et al., 2025a). The emission depends on excretion of volatile solids, changes in barn type and change in retention time of the slurry in the barns. In the projection, it is assumed that cattle slurry delivered to biogas plants reduce the CH₄ emission from storage by approximately 95 %. It is assumed that swine slurry delivered to biogas production reduces the CH₄ emission from storage by approximately 96 %.

6.6 Agricultural soils

Besides the livestock production, emission sources related to cultivation of the agricultural area also has a relatively large impact and contributes to roughly one third of total emissions from the agriculture sector. The main emission sources are consumption of inorganic nitrogen fertilizer, animal manure applied to soils, crop residues, nitrogen leaching to the aquatic environment and cultivation of organic soils.

6.6.1 Agricultural area

The projection of the agricultural area is based on the area estimated by GreenREFORM (DREAM, 2025), see also the chapter introduction and section 6.3 Methodology. In 2024, the agricultural land is estimated to cover 2605 thousand hectares based on Statistics Denmark, which is expected to decrease to 2469 thousand hectares in by 2030 and further down to 2169 thousand hectares by 2050. This corresponds to a 17 % reduction in the agricultural land from 2024 to 2050 due to extraction to create wetlands, forests or clear areas for infrastructure purposes (cities and roads).

Regarding the agricultural area and emissions from cultivation of the agricultural soils, measures in relation to Agreement on a Green Denmark is considered (AGD, 2024a; 2024b). Based on information from Agency for Green Transition and Aquatic Environment (SGAV) (KEFM, 2025a; 2025b), the following schemes affect changes towards more extensive cultivation of the fields, with increased grassland. For the 2026 projection two schemes are included: Eco-scheme for Biodiversity and Sustainability/Temporary Extensification/Conditionality and Permanent extensification, which account for extensification of 33 thousand additional ha in 2050 as compared to 2024.

The reductions to the overall agricultural area and changes in land-use towards more extensive cultivation are listed in Table 6.9 and the assumptions are described in more detail in Andersen & Mikkelsen (2026).

Table 6.9 Changes in the agricultural land compared to 2024 based on Agreement on a Green Denmark (KEFM 2025a; 2025b), in 1.000 ha.

	2025	2030	2035	2040	2045	2050
Conversion of agricultural land to other land-use categories, accumulated						
Wetlands	0.2	67	119	119	119	119
Forest	2	59	125	193	260	273
Settlements (cities and infrastructure)	2	10	18	27	35	44
Total area converted from agricultural land to other land-use categories	4	136	263	339	414	436
Extensification schemes; impact compared to 2024						
Eco scheme; Biodiversity and sustainability scheme (-2025) /Temporary extensification (2026-) /Conditionality	10	1	1	1	1	1
Eco-scheme; Permanent extensification	7	31	31	31	31	31
Total agricultural area in rotation converted to perennial grass or fallow compared to 2024	18	33	33	33	33	33

The production of different crops depends on a number of different factors including market prices, obtainable yields, weather conditions, regulations etc. and is therefore difficult to project. Livestock production directly depends on roughage crops, and the extent of the main grasses and roughage crops are estimated by GreenREFORM (DREAM, 2025). The crop types provided by GreenREFORM are; grass and feed silages, grasses and clover in rotation, grasses outside rotation and fallow land. The remaining agricultural land area is distributed between the remaining crop categories (including rapeseeds and cereals) by AU-DCE. The distribution of the remaining hectares is based on each crop category's relative share, calculated as the average share over the last five historical years. The historical data on crop distribution is information from Statistics Denmark, table AFG5. The cultivated area sown with catch crops each year also has a big impact on the emissions. The projected number of catch crops is based on data input assumptions from SGAV (KEFM, 2026b).

6.6.2 Use of inorganic nitrogen fertilizers

Use of inorganic fertilizer depends on the extent of the agricultural area and the amount of available nitrogen in other nitrogen sources; animal manure and sewage sludge (amount of N in the farmers nitrogen fertilizer account). The use of inorganic fertilizer is also affected by the policy decisions, where for the current projection includes; increased use of catch crops, two extensification eco-schemes, an increase of arable land certified as organic, and a future subsidy scheme targeted a direct reduction of the N quota. The included measures are all grounded within Agreement on a Green Denmark (AGD, 2024a). The recent partial agreement on a new nitrogen regulation from December 2025 is not included, as the impacts were not fully consolidated at the deadline for frozen policy inclusion to the projection. Hence, the included measures only differ slightly from the included measures last year. Most measures are reflected based on their relative development to the latest historical year and therefore are affected by the level from the new historical year. The effect on reduced nitrogen from the different measures are listed in Table 6.10.

An increased area with catch crops contributes to a retention of N in the soil, which means that the N need is lower in the following growing season. This effect is included in the calculation of the official N quota for the farm, and for the projected emission calculations it is assumed, based on data from SGAV, that the effect is 21.8 kg N/ha (KEFM, 2026b). The area with catch crops is assumed to increase from 462 thousand hectares in 2024 to 606 thousand hectares in 2027 and kept at that level until 2050 (KEFM, 2026b).

The eco-scheme for biodiversity and sustainability / Temporary extensification / conditionality and the eco-scheme for Permanent extensification lower the future N-supply. The 32 674 ha more extensively cultivated area in 2025 (Table 6.9) is expected to lower the N-supply with 139 kg N/ha (average N-supply 2022-2024), which means that the total N-supply decreases by 2.5 kt.

Based on the projected estimates by GreenREFORM, the area that is certified organic will increase by 17 073 hectares from 2024 to 2050. An increase is expected until 2029 and then drops until 2037, while 2037-2050 is nearly no change, but all projected years represents an increase compared to 2024. It is assumed that land farmed as certified organic will reduce the N need by 74.6 kg N per hectare compared with conventional production, which is based on estimates by SGAV. The assumptions on N effect were provided by the Danish Ministry of Climate, Energy and Utilities (KEFM, 2026d).

In relation to the Agreement on a Green Denmark, a subsidy scheme is being established where it is possible for the farmers to receive subsidies for reduced use of nitrogen applied to the soil. Based on estimates from SGAV under the Ministry of the Implementation of the Green Three-Partite Agreement (MGT, 2026) it is assumed that this scheme will reduce the total N-supply between 4.4 %-5.6 % for the years 2028-2050. As is apparent in Table 6.10 a large share of the reduction effect is due to this subsidy scheme, reducing the total N need in 2030 by 18.2 kt.

The combined effect of all included measures reducing the N consumption in the projection reaches a max in 2031, where the total N quota and N supply/ha is expected to be reduced by 10 % compared to a status quo scenario only including overall reductions in agricultural land.

Table 6.10 Consumption of inorganic nitrogen fertilizers.

	2024	2025	2030	2035	2040	2045	2050
Agricultural area, 1000 ha	2 605	2 601	2 469	2 342	2 266	2 190	2 169
Total N quota, kt N	368	362	344	326	316	305	302
<u>Reduced N quota:</u>							
Catch crops, kt N		0.5	3.1	3.1	3.1.1	3.1.1	3.1.1
Extensification, kt N		2.5	4.6	4.6	4.6	4.6	4.6
Certified organic area, kt N		1.8	4.6	2.2	1.5	2.0	1.3
Reduced fertilisation subsidy, kt N		0.0	18.2	16.1	14.1	13.0	12.9
Adjusted total N quota, kt N	368	358	314	300	292	283	280
N fulfilled by manure + sewage, kt N*		140	129	119	111	105	102
N fulfilled by inorganic fertilizer, kt N-fertilizer	233	218	185	181	181	178	178
Kg N applied per ha**	139	138	127	128	129	129	129

* Amount of N, which must be counted for in the farmers nitrogen fertilizer account.

** 2024 estimate reflects the average for 2022-2024.

Table 6.10 shows the historical use of inorganic fertilizer for 2024 and the calculated use of inorganic fertilizer from 2025-2050. The total N quota is estimated as the average N supply/ha for the three latest historical years multiplied with the projected extent of the agricultural area. Based on the average N-fertilisation calculated to 139 kg N/ha (2022-2024), the total N need in 2025 is estimated to be 362 kt N. With the subtraction due to the frozen policy decisions and the assumptions for these as mentioned above, the adjusted N quota for 2025 is estimated to be 358 kt N. A part of the N need is fulfilled by applying livestock manure and sewage sludge to the soil and the remaining N need is assumed to be achieved by consumption of inorganic fertilizer, which for 2025 is calculated to 218 kt N.

A decrease in the total cultivated area leads to lower total N quota, while the decrease in livestock production lower the amount of N from manure applied to soils. The consumption of inorganic fertilizer historically goes up and down and is assumed to decrease from 233 kt N in 2024 to 178 kt N in 2050.

6.6.3 Crop Residue

The N₂O emission from crop residues is directly tied to the N content in the crop residues left in the field after harvest. The N in crop residues is calculated as the sum of N in above ground and below ground residues, subtracted the N removed in the form of straw (for feeding, bedding and fuel). The default aggregated N₂O emission factor of 0.01 kg N₂O-N per kg N in crop residues is used, corresponding to an emission factor of 1 %.

The calculation of total N in crop residues, follows the methodology of the historical inventory and is based on data for projected crop distribution, crop yields and removed straw. Factors of dry matter and N content for each crop category also follow the inventory and detailed information is available in Nielsen et al. (2026). As mentioned in 6.6.1 the overall agricultural area along with a couple of crop categories are supplied by GreenREFORM and the remaining crop categories are projected by AU-DCE based on the historical share cultivated with each crop category.

The yields are projected based on the assumption of a linear continuation of the historical trend for most of the cereals (winter wheat, rye, triticale, winter barley, spring barley) and winter rape. Yields naturally differ significantly from year to year and the trend changes annually as data from another historical year is added. The remaining crop categories are kept at the same level

for the entire projection period, set at a standard norm-level of the recent year. This norm is also based on the historical yields and affected by the annual addition of new datapoints. As described in 6.6.2 a significant reduction in the amount of N supply/ha is expected in the projections due to increased N regulation and subsidy schemes. Future yields are likely to be affected to some extent by this development and the estimates on projected yields are, not exclusively but also due to this factor, highly uncertain.

The projected of amount of straw removed from the fields for feed and bedding is based on a historical average multiplied with a factor reflecting the projected development of the livestock population. Straw for fuel purposes also follow a historical need for straw/PJ energy multiplied with the projected energy production from straw (DEA, 2025).

The major contributing crops to the emissions from crop residues are (estimated on N content in 2050); winter wheat (26 %), spring barley (16 %), catch crops (15 %), grass in rotation (14 %) and maize for animal feed (9 %). The ultimate contribution depend on the combination of extent, yields in dm and N content of the residues. Hence, the projection is mainly impacted by a reduction in the agricultural area, the crop distribution and expected yields for the projected time series. Table 6.11 show the projected N content in total and for the major contributing crops, N assumed to be removed as straw, and the projected N₂O emission related to crop residues. Emissions from crop residues are estimated to be reduced with 253 t N₂O from 2024 to 2050, corresponding to a 9 % reduction of emissions.

Table 6.11 N content of crop residues in kt N and emissions from crop residues in t N₂O.

N in crop residues, kt	2025	2030	2035	2040	2045	2050
Winter wheat	48	47	46	46	45	46
Spring barley	32	30	30	29	29	29
Catch crops	22	27	27	27	27	27
Grass in rotation	38	35	31	28	26	25
Maize for animal feed	23	20	18	17	16	15
Other crop categories	38	36	35	34	34	34
Total N content of crop residues	201	196	186	181	176	176
Total N removed as straw	14	12	11	10	9	9
Total N, kt	186	183	176	171	167	167
Total N ₂ O emission, t	2 929	2 880	2 759	2 692	2 622	2 622

6.6.4 Leaching and run-off

The N₂O emission from N-leaching and run-off is determined based on the amount of N applied to the agricultural soils from a number of sources. The projected N-leaching to the groundwater is based on projected N applied from; animal manure, grazing animals, inorganic fertilizer, sludge, other organic fertilizer, crop residue and mineralization. The total amount of nitrogen input is multiplied with the average share of N leached to the groundwater in the three latest historical years (2022-2024). This share for the current projection was set to 20.3 % which represents a nearly 10 % decrease from last year's projection. The projected N-leaching to rivers and estuaries is based on a ratio compared with the N leaching into the groundwater, also calculated as an average for the three latest historical years 2022-2024. For the current projection both were estimated between at 40-50 % to the leaching into groundwater. The N₂O emission factor is based on the default values given in IPCC 2019

Refinement of 0.006 kg N₂O-N/kg N for leaching into groundwater and 0.0026 N₂O-N/kg N for leaching into rivers and estuaries.

A reduction in N-leaching due to an increased application of catch crops is taken into account for the years 2025-2050 (Table 6.11). Based on estimates from Agency for Green Transition and Aquatic Environment (SGAV) (KEFM, 2026b), the historical extent of catch crops of 462 420 hectares in 2024 is assumed to increase to 606 270 hectares in 2027 and then kept at same level until 2050. The establishment of catch crops is assumed to reduce the N-leaching to the groundwater with 33 kg N/ha, which is based on information from SGAV (KEFM, 2026b).

In Table 6.12 is shown the background data used for calculation of the estimated N-leaching to groundwater, rivers, and estuaries.

Table 6.12 N-leaching into groundwater, rivers and estuaries from 2024-2050 in kt N.

	2024	2025	2030	2035	2040	2045	2050
N-leaching into groundwater, kt N	128	129	117	112	108	104	103
Area with catch crops, ha	462 420	486 500	606 270	606 270	606 270	606 270	606 270
Reduced N-leaching from catch crops, kt N		-1	-5	-5	-5	-5	-5
Adjusted N-leaching into groundwater, kt N		128	113	107	103	100	98
N-leaching to rivers, kt N	86	67	59	56	54	52	52
N-leaching to estuaries, kt N	66	55	48	46	45	43	42

6.7 Results

The historical greenhouse gas emission 1990-2024 is listed in Table 6.13, followed by the projected emissions for 2025-2050. The projected greenhouse gas emissions are associated with high uncertainty. Based on the available input data and assumptions emissions are expected to decrease from 11.35 million tonnes CO₂ equivalents in 2024 to 7.3 million tonnes CO₂ equivalents in 2050. Thus, a 36 % decrease of GHG emission from the agricultural sector from 2024 to 2050 is expected based on current trends and frozen policy. The decreased emission is driven by a future reduction in the number of animals and expansion of the biogas production, which lead to a decrease of both the N₂O and CH₄ emission from manure management, the use of CH₄ reducing feeding of dairy cattle and frequent removal of slurry from swine barns, which decrease emission of CH₄.

Besides the biogas production, feeding dairy cattle with Bovaer or a high level of fatty acids contribute to lower future emissions. The decrease of the emission from 2024 to 2050 can also be explained by a reduction in agricultural area and cultivated organic soils as a result of funding schemes for wetlands and afforestation and reduced use of inorganic fertilizer and lower emissions from N-leaching and run off as an effect of overall lower N inputs from e.g. extensification schemes.

Table 6.13 Total historical (1990-2024) and projected (2025-2050) emission, million t CO₂ equivalents.

Million tonnes	1990	2000	2020	2024	2025	2030	2035	2040	2045	2050
CH ₄	7.31	7.76	7.78	6.95	6.89	5.58	4.99	4.60	4.35	4.23
N ₂ O	6.58	5.31	4.78	4.22	4.14	3.57	3.28	3.12	2.97	2.90
CO ₂	0.61	0.27	0.25	0.18	0.23	0.22	0.21	0.20	0.20	0.19
Agriculture, total	14.50	13.34	12.82	11.35	11.26	9.37	8.48	7.92	7.52	7.32

6.7.1 CH₄ emission

The overall CH₄ emission has decreased slightly from 261 kt CH₄ in 1990 to 248 kt CH₄ in 2024 but is expected to decrease by 39 %, declining to 150 kt CH₄, from 2024 to 2050 (Table 6.14). The historical development has mainly been affected by a decrease of enteric fermentation. The projection shows a significant decrease in CH₄ emission from both the enteric fermentation and manure management. Both the historical and projected contribution from field burning is negligible.

The GreenREFORM model (DREAM, 2025) indicates that a decrease is expected for the number of dairy cattle from 2025 to 2050. The milk production is expected to increase all years up until 2050 (DREAM, 2025). The decrease in number of dairy cattle and changes in feeding strategy with higher ratio of fatty acids in fodder and for others supplementation of Bovaer for dairy cattle from the year 2025 and forward, are the main reasons for decrease in the CH₄ emission from enteric fermentation.

The CH₄ emission from manure management has increased from 1990 to 2023, which is a result of change in barn systems towards more slurry-based systems. From 2023 frequent removal of slurry in barns for fattening pigs is mandatory and this decreases the overall emission of CH₄ from manure management significantly. In the future, the emission from manure management is expected to decrease due to more manure being treated in biogas plants and for swine also frequent removal of slurry barns for sows and weaners. As for enteric fermentation, manure management is also reduced due to a reduced number of animals over time.

Table 6.14 Historical and projected CH₄ emissions.

kt	1990	2000	2020	2024	2025	2030	2035	2040	2045	2050
Enteric fermentation	155.0	138.8	142.4	138.4	133.4	112.8	105.5	100.1	97.4	96.5
Manure management	105.9	138.3	135.5	109.7	112.6	86.4	72.7	64.0	58.0	54.5
Field burning	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Total CH ₄ , kt	261.0	277.3	278.0	248.2	246.1	199.3	178.3	164.2	155.4	151.1

- Multiply values of the table with a GWP of 28 to calculate in CO₂e as presented in Table 6.13.

6.7.2 N₂O emission

The historical emission inventory shows a decrease of N₂O emission from 24.8 kt N₂O in 1990 to 15.9 kt N₂O in 2024, corresponding to 36 % reduction (Table 6.15). The reduction is primarily driven by a historical decrease in use of inorganic nitrogen fertilizers and related nitrous oxide emissions of 51 % because of improved utilization of nitrogen in manure, forced by environmental requirements. Amongst other N sources, this has reduced emissions from nitrogen leaching and run-off by almost the same percentage. Reductions in the area of cultivated organic soils, reduced emissions from atmospheric deposition and manure management have also contributed a good share to the historical development.

The total projected emissions are expected to decrease by 30 % until 2050, which leads to a total N₂O emission in 2050 at 11 kt N₂O. The most important future contribution is the expected continuous decrease of the area with cultivated organic soil and the decreasing projected emissions from lowering the use of inorganic fertilizers, along with reductions from manure management and animal manure applied to soils. Manure management emissions decrease mainly due to future reductions in the number of animals. Additionally, there

is also a lower N₂O emission from nitrogen leaching and run-off as related to multiple of the other N input sources. The future lower nitrogen supply is caused by a fall in the agricultural land area, schemes which promote more extensive cultivation practices with lower N inputs fertilizer and a funding scheme compensating farmers directly to reduce their N inputs.

Table 6.15 Historical and projected N₂O emissions.

kt	1990	2000	2020	2024	2025	2030	2035	2040	2045	2050
Manure management	2.55	2.63	1.90	1.44	1.49	1.1.16	0.96	0.83	0.76	0.72
Indirect N ₂ O emission	0.92	0.86	0.61	0.45	0.47	0.42	0.38	0.35	0.33	0.31
Inorganic fertilizers	6.29	3.95	3.96	3.66	3.42	2.90	2.85	2.85	2.79	2.80
Animal manure applied to soils	3.28	3.07	3.37	2.83	2.94	2.69	2.48	2.32	2.19	2.13
Sludge and other organic fertilizers applied to soils	0.07	0.14	0.16	0.18	0.19	0.18	0.17	0.17	0.16	0.16
Urine and dung deposited by grazing animals	0.23	0.20	0.10	0.09	0.09	0.09	0.08	0.07	0.07	0.07
Crop residues	2.77	2.80	3.33	2.87	2.93	2.88	2.76	2.69	2.62	2.62
Mineralization	0.69	0.37	0.21	0.34	0.22	0.18	0.15	0.13	0.11	0.07
Organic soils	2.71	2.47	1.52	1.32	1.29	0.69	0.37	0.27	0.17	0.05
Atmospheric deposition	2.04	1.23	0.95	0.90	0.86	0.79	0.75	0.71	0.68	0.68
Nitrogen leaching and run-off	3.27	2.33	1.92	1.83	1.70	1.50	1.42	1.38	1.33	1.31
Field burning	0.001	0.001	0.002	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Total N ₂ O, kt	24.81	20.04	18.05	15.92	15.62	13.49	12.38	11.77	11.21	10.93

- Multiply values of the table with a GWP of 265 to calculate in CO₂ equivalents, as presented in Table 6.13.

6.8 References

Adamsen AP (Ed.), Manevski K, Lærke PE, Larsen SU, Jørgensen U, Olesen JE, Andersen MN, Bay SS, Hutchings NJ, Hansen EM, Munkholm LJ, Børgesen CD, Thomsen IK, Elsgaard L, Petersen SO, Toda M, Ntinyari W, Sørensen P, Rasmussen C, Thers H, Audet J, Krogh PH, Bruus M, Blicher-Mathiesen G, Kronvang B, Zak D, Andersen HE, Andersen TA, Albrektsen R, Gyldenkerne S, Callisen LW, Mikkelsen MH, Winding A, Sapkota R, Jensen SS, Dalby FR, Kai P, Hansen MJ, Jensen M, Poulsen NA, Wiking L, Nørremark M, Børsting CF, Lund P, Kjeldsen MH, Maigaard M, Franchi GA, Jensen MB, Pedersen LJ, Nørgaard JV, Brask M, Leishman EM, Villumsen TM, Stephansen RB, Kristensen HL, Bouquet A, Buitenhuis A, Nielsen HM. 2025. Virkemidler til reduktion af klimagasser i landbruget – 2025. Rådgivningsrapport fra DCA – Nationalt Center for Fødevarer og Jordbrug, Aarhus Universitet. 478 sider. Leveret: 26.9.2025, Available at: https://pure.au.dk/ws/files/437605738/Rev_Levering_Opdatering_af_klimavirkemiddelkataloget_2025.pdf (March 2026).

AGD, 2024a: Aftale om et Grønt Danmark [Agreement on a Green Denmark]. Agreement between the Government, Danish Agriculture & Food Council, The Danish society for Nature Conservation (DN), The Food Association (NNF), Danish Metal, Danish Industry (DI) and Local Government Denmark (KL). 24 June 2024. Available at: [Regeringen og parterne i Grøn trepart indgår historisk Aftale om et grønt Danmark - Regeringen.dk](https://regeringen.dk/historisk-Aftale-om-et-grønt-Danmark) (February 2026).

AGD, 2024b: Aftale om Implementering af et Grønt Danmark [Agreement on implementation of a Green Denmark]. Agreement between the Government (Socialdemokratiet, Venstre og Moderaterne), Socialistisk Folkeparti, Liberal Alliance, Det Konservative Folkeparti og Radikale Venstre. 18. November 2024. Available at: <https://regeringen.dk/aktuelt/publikationer-og-aftaletekster/aftale-om-implementering-af-et-groent-danmark/> (February 2026).

AGTDA, 2021. Aftale om grøn omstilling af dansk landbrug af 4. oktober 2021 (landbrugsaftalen) [Agreement on the Green Transition for Danish Agriculture] Agreement between the Government, Venstre, Dansk Folkeparti, Socialistisk Folkeparti, Radikale Venstre, Enhedslisten, Det Konservative Folkeparti, Nye Borgerlige, Liberal Alliance og Kristendemokraterne. Available at: https://fm.dk/media/25302/aftale-om-groen-omstilling-af-dansk-landbrug_a.pdf (February 2026).

Albrektsen, R. & Mikkelsen, M.H. 2026. Danish Emission Inventories for Agriculture. Inventories 1985 - 2023. Aarhus University, DCE – Danish Centre for Environment and Energy, 265 pp. Scientific Report No. 696. Scientific report no. 696. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_600-699/SR696.pdf (March 2026).

Andersen, T.A. & Mikkelsen, M.H. 2026. DCE forudsætningsnotat vedrørende udvikling i landbrugsarealet 2025-2050 - der anvendes som grundlag for DREAM's Landbrugsfremskrivning. Aarhus Universitet, DCE – Nationalt Center for Miljø og Energi, 2026. Fagligt notat nr. 2026 | 18. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Notater_2026/N2026_18.pdf (March 2026).

ATNRM, 2025: Delaftale om overgang til ny kvælstofreguleringsmodel. [Sub-Agreement on the Transition to a new Nitrogen Regulation Model]. Agreement between the Government (Socialdemokratiet, Venstre og Moderaterne), Socialistisk Folkeparti, Liberal Alliance, Det Konservative Folkeparti og Radikale Venstre. 3. december 2025. Available at: https://mgtp.dk/Media/639003509190150480/Delaftale%20om%20overgang%20til%20ny%20kv%c3%a6lstofreguleringsmodel_endelig.pdf (March 2026).

Dalby, R.F., & Sattarova, E., Feilberg, A. 2025. Effect of frequent manure discharge on methane emission in Danish growing-finishing pig houses. Research report from DCA – Danish Centre for Food and Agriculture, Aarhus University. 14 pages. Submitted 23.04.2025. Available at: https://pure.au.dk/ws/portalfiles/portal/425587609/Effect_of_frequent_manure_discharge_on_methane_emission_in_Danish_growing-finishing_pig_houses_23042025.pdf (January 2026).

DEA, 2025: Klimastatus og fremskrivning 2025. Available at: https://www.kefm.dk/Media/638917081009383884/KEFM_KF25_200825_DEL%201.pdf (May 2026).

DEA, 2026: Projection of biogas production. Received by mail. January 2026. Danish Energy Agency.

DREAM, 2025: Fremskrivning af dansk landbrug. Dokumentationsnotat 18. november 2025. Available at: <https://dreamgruppen.dk/Media/638999158080207861/Landbrugsfremskrivning%202026.pdf> (February 2026).

DREAM, 2026: DREAM group. Economic models. GreenREFORM. Available at: <https://dreamgroup.dk/economic-models/greenreform> (March 2026).

IPCC, 2006. 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Available at: <http://www.ipcc-nggip.iges.or.jp/public/2006gl/> (March 2026).

IPCC, 2019: 2019 Refinement to 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Available at: <https://www.ipcc-nggip.iges.or.jp/public/2019rf/index.html> (March 2025).

Jensen, J. D., 2025: Fremskrivning af dansk landbrug frem mod 2050 – efteråret 2024. Department of Food and Resource Economics (IFRO), University of Copenhagen (in Danish).

Jensen, H.B., 2021: Henrik Bang Jensen. Pers. Comm. Danish Agriculture and Food Council.

Jensen, H.B., 2025: Data received from Henrik Bang Jensen per mail 31.01.2025. Danish Agriculture and Food Council.

KEFM, 2025a: Opdatering af forudsætninger til brug i Landbrugsfremskrivningen 2026 jf. Aftale om et grønt Danmark. Projekttilskud til udtagning af lavbundsjord (SGAV) samt Anlægsbevilling til udtagning af lavbundsjord (NST). + Permanent ekstensivering (SGAV). Received per mail 07.10.2025 (in Danish).

KEFM2025b: Opdatering af forudsætninger til brug i Landbrugsfremskrivningen 2026 jf. Aftale om et grønt Danmark. Ny skovrejsning (SGAV). Received per email 02.10.2025.

KEFM, 2026a: Forudsætninger til KEFM's og DCE's brug i Klimafremskrivningen 2026 (KF26). Tilskud til yderligere anvendelse af metanreducerende foder (MGTP). Received per mail 13.01.2026 (in Danish).

KEFM 2026b: Forudsætninger til KEFM's og DCE's brug i Klimafremskrivningen 2026 (KF26). Måltrettet kvælstofregulering, pligtige- og husdyrefterafgrøder samt efterafgrøder udenfor ordning (SGAV) – samme som til KF25. Received per mail 06.02.2026. (in Danish)

KEFM 2026c: Confirmed no changes to frequent removal of slurry for projection 2026. Ministry of Climate, Energy and Utilities. By mail 22.01.2026.

Kristensen, T. & Lund, P., 2016: Fordeling af kvæg i kategorier. Aarhus University, DCA – Danish Center for Food and Agriculture.

LOV nr. 1057 af 30/06/2020. Lov om ændring af lov om naturbeskyttelse (Forbud mod sprøjtning, gødskning og omlægning af § 3-beskyttede arealer). Available at: <https://www.retsinformation.dk/eli/lta/2020/1057> (March 2024).

Lund, P. 2025. Prædiktion af udskillelse af kvælstof hos konventionelle og økologiske malkekøer i 2030, 2035, 2040 og 2050 på baggrund af data fra DREAM-modellen for 2025, data fra ydelseskontrollen 2024/2025 og NORM-TALS-modellen for 2025/2026. 20 sider. Rådgivningsnotat fra DCA – Nationalt Center for Fødevarer og Jordbrug, Aarhus Universitet, leveret: 17. december 2025.

Lund, P., Hellwing, A.L.F., Brask, M.J., Weisbjerg, M.R. 2025. Fremskrivning af metanomdannelsesfaktoren (Y_m) for malkekøer frem mod 2050. 17 sider. Rådgivningsnotat fra DCA – Nationalt Center for Fødevarer og Jordbrug, Aarhus Universitet, leveret: 17. december 2025.

Mikkelsen, M.H., Albrechtsen, R. & Gyldenkerne, S. 2016: Biogasproduktions konsekvenser for drivhusgasudledning i landbruget. Aarhus Universitet, DCE – Nationalt Center for Miljø og Energi, 41 s. - Videnskabelig rapport fra DCE – Nationalt Center for Miljø og Energi nr. 197. Available at: <http://dce2.au.dk/pub/SR197.pdf> (April 2024).

MIM, 2024: Forudsætninger til KEFM's og DCE's brug i Klimafremskrivningen 2025 (KF25). Hyppig udslusning i svinestalde (MGT). Danish Ministry of Environment. Received per mail 21.10.2024 (in Danish).

MGT, 2026: Forudsætninger til KEFM's og DCE's brug i Klimafremskrivningen 2026 (KF26), notat vedrørende Tilskud til gødningsreduktion (MGTP). (In Danish). Ministry of Green Transition. Received per email January 2026.

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrechtsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Callisen, L.W., Andersen, T.A., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott-Bentsen, N., Rasmussen, E., Petersen, S.B., Baunbæk, L., & Hansen, M.G. 2025. Denmark's National Inventory Document 2025. Emission Inventories 1990-2023 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE – Danish Centre for Environment and Energy, 929 pp. Scientific Report No. 655. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_600-699/SR655.pdf (March 2026).

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Mikkelsen, M.H., Nielsen, M., Gyldenkerne, S., Fauser, P., Albrechtsen, R., Hjelgaard, K.H. & Bruun, H.G. 2025b. Annual Danish Informative Inventory Report to UNECE. Emission inventories from the base year of the protocols to year 2023. Aarhus University, DCE – Danish Centre for Environment and Energy, 645 pp. Scientific Report No. 651. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_600-699/SR651.pdf (March 2026).

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrechtsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Andersen, T.A., Tougaard, S. L., Arendal, L. S. H., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott-Bentsen, N., Baunbæk, L., & Hansen, M.G. 2026. Denmark's National Inventory Document 2026. Emission Inventories 1990-2024 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE – Danish Centre for Environment and Energy, 790 pp – In process of publication. Available at: https://dce.au.dk/fileadmin/dce.au.dk/Udgivelser/Videnskabelige_rapporter_700-800/SR706.pdf (September 2026).

Nørgaard, J.V., Hellwing, A.L.F. 2025. Fremskrivning af grises N-udskillelse fra dyr, stald og lager fra 2024 til år 2050 - Landbrugsfremskrivningen 2025. Rådgivningsnotat fra DCA – Nationalt Center for Fødevarer og Jordbrug, Aarhus Universitet. 12 sider. (in Danish) Leveret: 17.12.2025.

SEGES, 2025: SEGES input til klimastatus og -fremskrivning 2026 – forudsætninger for fremskrivning af emissioner fra landbruget. (in Danish). Received by email. December 2025.

SGAV, 2026. List of Environmental Technologies. Danish Agricultural Agency. Available at: <https://en.lbst.dk/agriculture/environmental-technologies-for-livestock-holdings/list-of-environmental-technologies> (March 2026).

7 Waste

In the Danish emission inventories, emissions from waste are divided into five main groups of sources: 5.A Solid waste disposal, 5.B Biological treatment of solid waste, 5.C Incineration and open burning, 5.D Wastewater treatment and discharge and 5.E Other.

7.1 Emission overview

Table 7.1 gives an overview of historic and projected emissions from the waste sector. 5.B Biological treatment of solid waste has been divided in the two sources 5.B.1 Composting and 5.B.2 Anaerobic digestion at biogas facilities and 5.D Wastewater, has been divided into treatment and discharge.

Table 7.1 Greenhouse gas emissions from the waste sector for chosen years in the time series, kt CO₂ equivalents.

	1990	2000	2010	2020	2024	2025	2026	2030	2035	2040	2045	2050
5.A Solid waste disposal	1272	697	360	255	212	216	210	191	173	161	155	153
5.B.1 Composting	37	93	108	118	116	130	128	126	127	128	129	130
5.B.2 Anaerobic digestion at biogas facilities	6	34	74	318	450	465	467	583	656	673	673	673
5.C Incineration and open burning	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
5.D Wastewater treatment	272	229	196	214	207	175	176	178	182	186	187	187
5.D Wastewater discharge	169	40	23	16	18	31	31	31	31	31	31	31
5.E Other	24	24	22	21	18	19	19	19	19	19	19	19
Total	1781	1116	785	941	1021	1035	1031	1129	1189	1198	1193	1193
Share of national emissions excl. LULUCF	2%	2%	1%	2%	3%	3%	3%	4%	6%	7%	8%	8%

Further information is available for each sub-sector in the following sections.

7.2 Solid waste disposal on land

The source category *5.A Solid waste disposal*, only gives rise to emissions of one greenhouse gas; i.e. CH₄ emissions.

The CH₄ emission is calculated by means of a First Order Decay (FOD) model equivalent to the IPCC Tier 2 methodology (Nielsen et al., 2026). The model calculations are performed using national statistics on landfill waste categories reported in the national waste statistics. The waste amount reported or estimated for the historical time series since 1940, are grouped into 20 waste types (10 degradable and 10 inert) with individual content of degradable organic matter and degradation kinetics expressed as half-lives (Nielsen et al., 2026).

7.2.1 Emission model

The model has been developed and used in connection with the historic emission inventories prepared for the United Nation Climate Convention. As a result, the model has been developed in accordance with the guidelines found in the IPCC Guidelines (2006). Based on the recommendations in these guidelines, a so-called Tier 2 method, a decay model, has been selected. The model is described in the National Inventory Document, which is prepared for the Climate Convention, the latest being the 2026 NID report (Nielsen et al., 2026). In short, the degradation and release of methane is modelled according to waste type specific content of degradable organic matter and degradation

rates assuming FOD kinetics. For a detailed description of the model and input parameters, the reader is referred to Nielsen et al. (2026).

CH₄ emissions for the projected years 2025-2050 are calculated using the same FOD model as used for calculation of historical emissions. The same DOCs, half-lives and historical waste amounts (since 1940) are also applied for historical and projected years, for more information on these factors, the reader is referred to Nielsen et al. (2026).

7.2.2 Activity data, input

Deposited amounts of waste

It is relevant in this context to distinguish between organic and inert waste types, as only organic waste is degradable and thereby a source of CH₄ emissions. Of the 20 waste types prepared for the FOD model, only 10 are degradable. For more information in the deposited amounts of inert waste, the reader is referred to Nielsen et al. (2026).

Historically, the total amount of organic waste deposited at landfills increased from 1940 to the mid 1980's followed by a rather steep decrease. Since 2013, deposited organic waste amounts have reached a more constant level at 105-137 kt (48-74 kt excl. demolition waste).

Deposited total waste amounts for 2025-2050 are projected by DEPA (2026). The deposited amounts of the individual waste fractions are estimated from total deposited waste amounts and the average waste composition of the latest five historic data year, i.e. 2020-2024. This implies that 27.5 % of the deposited amounts estimated by DEPA (2026) is categorised as organic, i.e. comprised by waste types with a content of organic degradable carbon (DOC_i>0). This fraction consists mainly of demolition waste (55 %), food waste (13 %) and paper & cardboard (6 %).

Figure 7.1 presents the deposited organic waste for 1990-2050. The FOD model calculations also include waste amounts deposited in 1940-1989.

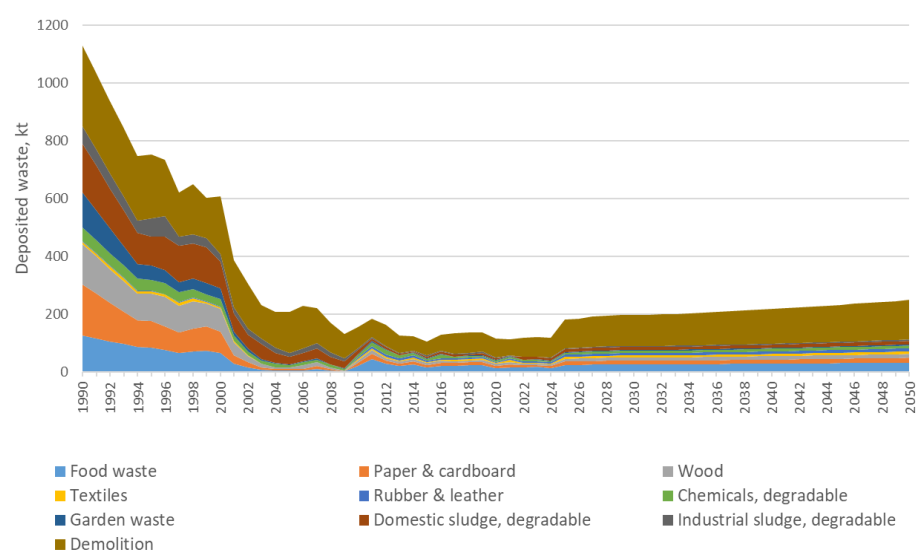


Figure 7.1 Deposited amounts of organic waste divided into 10 organic waste fractions.

The reason for the sharp decrease in historical data on deposited amounts of organic waste is to be found in a combination of the Danish waste strategies

and action plans, including goals for a continued minimising of the amount of deposited waste in favour of an increased reuse and combustion for energy production. From the last historical year (2024) to the first projected year (2025), the total amount of waste being landfilled increases by 21 % (54 % for organic waste) and is projected to increase by another 38% from 2025-2050 (DEPA, 2026).

Amount of recovered methane

The amount of recovered methane was estimated based on information from the Danish Energy Agency (2026) stating that the amount of recovered methane is projected to be 0.07-0.08 PJ per year in the period 2025-2050 (Table 7.2 and Figure 7.2).

7.2.3 Activity data and emissions, output

Table 7.2 and Figure 7.2 show the results of the FOD model calculations for 1990-2050.

Table 7.2 Historical and projected amounts of deposited waste, generated methane, recovered methane collected for biogas production, oxidised methane in the top layer and resulting net emission for the Danish SWDS.

	Deposited organic waste	Annual deposited generation potential	Gross methane emission	Recovered methane	Methane oxidised in the top layers	Net methane emission	
	kt	kt CH ₄	kt CH ₄	kt CH ₄	kt CH ₄	kt CH ₄	kt CO _{2e}
1990	1128	52.0	51.0	0.5	5.0	45.4	1272
1995	753	30.1	46.0	7.6	3.8	34.6	968
2000	608	23.5	38.9	11.3	2.8	24.9	697
2005	208	2.7	28.3	9.9	1.8	16.6	464
2010	155	4.5	20.0	5.7	1.4	12.9	360
2015	105	3.5	15.8	3.2	1.3	11.4	318
2020	115	2.9	12.6	2.5	1.0	9.1	255
2024	117	3.0	10.4	2.0	0.8	7.6	212
2025	181	5.1	9.9	1.4	0.9	7.7	216
2026	184	5.2	9.7	1.4	0.8	7.5	210
2030	197	5.6	9.0	1.4	0.8	6.8	191
2035	204	5.8	8.3	1.4	0.7	6.2	173
2040	217	6.1	7.8	1.4	0.6	5.8	161
2045	232	6.5	7.5	1.4	0.6	5.5	155
2050	249	7.0	7.5	1.4	0.6	5.5	153

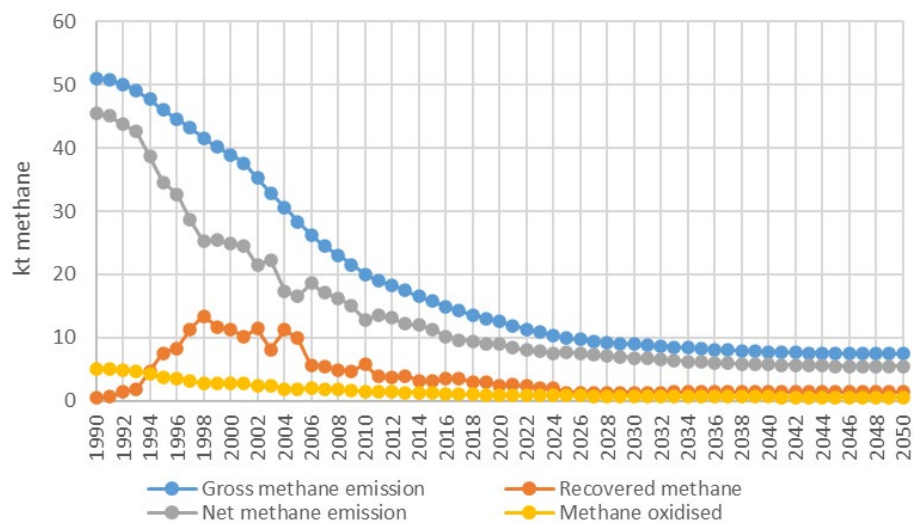


Figure 7.2 Historical and projected methane emissions. Historic data: 1990-2024. Projections: 2025-2050, kt.

In the period 2024-2050, the annual net methane emission reduces from 212 to 153 kt CO₂ equivalents, corresponding to a reduction of 28 %.

It should be mentioned that the impact of implementing the Biocover instrument has not been included in the projected methane emissions (BEK nr. 752 af 21/06/2016). Work is ongoing to document the effect with the aim of including this in future projections.

Due to the nature of the decay model, each annual emission is the sum of partial degradation of waste deposited in all prior years, back to 1940. To illustrate the impact on today's emissions from waste deposited decades ago, the model calculations were split into four periods as presented in Table 7.3.

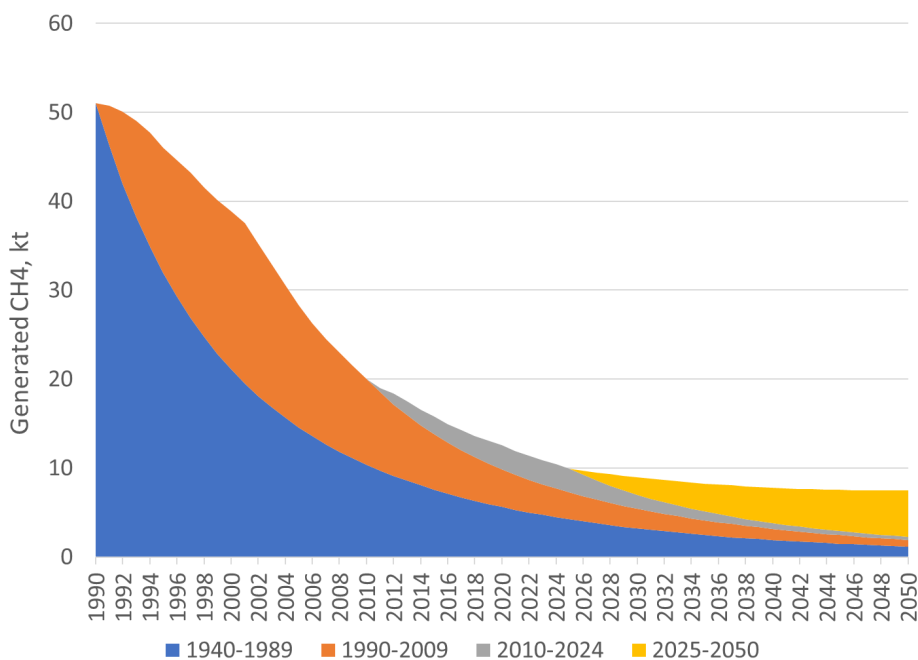


Figure 7.3 Methane generated from waste deposited in different periods.

In 2024, 43 % of the generated methane was caused by waste deposited before 1990. In 2050, this same waste (i.e. deposited in 1940-1989) still contributes with 15 % of the total generated methane.

7.3 Biological Treatment of Solid Waste

The Danish greenhouse gas emission from source category 5.B Biological treatment of solid waste, consists of sub-category 5.B.1 Composting, and 5.B.2 Anaerobic digestion of organic waste.

7.3.1 Composting

In Denmark, composting of solid biological waste includes composting of:

- Garden waste
- Sludge
- Other organic waste
- Home composting of garden and vegetable food waste

Emissions from composting are calculated according to a country specific Tier 2 method for garden waste, sludge and organic waste and Tier 1 for home composting. Applied emission factors are a combination of country specific and default values.

Methodology

The activities of garden waste, sludge and other organic waste for composting have been projected by DEPA (2026). These data project waste amounts for total reuse (composting, biogas production and application to agricultural land) with the assumption that the allocation of waste between the three types of reuses are constant in the projection period. The activity of home composting is projected to increase slightly, following the population projection of Statistics Denmark (2026). All emission factors are kept constant throughout the time series 1990-2050.

Emission factors

By assuming that the process of compost production will not significantly change over the next 25 years, the emission factors applied for this projection are the same as is used for historic years in Nielsen et al. (2026).

Table 7.3 Emission factors for compost production, t per kt wet weight.

	Garden waste	Organic waste	Sludge	Home composting
CH ₄	2.57	4.00	0.29	2.78
N ₂ O	0.15	0.24	0.09	0.09

Activity data and emissions

The projection of composting was performed individually for the four waste types. Table 7.4 presents activity data and calculated emissions for selected years in the time series 1990-2050.

Table 7.4 Historical and projected amounts of composted waste and emissions of CH₄, N₂O and CO₂e, kt.

Year	Garden waste	Organic waste	Sludge	Home composting	CH ₄	N ₂ O	CO ₂ e
1990	288	16	5	20	0.86	0.05	37.2
1995	376	40	7	21	1.19	0.07	51.4
2000	677	47	218	21	2.05	0.13	92.9
2005	737	45	50	22	2.15	0.13	94.0
2010	808	76	74	23	2.47	0.15	108.4
2015	859	87	197	23	2.68	0.17	119.8
2020	881	63	194	24	2.64	0.17	118.0
2024	809	71	343	24	2.53	0.17	116.2
2025	841	109	456	24	2.80	0.19	130.0
2030	822	103	451	24	2.72	0.19	126.5
2035	820	103	477	25	2.73	0.19	127.3
2040	815	105	515	25	2.73	0.20	128.2
2045	807	108	555	25	2.74	0.20	129.1
2050	800	112	597	25	2.75	0.20	130.4

7.3.2 Anaerobic digestion at manure-based biogas plants

Biogas production in this sector covers emissions from the handling of biological waste including bio-waste and manure digested at biogas plants.

The energy production at biogas plants within the agricultural sector accounts for 97 % of the biogas production included here. The biogas production is projected by the Danish Energy Agency (2026) and is estimated to increase from 31.9 PJ in 2025 reaching a maximum level of 46.2 PJ in 2040 after which remaining constant in 2040-2050. The CH₄ emission is calculated using an emission factor of 4.2% of the CH₄ content in the produced biogas in the period 1990-2016, 2.9 % for 2020 and 2.6 % for 2024-2050. Emission factors for intermediate years are interpolated. For more information, please refer to Nielsen et al. (2026).

Historical and projected emissions are provided in Table 7.5 and visualised in Figure 7.4.

Table 7.5 Historical and projected energy production, and emissions of CH₄ and CO₂e.

Year	Biogas production, TJ	CH ₄ production, kt	CH ₄ emission, kt	CO ₂ e, kt
1990	266	5.3	0.2	6.2
1995	746	14.8	0.6	17.4
2000	1442	28.6	1.2	33.6
2005	2375	47.1	2.0	55.4
2010	3184	63.2	2.7	74.3
2015	5111	101.4	4.3	119.3
2020	19725	391.4	11.3	317.8
2024	30940	613.9	16.1	450.4
2025	31917	633.3	16.6	464.6
2030	40047	794.6	20.8	582.9
2035	45101	894.9	23.4	656.5
2040	46224	917.1	24.0	672.8
2045	46210	916.9	24.0	672.6
2050	46210	916.9	24.0	672.6

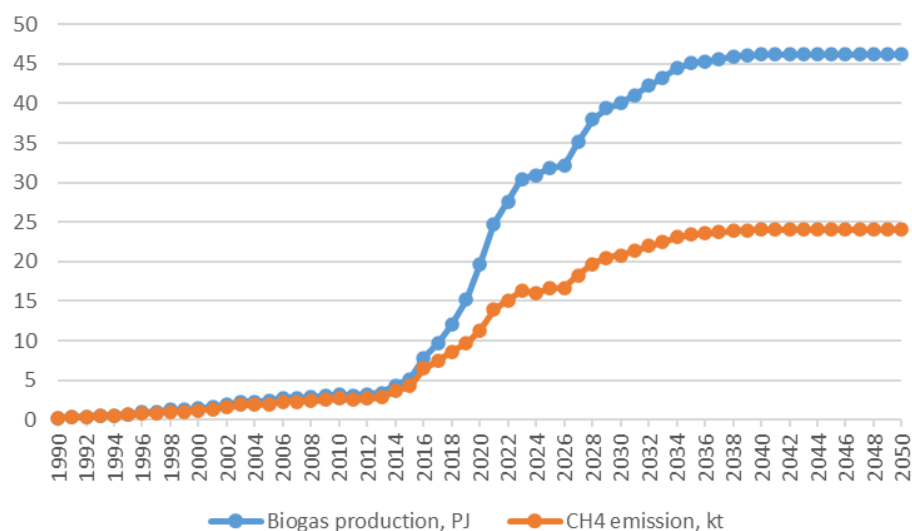


Figure 7.4 Historical and projected amounts of bioenergy and CH₄ emissions. Historic data: 1990-2024. Projections: 2025-2050.

7.4 Waste Incineration

The source category *5.C Waste Incineration* includes cremation of human bodies and cremation of animal carcasses and gives rise to CH₄ and N₂O emissions.

Incineration of municipal, industrial, clinical and hazardous waste takes place with energy recovery; the emissions are therefore included in the relevant sub-sectors under the Energy sector (*1.A Stationary combustion*). For documentation, please refer to Chapter 2 of this report. Flaring offshore and in refineries are included under sub-sector 1.B.2c, for documentation please refer to Chapter 3 of this report. No flaring in chemical industry occurs in Denmark.

As presented in Table 7.1, greenhouse gas emissions from the Waste Incineration sub-sector are miniscule.

7.4.1 Activity data

It is assumed that no drastic changes are made in the subject of human- and animal cremation that will influence greenhouse gas emissions in the years until 2050.

Table 7.6 presents the number of deceased persons and number of human cremations together with the amount of cremated carcasses.

In this year's emission projection, a constant level of cremations is chosen for both human and animal cremations, corresponding to the respective average value of the last three historical years.

Table 7.6 Activity data for waste incineration.

	Deceased humans	Human cremations	Animal cremations
	no.	no.	tonnes
1990	60926	40991	150
1995	63127	43847	200
2000	57998	41651	443
2005	54962	40758	762
2010	54368	42050	1449
2015	52555	43238	1119
2020	54645	46910	995
2024	57071	50191	847
2025		50706	864
2030		50706	864
2035		50706	864
2040		50706	864
2045		50706	864
2050		50706	864

7.4.2 Emission factors

The applied emission factors for cremations are the same for all years in the time series 1990-2050, for more information please refer to Nielsen et al. (2026).

Table 7.7 Emission factors for waste incineration.

	Human cremation		Animal cremation	
	Value	Unit	Value	Unit
CH ₄	11.8	g/body	0.18	kg/t
N ₂ O	14.7	g/body	0.23	kg/t

7.4.3 Emissions

Figure 7.5 presents greenhouse gas emission from the waste incineration sub-sector, divided in contributions from the two sources and two pollutants.

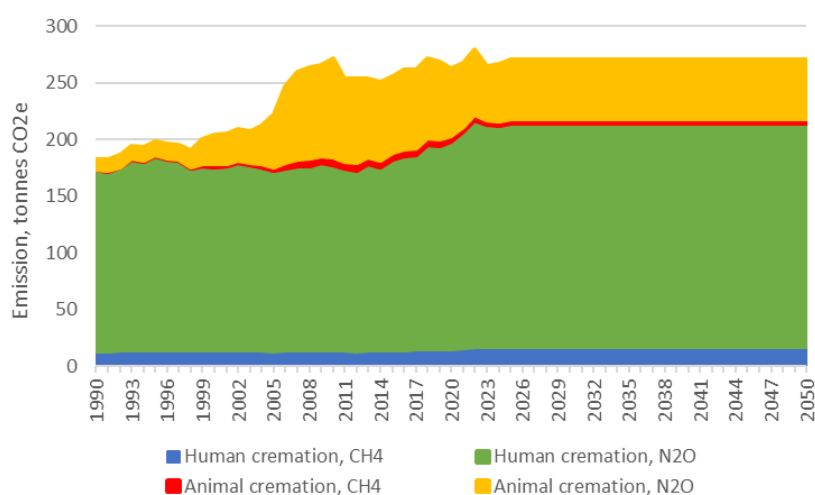


Figure 7.5 Emissions from waste incineration.

7.5 Wastewater handling

The source category 5.D Wastewater handling constitutes emissions of CH₄ and N₂O from wastewater treatment and from discharge in both the residential/commercial and industrial sectors. Emissions from the part of the Danish population not connected to the sewer system is also included.

7.5.1 Methodology

The following contributions to the wastewater sub-sector are included in the Danish greenhouse gas inventories and projections:

- CH₄ from anaerobic treatment plants (5D1a)
- CH₄ from municipal wastewater treatment and sewers (5D1b)
- CH₄ from septic tanks (5D1c)
- CH₄ from discharge (5D1d+5D2d)
- N₂O from wastewater treatment (5D1b+5D2b)
- N₂O from discharge (5D1d+5D2d)

For a detailed description of the model equations and input parameters (process-specific emissions factors and activity data) the reader is referred to Nielsen et al. (2026).

All activity and emission data are presented in Table 7.8.

Methane emission from anaerobic digestion

The net methane emission from anaerobic treatment processes of sludge in closed systems with biogas extraction for energy production is estimated from the gross energy production leakage rate (6.9 %), based on measured data at biogas facilities at wastewater treatment plants (Nielsen et al., 2026) and the biogas production (available from DEA, 2026). The energy production at biogas facilities is measured for historic years (available from the national Energy Statistics) and projected for 2025-2050 (available from the Energy and Climate Outlook), both datasets are produced by the Danish Energy Agency (DEA).

Methane emission from sewers and municipal wastewater treatment

The fugitive emissions from the sewer system, primary (and secondary) settling tanks (clarifiers) and aerobic biological N and P removal processes, are estimated from the influent organic degradable matter measured as the chemical oxygen demand (COD) in the influent wastewater flow and the default maximum CH₄ producing capacity, i.e. 0.25 kg CH₄ per kg COD (IPCC, 2006).

The fraction of total organically degradable carbon in wastewater (COD) that is unintentionally converted to CH₄ in sewers and treatment processes, is set equal to 0.003 based on a country specific expert judgement (Nielsen et al., 2026). The resulting emission factor for these processes therefore equals 0.75 g CH₄ per kg COD in the inlet wastewater.

The projection calculations are made from the average COD (t per inhabitant) for the three latest historic years (2022-2024) and the projected population from Statistics Denmark (2026).

Methane emission from septic tanks

For the part of the population not connected to the collective sewer system, simple decentralised wastewater handling is assumed and modelled as septic tanks. The methane emission is calculated from the population number, an emission factor for septic tanks and the fraction of the population that is not connected to the sewer system, i.e. scattered houses.

Data on historic and projected population numbers and historic data on housing types are available from Statistics Denmark (2026). The population fraction outside the sewer system is a time series that steadily decreases from 11.5 % in 1990 to 6.9 % in 2024, this fraction is kept constant at 6.9 % for the

projection calculations; 2025-2050. The country specific emission factor of 2.54 kg CH₄ per person per year and is kept constant for the entire time series 1990-2050.

Methane emissions from discharge

The fugitive CH₄ emission from effluent wastewater includes discharge from both:

- Domestic wastewaters (5D1d), including effluents from municipal wastewater treatment plants, rain related effluents and effluents from scattered houses not connected to the sewage system.
- Industrial wastewater (5D2d), including effluents from wastewater treatment plants at separate industries and effluents from aquaculture.

Emissions are based on the effluent organic degradable matter measured as the chemical oxygen demand (COD) in the effluent wastewater flow. Applied emission factors are the default maximum CH₄ producing capacity, i.e. 0.25 kg CH₄ per kg COD (IPCC, 2019) and the fraction of DOC that is released at discharge in waterbodies, i.e. 0.11 (IPCC, 2019).

The effluent COD is available for each of the five contributions mentioned above, these are summed into domestic- and industrial wastewater streams and emissions are calculated separately for the two streams. The emission factor for discharge regardless of whether the effluent wastewater is from domestic or industrial sources, equals 27.5 g CH₄ per kg COD. (Nielsen et al., 2026).

For domestic wastewater discharge, projections are calculated from the average COD per inhabitant from the latest three historic years and population projections from Statistics Denmark (2026).

For industrial wastewater discharge, projections are estimated as the constant average of the latest three historic years.

Nitrous oxide emission from wastewater treatment

The N₂O emission from wastewater treatment processes is calculated from the annually reported influent N load flow of either domestic or industrial wastewater and an emission factor of 13.2 kg N₂O per tonne N load in the influent wastewater (Nielsen et al., 2026).

Projections for municipal wastewater treatment are estimated from population projections and the average N load per capita for the latest three historical years. For industrial sources, the N₂O emission is projected as the constant average of the latest three historical years.

Nitrous oxide emission from discharge

The fugitive N₂O emission from effluent wastewater includes discharge from both:

- Domestic wastewaters, including effluents from municipal wastewater treatment plants, rain related effluents and effluents from scattered houses not connected to the sewage system
- Industrial wastewater, including effluents from wastewater treatment plants at separate industries and effluents from aquaculture

Emissions are calculated from the effluent sewage nitrogen load and an emission factor of 7.9 kg N₂O per tonne N load in the effluent wastewater (IPCC, 2019).

The effluent nitrogen load is available for each of the five contributions mentioned above, these are summed into domestic- and industrial wastewater streams and emissions are calculated separately for the two streams.

Projections of effluent emissions from domestic wastewater are calculated from population projections and the average N per capita for the latest three years. While projections of effluent emissions from industrial wastewater are estimated as the constant average emissions from the latest three historic years.

7.5.2 Emissions

Activity data are presented in the following Table 7.8, along with historical and projected greenhouse gas emissions from wastewater treatment and discharge. Emissions are also presented graphically in Figure 7.6.

Table 7.8 Activity data and emissions from wastewater treatment and discharge.

	Unit	1990	2000	2010	2015	2020	2024	2025	2030	2035	2040	2045	2050
Population	1000s	5135	5330	5535	5660	5823	5961	5993	6048	6118	6168	6199	6216
Biogas prod. from WWTP	TJ	458	857	840	1002	1293	1153	657	718	783	845	845	845
5D1a Emission, anaerobic TPs	kt CH ₄	0.61	1.14	1.11	1.33	1.71	1.53	0.87	0.95	1.04	1.12	1.12	1.12
Influent TOW at municipal TPs	kt COD	349	390	370	387	388	385	384	388	392	395	397	398
5D1b Emission, sewers and municipal WWT	kt CH ₄	0.26	0.29	0.28	0.29	0.29	0.29	0.29	0.29	0.29	0.30	0.30	0.30
Population not connected to sewage system	-	12%	11%	9%	9%	7%	7%	7%	7%	7%	7%	7%	7%
5D1c Emission, septic tanks	kt CH ₄	1.50	1.45	1.32	1.22	1.09	1.05	1.06	1.07	1.08	1.09	1.09	1.09
Effluent TOW from domestic sources	kt COD	72.2	22.5	20.5	24.7	15.5	19.4	17.9	18.1	18.3	18.5	18.6	18.6
5D1d Emission, domestic effluent	kt CH ₄	1.99	0.62	0.56	0.68	0.43	0.53	0.49	0.50	0.50	0.51	0.51	0.51
Effluent TOW from industry	kt COD	154.0	24.4	12.6	7.3	4.8	4.8	4.9	4.9	4.9	4.9	4.9	4.9
5D2d Emission, industrial effluent	kt CH ₄	4.24	0.67	0.35	0.20	0.13	0.13	0.14	0.14	0.14	0.14	0.14	0.14
Total CH ₄ emission	kt CH ₄	8.59	4.17	3.62	3.72	3.65	3.53	2.84	2.94	3.05	3.15	3.16	3.16
Influent N load at municipal TP	kt	33.2	31.7	27.4	30.5	30.3	30.6	30.2	30.5	30.8	31.1	31.2	31.3
5D1b Emission, sewers and municipal WWT	t N ₂ O	438.7	418.0	361.1	402.7	400.3	403.7	398.2	401.9	406.5	409.9	411.9	413.1
Influent N load at industries	kt	9.7	5.8	2.6	2.7	2.6	1.3	2.0	2.0	2.0	2.0	2.0	2.0
5D2b Emission, industrial WWT	t N ₂ O	128.0	76.6	34.1	36.0	34.8	17.4	27.0	27.0	27.0	27.0	27.0	27.0
Effluent N load from municipal WWT	kt	15.4	4.7	3.6	3.7	3.2	3.8	3.5	3.6	3.6	3.6	3.7	3.7
other domestic sources	kt	2.9	1.7	1.7	2.3	1.4	1.9	1.7	1.7	1.7	1.7	1.7	1.7
Emission, municipal WWT eff.	t N ₂ O	120.8	36.6	28.1	29.1	25.5	30.2	27.8	28.1	28.4	28.6	28.8	28.8
Emission, other domestic eff.	t N ₂ O	22.8	13.7	13.1	18.0	10.9	15.0	13.2	13.2	13.2	13.2	13.2	13.2
5D1d Emission, domestic effluent	t N ₂ O	143.6	50.3	41.2	47.1	36.4	45.3	41.0	41.2	41.5	41.8	41.9	42.0
Effluent N load from industry	kt	6.0	3.6	1.3	1.4	1.2	1.1	1.1	1.1	1.1	1.1	1.1	1.1
5D2d Emissions, industrial effluent	t N ₂ O	47.5	28.4	10.0	10.7	9.8	8.3	8.3	8.3	8.3	8.3	8.3	8.3
Total N ₂ O emission	kt N ₂ O	0.76	0.57	0.45	0.50	0.48	0.47	0.47	0.48	0.48	0.49	0.49	0.49
Total CO ₂ e emission	kt CO ₂ e	441.3	268.7	219.7	235.8	229.8	224.7	205.4	209.2	213.5	217.1	218.0	218.5

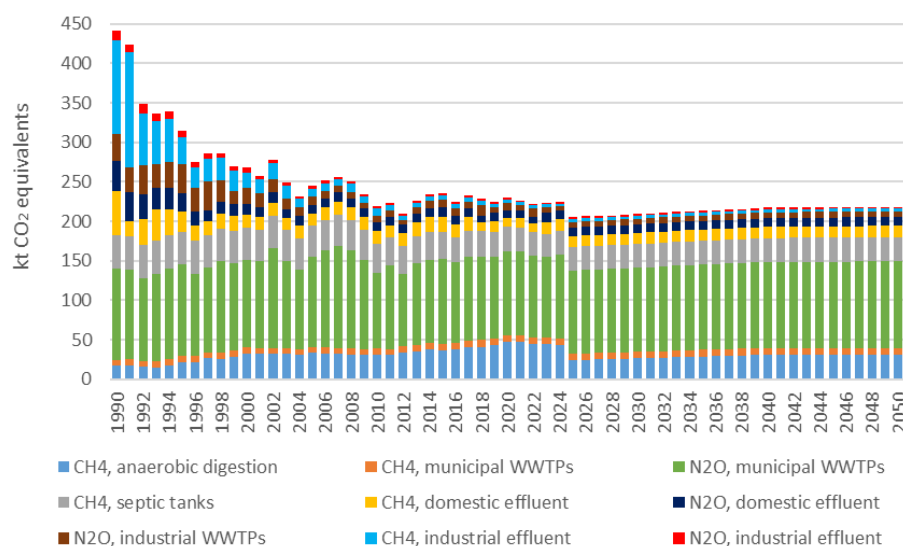


Figure 7.6 CO₂ equivalent emissions from wastewater handling, kt CO₂e.

Greenhouse gas emissions from effluents are slightly higher than all wastewater treatments combined in 1990, for all other years (1991-2050), emissions are higher for treatment than for effluent. Effluent emissions quickly decrease in the 1990s due to improvements in the wastewater treatment efficiencies and are below 20 % of the total greenhouse gas emission from the wastewater sector since 2001.

The projected total emissions from the wastewater sector shows a slight increase that is driven primarily by the expected increase in biogas production at wastewater treatment plants, but also by the general increase in population.

7.6 Other

The source category 5.E Waste Other is a catch up for the waste sector. Emissions presently included in this category are CO₂ and CH₄ emissions from accidental building and accidental vehicle fires.

Activity data for accidental fires are calculated from the registered number of fires available from The Danish Emergency Management Agency. Registered fires are categorised in five building types and 13 vehicle types and also in four sizes (small-, medium-, large- and full-scale fires). By using average building floor area and average vehicle weight data from Statistics Denmark along with average building mass per floor area factors, the total amount of combusted mass is calculated for all historical years. Emission factors for building fires and vehicle fires are known from international literature.

Emissions from accidental fires were projected as the average emission of the last three historical years.

Historical and projected non-biogenic greenhouse gas emissions are presented in Figure 7.7.

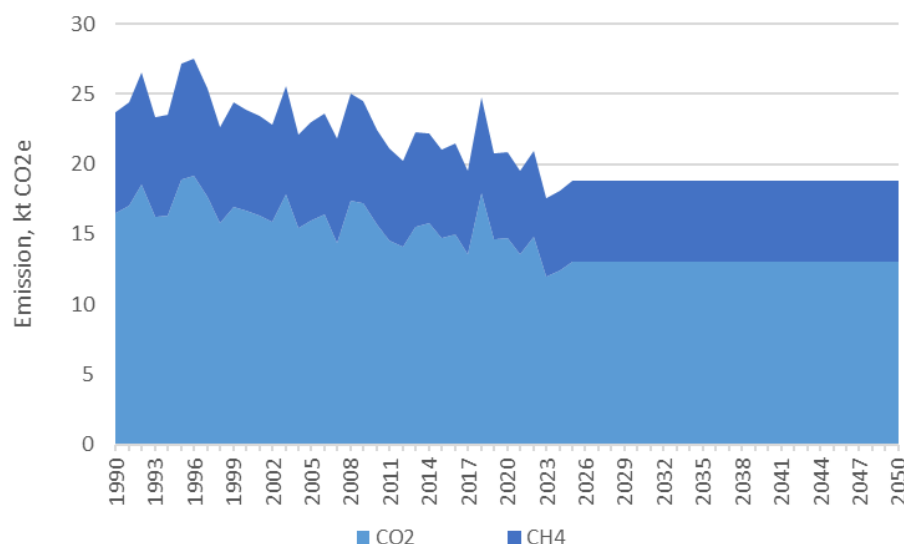


Figure 7.7 Greenhouse gas emissions from accidental fires.

7.7 Source specific recalculations

Projected emissions in this report are not the same as last year's projections, as the calculations of both historic and projected emissions are ongoing and continuously altered to match current available knowledge.

For 5A Solid waste disposal, several changes were made to the calculation of methane emissions. The most significant change comes from the introduction of DOC_f^{14} constants from IPCC (2019) to the calculation model, that varies with the different waste fraction. In last year's submission, DOC_f was 0.5 for all waste fraction, now DOC_f varies from 0.1 for e.g. wood to 0.7 for e.g. food waste. This improvement in the model affects both the historic and projected emissions. Other recalculations made to the model and historic data only have minor impact on the projections (less than 0.5 kt CH_4 in most recent historic years). The projection by DEPA of waste for disposal on land, shows an increase in total waste amounts (excl. soil) of 10-18 % per year for 2025-2050 compared to last year's emission projections. The overall change in emissions from solid waste disposal is a decrease between 4.4 kt CH_4 (2050) and 6.3 kt CH_4 (2025), corresponding to 45-46 % for each year.

For category 5B Biological treatment of solid waste, recalculations were made for both source categories. For composting, new data are available from DEPA for both historic years and projections years 1990-2023 were made for composting due to updated data from DEPA. The resulting change in expected emissions from composting have decreased because of this; between 4 kt CO_2e (-3 %) in 2025 and 12 kt CO_2e (-9 %) in 2029. For anaerobic digestion of organic waste at biogas facilities, the projected biogas production prepared by DEA (2026), has decreased with up to 11 % (2026) compared to last year's projection. Also, new measurements from 2025 show a lower methane leakage rate than earlier measurement campaigns, as a result, the emission factor is lowered from 2.9 % to 2.6 % leakage for the years 2024-2050. The overall methane emission from 5B Biological treatment of solid waste has decreased between 89 kt CO_2e (-10 %) in 2040-2050 and 143 kt CO_2e (-16 %) in 2031.

¹⁴ DOC_f is the fraction of the degradable organic carbon that will decompose at the disposal sites.

For category 5C Incineration and open burning of waste, there are no changes in the historic emission inventory. The average of the three latest historical years is applied in the emission projection, resulting in a slight decrease in emissions of 0.4 t CO₂e (-0.1 %) per year in the projections period 2025-2050.

No major changes were made for category 5D Wastewater treatment and discharge. Biogas projection data from DEA and population projection data from Statistics Denmark were updated and calculations applying e.g. TOW per capita data were updated to latest historical years. The overall recalculation in greenhouse gas emissions from wastewater treatment and discharge are decreases between 1 kt CO₂e per year (-1 %) in 2040-2050 and 4 kt CO₂e per year (-2 %) in 2027-2035.

For the category Other, since the emissions are projected as the average of the three latest historical years, emissions for 2025-2050 changed slightly. The recalculation amounts to a decrease of 0.5 kt CO₂e (-3 %) for each projected year.

7.8 References

BEK nr. 752 af 21/06/2016: Bekendtgørelse om tilskud til etablering af biocover på deponeringsanlæg og lossepladser. Available at:

<https://www.retsinformation.dk/eli/lta/2016/752> (February 2026).

Danish Energy Agency (DEA), 2026: Denmark's Energy and Climate Outlook.

Danish Environmental Protection Agency (DEPA), 2026: Affaldsfremskrivning (Waste projection), data modelled by the Danish Environmental Protection Agency. Received via mail correspondence with Alberte Frederikke Høegh, The Ministry of Climate, Energy and Utilities, 20. January 2026.

IPCC, 2006: 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Available at: <http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html> (February 2026).

IPCC, 2019: 2019 Refinement to 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Available at: <https://www.ipcc-nggip.iges.or.jp/public/2019rf/index.html> (February 2026).

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrechtsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Andersen, T.A., Tougaard, S.L., Arendal, L. S. H., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott Bentsen, N., Baunbæk, L., & Hansen, M.G. 2026. Denmark's National Inventory Document 2026. Emission Inventories 1990-2024 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE – Danish Centre for Environment and Energy, 955 pp. Available at: https://envs.au.dk/fileadmin/envs/Emission_inventories/DENMARKS_NATIONAL_INVENTORY_DOCUMENT_TO_UNFCCC.pdf (August 2026).

Statistics Denmark, 2026: Statistics Denmark online StatBank. Available at: <https://statistikbanken.dk/statbank5a/default.asp?w=1920> (February 2026) (In Danish/English).

8 LULUCF

The emission and uptake of GHGs from the LULUCF sector (Land Use, Land Use Change and Forestry) primarily includes carbon dioxide (CO₂) from C stock changes in land use and cultivation of organic soils, small amounts of nitrous oxide (N₂O) from disturbance of soils and methane (CH₄) from Cropland, Grassland and Wetlands.

The LULUCF sector is subdivided into six major land use categories:

- Forest land (FL)
- Cropland (CL)
- Grassland (GL)
- Wetlands (WE)
- Settlements (SE)
- Other land (OL)

The projections are made based on the best available data of the past development in the land use in Denmark and expectations for the future. Regarding the methodology and further detailed information on historical estimation of the sources and sinks, see the latest available Danish National Inventory Report (NIR), Chapter 6 in Nielsen et al. (2026). Projections of agricultural crop distribution are prepared and delivered by DREAM. The Danish Energy Agency, as part of the Danish Ministry of Climate, Energy and Utilities deliver projections of straw removal for energy purposes. The Danish Agricultural Agency (SGAV), as part of the Ministry of Green Transition, delivers information on binding policy agreements and their respective expected effect on e.g. agricultural area with catch crops, grassland and organic farming, afforestation, and wetlands restoration on organic soils (SGAV, 2025ab). Emission estimates of Forest land and the minor source of harvested wood products are included but are prepared separately by the Department of Geosciences and Natural Resource Management (IGN), University of Copenhagen. The detailed methodology for the emission inventory and projections are described in the publications Nord-Larsen et al. (2025) and Johannsen et al. (2022). Updated projection data presented in the report is received directly from IGN in 2025.

8.1 Projected land use and land use changes

Approximately 68 % of the total Danish land area are reported under Cropland and Grassland in 2024, with 60 % with agricultural crops and 8 % is field boundaries etc. 15 % of the total land area is forest, see Figure 8.1. Intensive cultivation with a large number of animals exerts a high environmental pressure on the landscape and regulations have been adopted to reduce this. The adopted policy aims at doubling the forested area, restoring former wetlands, and establishing protected national parks. In Denmark, almost all natural habitats and all forests are protected, and the conversion of these areas therefore is limited.

Figure 8.1 shows the land use in 1990 and towards 2050. The land use and land use changes are based on a complex mapping of the entire terrestrial area of Denmark called the land use matrix (LUM) (Levin et al., 2014; Levin & Gyldenkerne, 2024). It is apparent from the figure that a continuous increase

in FL, SE and WE is expected, at the expense of primarily the CL area. The large increase in WE in 2025 to 2033 is due to a large rewetting program in Denmark (SGAV, 2024) primarily reducing the CL and the GL area. The definition of the LULUCF sectors applied here is based on the 2006 IPCC Guidelines. Numbers and distribution differ slightly from national statistics due to methodological differences.

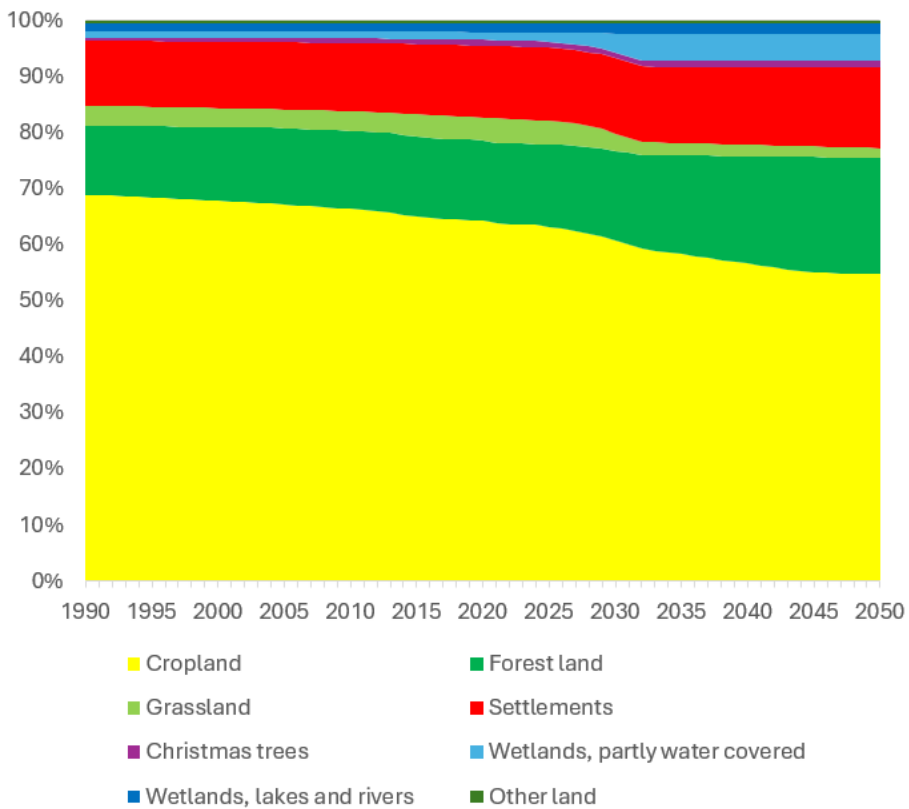


Figure 8.1 Land use from 1990-2050 distributed on land use categories.

Table 8.1 shows the distribution of land in number of hectares from 1990 to 2050.

One of the important contributors to LUC is conversion of CL and GL to FL and WE. Afforestation and rewetting of drained organic soils is a mitigation measure with high political priority according to, for example, Agreement on a Green Denmark (GTP, 2024).

Aside from the afforestation and wetland restoration, the registered LUC is primarily due to the continuous the demand for new Settlements and infrastructure purposes. Conversion to Settlements and other infrastructures (SE) is expected to continue with the same pace as seen historically, based on the average of the past ten years. Additionally, land reclamation amounted to 538 ha from 1990 to 2024 resulting in an increasing total area. Of this 494 ha were added to SE, 42 ha to GL and 2 ha to WE permanent water covered.

In total from 1990 to 2050, an afforestation of approximately 383 000 ha is expected. Deforestation is only expected to occur on approximately 18 000 ha from 1990 to 2050). In Table 8.1, Forest land includes Christmas trees. The deforestation is mainly due to conversion to SE and opening of the forest to grassland.

Table 8.1 Distribution of land area between the six land use categories.

Total area, ha	Forest land	Cropland	Grassland	Settlement	Wetlands	Other land	Total
1990	546 232	2 972 009	153 386	497 829	109 291	26 575	4 305 323
2024	666 622	2 728 764	191 121	559 117	133 662	26 575	4 305 861
2025	668 034	2 723 741	188 960	561 237	137 313	26 575	4 305 861
2030	723 237	2 623 239	143 047	571 839	217 923	26 575	4 305 861
2035	788 351	2 521 732	105 085	582 441	281 677	26 575	4 305 861
2040	853 559	2 451 339	99 744	593 043	281 602	26 575	4 305 861
2050	928 869	2 361 956	92 763	614 246	281 452	26 575	4 305 861

8.2 Projected LULUCF emissions 2025 - 2050

LUC reflects conversions of land from one land use category to another, and the carbon (C) stocks of the living biomass and the soil C equilibrium states in each land use category affect, whether the result is a net sink or source of emissions. In the following, emissions by sources are provided as positive values (+) and removals by sinks as negative values (-). The figures reflect the reporting under the UNFCCC. This means that an area undergoing land use change (LUC) is kept in a conversion category of 'land converted to' for 30 years before it is redefined as 'land remaining' in the new land use category. The emissions from soil C stock change are distributed equally over the 30 years.

Table 8.2 Overall emission estimates from the LULUCF sector from 1990 to 2050, kt CO₂e per year.

Land Use Category	1990	2000	2010	2020	2025	2030	2035	2040	2045	2050
4. LULUCF Total	6 504.2	5 023.0	2 341.0	1 132.3	-422.4	726.7	-910.2	-1 717.5	-2 624.5	-3 439.4
A. Forest Land*	-1 471.1	-1 480.8	-2 480.5	-2 381.0	-3 436.9	-1 728.3	-3 071.0	-3 695.1	-4 413.8	-4 842.2
1. Forest Land remaining Forest Land*	-396.1	-1 114.9	-966.4	-1 255.0	-2 383.7	-128.8	-1 407.8	-2 105.0	-2 999.4	-4 736.1
2. Land converted to Forest Land*	-1 075.0	-365.9	-1 514.0	-1 126.1	-1 053.2	-1 599.5	-1 663.3	-1 590.2	-1 414.4	-106.1
B. Cropland	6 714.4	5 380.6	3 793.8	2 438.5	1 777.4	1 247.9	707.0	562.9	402.4	118.9
1. Cropland remaining Cropland	6 651.2	5 324.6	3 731.2	2 405.0	1 747.7	1 214.8	669.6	521.0	355.5	66.5
2. Land converted to Cropland	63.20	56.02	62.54	33.45	29.74	33.19	37.39	41.97	46.95	52.38
C. Grassland	666.9	647.5	656.6	844.1	1 048.3	372.4	9.1	9.0	9.2	9.5
1. Grassland remaining Grassland	595.2	595.2	595.2	800.8	1 040.1	363.7	0.0	0.0	0.0	0.0
2. Land converted to Grassland	71.8	52.3	61.3	43.4	8.2	8.7	9.1	9.0	9.2	9.5
D. Wetlands	111.33	80.34	76.26	142.89	212.38	598.09	1 209.65	1 199.75	1 176.55	1 117.24
1. Wetlands remaining Wetlands	110.8	75.5	58.3	47.4	43.8	0.0	0.0	0.0	0.0	0.0
2. Land converted to Wetlands	0.5	4.8	18.0	95.5	168.6	598.1	1 209.7	1 199.8	1 176.6	1 117.2
E. Settlements	485.1	369.6	319.9	205.4	259.1	280.7	302.2	299.5	282.0	279.8
1. Settlements remaining Settlements	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2. Land converted to Settlements	485.1	369.6	319.9	205.4	259.1	280.7	302.2	299.5	282.0	279.8
F. Other Land	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G. Harvested Wood Products (HWP)*	-2.4	25.8	-25.1	-117.6	-282.8	-44.0	-67.1	-93.6	-80.9	-122.6

*The methodology for estimation of emission and projections for all Forest land and HWP data are reported in detail in Nord-Larsen et al. (2025).

Overall, is it projected that the LULUCF sector from being a large source in 1990 will turn into a net sink around 2030-2032. There are three major reasons for this development.

- Firstly, we see an effect of the afforestation which has taken place over many decades. It is now storing large amounts of CO₂;

- Secondly, the large emissions from drained organic soils are reduced and expected to cease by 2050. The reduction in the emission from the organic soils has two main reasons. Partly because many of the organic soils has only a thin organic profile. The loss of organic matter from a lot of these soils is now at a so low level that they classified as mineral soils and only release small amount of the remaining organic carbon until the carbon equilibrium state with the current agricultural practise is met. The other reason is due of restoration of drained agricultural cropland and grassland back into their former state as wetlands. This took place to smaller degree from 1990 to 2020 but is now accelerated up in the coming years so it is expected that in 2050 virtually no organic soils will be in a drained state.
- Thirdly, the input of organic matter in mineral soils is increasing, which increases the carbon store in the mineral soils. The increase in the carbon input is both the ban of straw burning in 1990, increased yield which increase the carbon input to the soils and the large import of feeding to the large Danish animal herd which produce large amounts of manure to be spread on the Danish fields.

FL remaining FL is expected to be a net sink through the whole period up to and including the last projected year 2050. For further details on the forest projection see Nord-Larsen et al. (2025a,b).

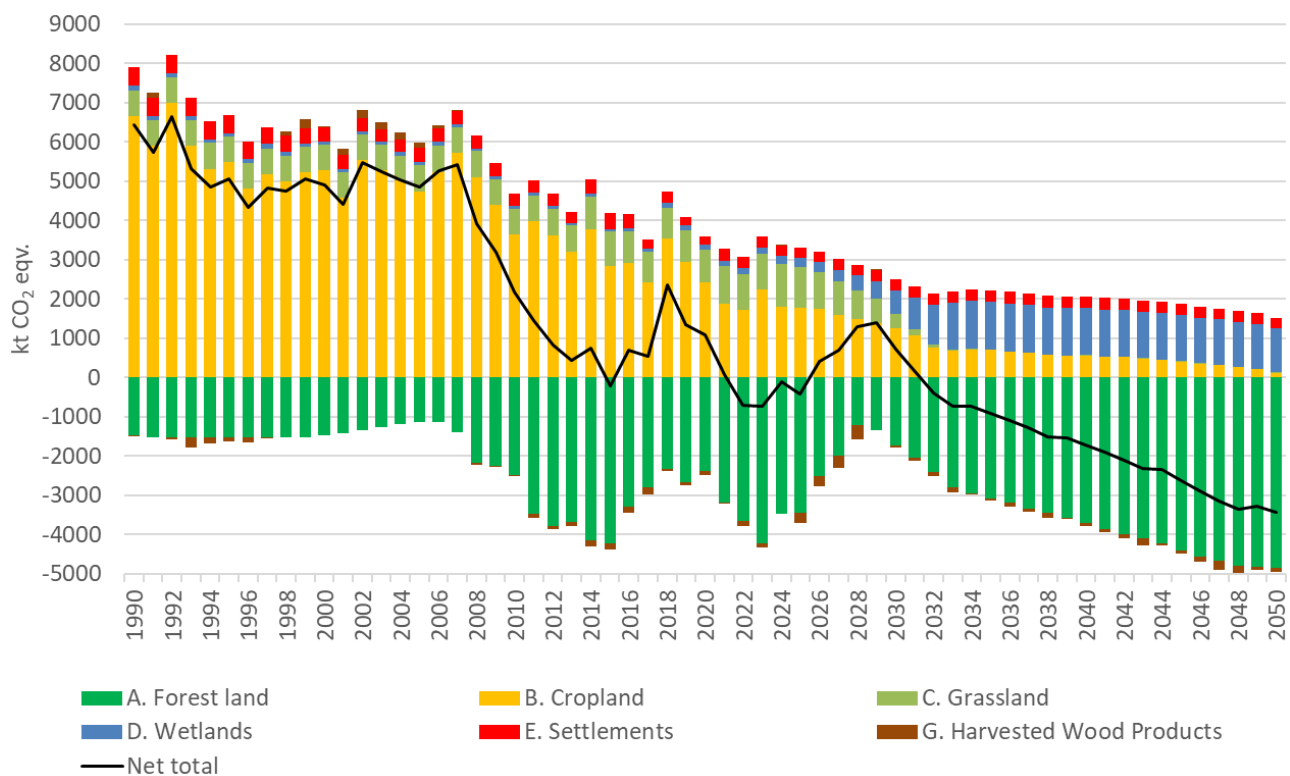


Figure 8.1 Emission estimates from the LULUCF sector from 1990 – 2050, distributed between land use categories and as net total (black line), kt CO_{2e}.

CL and GL are currently major sources, primarily due to the large area with cultivated organic soils in Denmark. However, drained organic soils loose carbon at a higher pace than earlier anticipated (Beucher et al., 2023), and consequently emissions from organic soils have ceased considerably over time. The steady extensification of the CL area on organic soils towards permanent GL and a large, expected conversion to WE, lead to a decrease in emissions until 2050 where it is expected that almost no organic soils will be drained or cultivated. Currently, the agricultural mineral soils have been storing carbon at a

rate of 200-300 kt CO₂ per year, this is expected to slightly decrease to an equilibrium state. This change is multifactorial and depends on crop grown, future yield expectations, increased temperature and C saturation in primarily the clay soils where the equilibrium state is reached with the current carbon input and the degradation in the soil. In the projection of emissions from mineral soils, a dynamic temperature modelling tool (C-TOOL ver. 2.3.) is used. The overall emission from CL depends also on the cultivated agricultural area on organic soils. Due to major subsidies to rewet these soils the emission from drained organic soils in CL will be reduced in the future adding to the expected lower emission from CL. However, another important contributor to the decreasing emissions from organic soils is the loss of carbon through emissions, thus resulting in lower emissions as well as a decreasing area of organic soils.

Grassland is projected to be a declining source and close to zero as the current emission is related to drained organic soils on permanent GL. The organic soils in GL will according to the expected WE restoration (SGAV, 2025) be water saturated before 2050 and converted to WE.

The overall trend for WE is an increase in CH₄ emissions from restored wetlands until 2035, also visible in Figure 8.1, because land converted to WE is expected to increase due to the current ongoing WE restoration program which has been running for several years and currently ongoing up until 2033 for conversion of agricultural organic soil. Simultaneously, there will be decreasing emissions from WE remaining WE, caused by an expected cease of the peat excavation in Denmark in near future.

SE is expected to have stable emission of around 250-300 kt CO₂ per year in the future. This is related to loss of organic matter from mineral soils. The major converted area is from agricultural land which have a relative high carbon content which will not be maintained under SE conditions. Denmark uses a linear model with 30-years transition period from when the SE is established to when the soil is in a new equilibrium state. As the conversion to SE was higher in 1970's there were a larger emission in 1990. The expected demand for SE is based on the historical demand for land over the last 10 years. Therefore will this source be stabilized around the loss from this average area.

The most important emission factors are given in Table 8.3. When LUC is taking place, fixed factors are used for the direct changes in biomass C. More detailed information on references, additional subcategories and emission factors can be found in the latest Danish National Inventory Report.

Table 8.3 Most important carbon stock and emission factors used in the emission inventory and projection for calculating emissions from land use conversions.

C pool	Land use category	C stock	Unit	C in t CO₂e.
Living biomass ^{a, b}	Cropland	5.9	t C per ha	21.8
	Grassland ^c	4.4	t C per ha	16
	Wetlands, established	6.8	t C per ha	25.1
	Settlement	2.2	t C per ha	8.1
Mineral soils	Forest land ^d	142	t C per ha	- (stock value)
	Cropland ^e	120.8	t C per ha	- (stock value)
	Grassland ^f	125.2	t C per ha	- (stock value)
	Wetlands	235	kg CH ₄ per ha per yr	
	Settlements ^g	96.6	t C per ha	
Organic soils	Land use subcategory	EF		EF in t CO₂e.
Organic soils >6 % OC	Cropland CO ₂ emission depends on Ground Water table.	7.3	t C per ha	26.9
		NO	kg CH ₄ per ha per yr	NO
		13	kg N ₂ O-N per ha per yr	5.4
	Permanent CO ₂ emission depends on Ground Water table.	4.5	t C per ha	16.5
		16	kg CH ₄ per ha per yr	0.4
		8.2	kg N ₂ O-N per ha per yr	3.4
	Forest land, drained	2.6	t C per ha	9.5
		2.5	kg CH ₄ per ha per yr	0.1
		2.8	kg N ₂ O-N per ha per yr	1.2
	Wetlands, periodically water covered	NO	t C per ha	NO
		235-288	kg CH ₄ per ha per yr	6.6-8.1
		NO	kg N ₂ O-N per ha per yr	NO

NO = Not occurring.

^a Living biomass = above ground biomass and below ground biomass.

^b The default conversion factor of 0.5 has been used to convert dry matter (DM) to carbon (C).

^c Average of grazing land and other grassland.

^d Average of all forest mineral soils (<6 % SOC, 262 plots in NFI and "Kvadratnet").

^e Average of different Danish mineral soil types.

^f Same as for Forest land.

^g 80 % of Cropland.

^j Only for the drained area, the EF for ditches is higher (542 kg CH₄ per ha per yr).

8.2.1 Comparison with previous projection

Every year the new projection will show a slightly different picture of the projected emissions. As activity data for a new historical year is available, the projections that depend on previous averages of these activities are affected and improvements and adjustments to the calculations, models and data input also continuously affect the results.

The projection for the LULUCF sector made in 2026 differ to the previous projection made in 2025 due to several reasons.

For forests a recommendation made during the 2025 UNFCCC review of the Danish inventory led to a change in the estimate for mineral soils during land conversions involving forests and there are updated assumptions on the implementation profile for afforestation. For cropland and grassland there are several changes. There are updates based on historical data for an additional year effecting animal manure. For organic soils, there is a change in the assumption on whether organic soils converted to other land uses mineralise between the subsidy being granted and the project being implemented. For wetlands, CH₄ emissions from rewetted mineral soils and lakes are now included based on an emission factor from the 2019 IPCC Refinement leading to increased emissions from the category.

The estimates on historical and projected net total LULUCF emissions from 1990 – 2050 from both this year and last year's projections are presented in Figure 8.2 to visualise the difference.

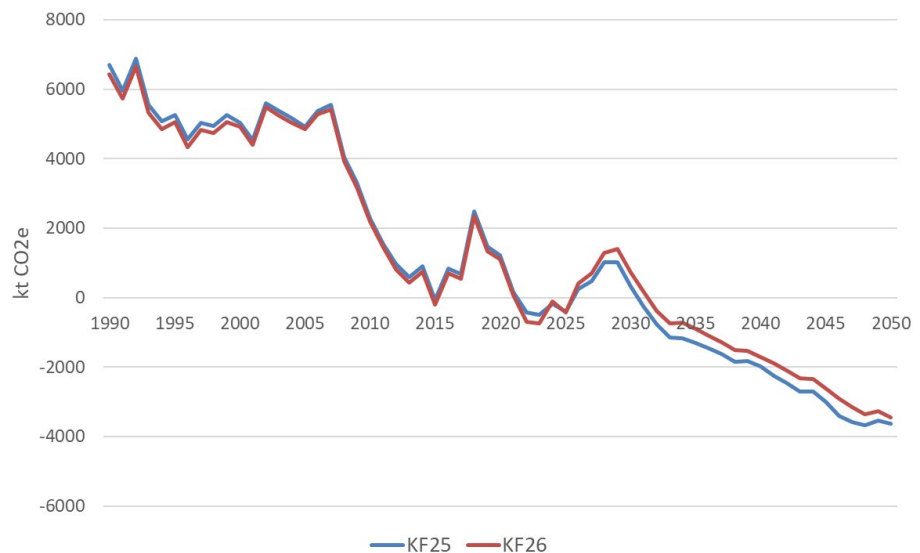


Figure 8.2 Net total emissions from the LULUCF sector from 1990 – 2050 in the 2026 projection (red line) and last year's 2025 projection (blue line).

8.3 Forest land

The Department of Geosciences and Natural Resource Management at the University of Copenhagen (IGN) is responsible for the reporting and projection of GHG emissions from the Danish forests and Harvested Wood Products (HWP, see section 8.10) (Nord-Larsen et al., 2025a). The Danish Forest projection to 2050 is reported in Nord-Larsen et al. (2025b) and also shown here in Figure 8.3. The Land Use Matrix developed by Institute of Environmental Science at Aarhus University to assess LUC is the same in this report as in the forest projection report. Christmas trees grown on agricultural soils are included in FL.

GHG emissions from the Forest sector

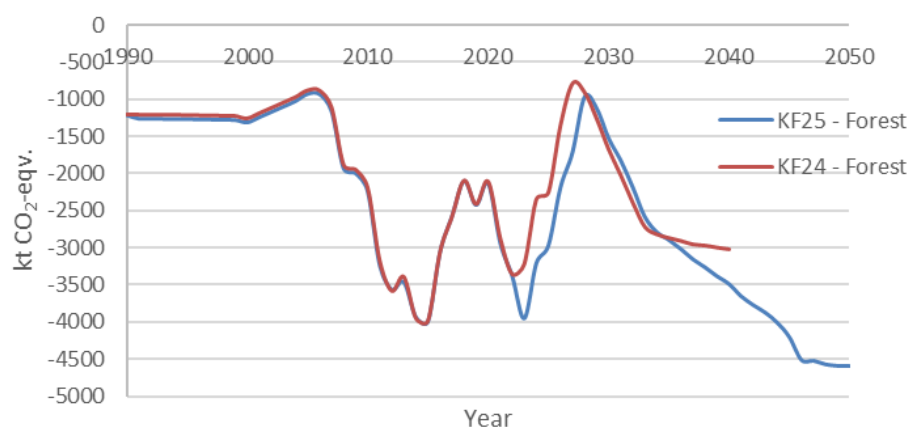


Figure 8.3 Net total emissions from the Forest sector from 1990 – 2050 in the 2025 projection (blue line) and last year's 2024 projection (red line).

Since 1990, the forested area has increased. This is expected to continue in the future, as an effect of Danish policy aims to increase the forest area. The afforestation rate is based on data received in February 2025 from the Agency for Green Transition and Aquatic Environment. Afforestation is expected to increase considerably since the last projection as a total afforestation of 275 000 ha before 2045 is projected, which gives an annual afforestation rate of 13 500 ha per year. From 2045 no further afforestation is included as the projection is

based on existing funding schemes and no plans go beyond 2045. The Danish forests are well protected, and only limited deforestation is expected to occur – around 350 ha per year. The deforestation taking place is mainly due to development of infrastructure and to a limited extent also due to an opening of the state forest where small forest areas are turned into open spaces which are reclassified in the Land Use Matrix. These spaces are essentially converted into Grassland.

The forest projection is based on an individual tree-based approach, see Nord-Larsen et al., (2025b).

8.4 Cropland

Agriculture occupies a major part of the Danish territory. In total, approximately 2.7 million ha are utilised for agricultural activities.

CL is subdivided into four types of land use: Agricultural CL, Woody agricultural CL, which is fruit trees and willow on CL etc., hedgerows and small biotopes and “other agricultural land”. In the inventory and in the projection, the latter is defined as the difference between the projected agricultural area and the CL area defined by the land use matrix. The majority of the CL area is the agricultural cropland, which is mainly cultivated with annual crops such as cereals, rape seed, fodder beets and grass in rotation.

8.4.1 Agricultural cropland

The area with CL has decreased over the last many years, primarily due to urbanisation and afforestation. This is expected to continue in the future. According to Statistics Denmark (DSt, 2026) the area with agricultural crops has declined with 141 000 ha from 1990 to 2000, or 14 100 ha per year. From 2000 to 2010, the reduction in the area with agricultural crops was reduced with 600 ha. Likely, this development is mainly caused by a change and widening of the EU subsidiary system, which has resulted in more agricultural CL registered in the application schemes than previously, and hence reported in Statistics Denmark. From 2010-2024, the area with agricultural crops on average declined app. 1800 ha per year (DSt, 2026).

The figures from the LUM, which are applied in the projection, are more conservative as land will remain in the original category (here CL) until it is identified or registered as another land use category.

For the projected distribution of the common cash crops and the total projected agricultural area, the DREAM model is used, see Chapter 6 for more details.

8.4.2 Methodology

In CL, three different C pools are accounted for: living biomass (above ground living biomass and below ground living biomass), dead organic matter, and soil organic carbon (SOC). Dead organic matter is only considered in conversions from Forest land (counted as a loss in CL).

By default, the amount/change of living biomass in CL is estimated as the amount of living biomass at its peak, i.e. just before harvest. This peak of the C stock for living biomass in annual crops is defined based on the average

cereal harvest yield over 10 years from 2000 to 2009, which gives a carbon stock in living biomass of 5.9 tonnes C per ha. This is the average used for land use conversions both to Cropland (as a gain in CL) and from Cropland (as a loss in the new land use category). As is apparent from Table 8.3, the living biomass is higher in CL than both GL and SE, which is why a reduced total area with agricultural CL, is expected to cause an average net loss of biomass even though the loss is partly counteracted by an increase in the amount of living biomass in the land class to which it is converted. Afforestation also causes an immediate loss of biomass instantly oxidised.

8.4.3 Mineral soils

The change in SOC in mineral agricultural soils is estimated with the model C-TOOL (Ver 2.3) (Taghizadeh-Toosi, 2015). C-TOOL is used for all mineral soils collectively for CL and GL with area input from the digital field maps and data (Land Parcel Information Data, LPIS), as delivered by the Agency for Green Transition and Aquatic Environment, a part of the Ministry of Green Transition, and yield data from Statistics Denmark. Changes in SOC stocks in areas that are registered as CL or GL in the LUM are therefore included in the SOC stock change of CL. C-TOOL is a dynamic 3-pooled soil C model which uses annual C input and C stock in soil as driving parameters. C-TOOL is run on eight separate regions and further subdivided into two or three soil types depending on the soil types within the region. The input to C-TOOL is the amount of straw and roots returned to soil based on actual crop yield, areas with different crop types and number of volatile substances (carbon compounds) applied to the soil with animal manure as reported in the agricultural sector. Based on this, C-TOOL estimates the degradation of Soil Organic Matter and returns the net annual change in C. C-TOOL Ver. 2.3 has been used for this projection.

8.4.4 Crop yield

The projected crop yield is based on historical crop yields in the period 2006-2024, which have been converted to five-years average (e.g. 2006-2010, 2007-2011 etc.) to establish a linear trend.

In 1998 policy makers in Denmark introduced a restriction on the amount of nitrogen the farmers can apply to the soils. This policy was partly abandoned in 2016, meaning that farmers are now less restricted in their N fertilization. Hence, the historical yields from 2006 to 2015 were lower compared to now. A technical yield correction of the observed yields for 2006-2015 has been made to improve the projection. This results in an estimate for all cash crops of 0-0.4 hkg kernel per ha per year, which is the average nitrogen corrected yield increase.

The effects of the planned new nitrogen regulation are not included in the projections as the concrete measures have not yet been defined.

8.4.5 Catch crops

Presently, a re-evaluation of the Danish agricultural regulation is ongoing, aiming to move from a general more evenly distributed regulation to an emissions targeted regulation on farm level. This change will affect the future area with especially catch crops to reduce nitrogen leaching. Catch crops grown on approximately 212 000 ha in 2010, increased to approximately 606 000 ha in

2024. It is expected to remain at this level throughout the projection period (SGAV, 2026a); each year adding biomass to the SOC stock. Compared to last year, the projected area with catch crops has been reduced.

8.4.6 Straw removal rate

Removal of straw from the fields is used as input in C-TOOL to estimate the amount of C added to the soil. Data from Statistics Denmark (DSt, HALM1), which covers straw for both energy, feed and bedding purposes, is used in the historical inventory. Removal of straw for energy purposes is currently very difficult to project. In the projection is used data from Danish Energy Agency on the energy yield from burned straw in PJ converted to amount of biomass. Removal for feed and bedding is still projected from the statistics in HALM1, as an average of the last three years now further adjusted according to the projection of cattle livestock (slight decrease).

8.4.7 ECO-schemes and projected crop distribution

A couple of the eco-schemes implemented in the CAP (common agricultural policy) system are reflected in the LULUCF projections if they influence crop distribution significantly. This year's projection is affected by the eco-scheme on biodiversity, the eco-scheme for extensification towards permanent grass, and the GLM8 requirements for farmers to leave a minimum of 4 % of their cultivated land as non-productive areas. These all lead to a reduction of the cultivated agricultural area. Not all areas regulated through the schemes are included directly, as it is assumed that most land is either already non-productive or peripheral areas or is already categorised as grass in the LUM. The LUM and its categorisation of land as either CL or GL is not affected by the eco-schemes.

Organic agriculture is reflected in its historical impact on the compiled yield and crop distribution, which are not at this point differentiated between organic and conventional agriculture.

8.4.8 Temperatures

In the projection, observed temperatures have been used including December 2025. Future temperatures have been estimated for each region by the Danish Meteorological Institute (Courtesy of Senior Researcher Marianne Sloth, Danish Meteorological Institute). For each region, a linear increasing temperature regime has been estimated based on IPCCs 5th Assessment Report (AR5) for Danish conditions for the RCP 4.5 scenario with an average increase in the temperature of 1.6°C per 60 years from the mean period 1986-2005 to the mean period 2046-2065 (Olesen et al., 2014). The natural observed variation in the monthly temperature data from 1998 to 2025 has been added to include the effect of annual variation. The outcome of the projected model therefore is not strictly linear in an attempt to include natural variation, as shown in Figure 8.4. C-TOOL is run with 10 different randomly selected temperature projections up to year 2050, and the output used in the projection presents the average values of these.

8.4.9 Results from C-TOOL on C stock in mineral soils

Presently, the clay agricultural soils are considered to be in a near steady state of soil carbon equilibrium. The sandy soils, primarily located in Jutland are

expected to increase their carbon stock further. In total, the agricultural mineral soils are expected to constitute to be in a carbon neutral balance in the period up to 2050. Figure 8.4 shows the reported and expected annual emissions from mineral soils in kt C per year. Due to high yields in most recent years, a sink has been estimated in most years from 2010 and forward. The emissions from agricultural mineral soils are projected to stay relatively stable until 2050 with a slight tendency towards net removals. Year 2018 was extremely dry with low yields and hence an estimated decrease in C stock and a large emission.

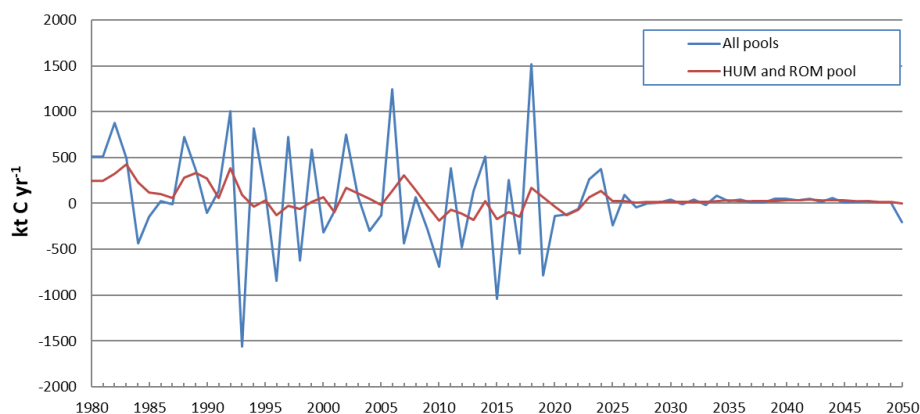


Figure 8.4 Annual emissions of C from mineral soils in Cropland and Grassland. Negative numbers indicate net storage and a CO₂ sink effect.

8.4.10 Organic soils

The emissions from organic soils in the land use categories CL and GL are based on an emission model, which takes into account the distance to the ground water table in the organic soils. For a further description see Gyldenkaerne et al. (2025). The model is a pixel-based model with a 10*10 m resolution where the apparent emission in each pixel is estimated. The total annual emission is then the sum of the included pixels. The estimated emission in each pixel depends on the C content, the depth of the organic profile, the distance to the ground water table combined with a s-shaped emission function (often denounced as a Gompertz-function). The function has a minimum and a maximum emission. The maximum emission is estimated to 10 tonnes C per ha (Elsgaard, 2024). The minimum emission is set to 0 (zero). No differences can be found in the emission between land use, crop in rotation versus permanent grassland when taking the ground water table into account, so the model is used for all organic soils with > 6 % organic carbon (OC). For thin organic layers (<= 30 cm) is the maximum emission reduced to 75 % of the maximum.

The area of organic soils grown with annual crops or grass in rotation, defining a certain drainage level causing emissions, is based on data from the EU subsidy register used in a combination with the map of organic soils in 2022 (Beucher et al., 2024). Soil maps were produced representing 1975, 2010 (Adhikari et al., 2013; Greve et al., 2011), and again for 2022. Both the 2010 and 2022 maps showed a decrease in the area with organic soils in Denmark and are assumed to have a high accuracy. In 1975, 237 500 ha agricultural land was registered as having ≥ 6% OC. Using the 2010 boundary of agricultural land (thus including both CL and GL) in the LUM on top of the 2010 map, the number was reduced to around 180 000 ha, which for 2022 using the 2022 LUM was reduced further to 117 000 ha with > 6% OC in total. This large decrease

is attributed to the fact that the Danish organic soils are very shallow and thus “disappear” because they are depleted for organic matter as cultivation and drainage initiates the C decomposition process. For the projection, it is assumed that the organic soils that are below 34 cm in thickness continue to lose carbon, thus this organic area is projected to decline to 32 500 ha organic soil in 2030 with nothing remaining in 2050. Organic soils with a depth of >34 cm are assumed to maintain the OC % content as these soils are assumed to have a deep horizon where the OC content does not change. However, as a very large effort on wetland restoration in the coming years is expected, the above-mentioned remaining hectares of drained agricultural organic soils without wetland restoration is expected to be reduced to only 2400 hectares in cropland in 2050.

Conversion of organic soils into WE is accelerating the speed in the emission reduction from the drained agricultural organic soils. In the period 2024-2033, approximately 69 000 ha agricultural soils (CL and GL) are expected to be converted to WE. Section 8.6.2 describes the conversion of CL and GL to WE.

For an overview of the most relevant emission factors related to organic soils, most of which are from the 2013 Wetland Supplement in IPCC (2014), see Table 8.3.

For CH₄ is used the previous used set-up with a default CH₄ emission factor of 16 kg per ha per year for soil having > 12 % OC and soils with 6-12% OC are given emission factors which are half of that of the soils with > 12% OC, as very few measured values can be found in the literature for the medium or low C organic soils. N₂O emissions from CL and GL are reported in the agricultural sector, Chapter 6, and therefore not reported here. IPCC (2014) is also the source for the emission factor for leached carbon, i.e. off-site CO₂ emissions via drainage related waterborne carbon losses. For more detailed information see the latest National Inventory Document on greenhouse gas emissions (Nielsen et al., 2026).

The total area with organic soils in CL and GL and their emissions reported is shown in Table 8.4.

Table 8.4 Areas and LULUCF emission from organic soils in Cropland and Grassland, 1990-2050.

	1990	2010	2020	2024	2025	2030	2035	2040	2050
Cropland, registered fields > 6% OC, ha	182 312	149 675	87 725	59 910	58 499	40 095	20 221	13 817	2 422
Grassland, > 6% OC, ha	30 761	30 761	39 790	50 911	49 471	18 883	0	0	0
Cropland and Grassland, total, ha	213 073	180 436	127 516	110 821	107 970	58 979	20 221	13 817	2 422
Emission, from agricultural land, kt C	1 555.1	1 287.9	827.5	670.3	660.3	370.0	142.2	100.5	19.8
Emission from leached C, kt C	61.9	61.4	35.3	32.8	17.3	15.8	5.2	3.7	0.8
CH ₄ , kt CH ₄	13.6	11.7	9.0	8.4	8.2	4.2	1.2	0.8	0.1
Emission, total, kt CO ₂ e.	6 144.8	5 111.7	3 321.0	2 726.8	2 668.6	1 489.2	559.5	394.9	77.4

The CO₂ emission from agricultural cultivated soils has been reduced by around 73 % from 6650 kt CO₂e in 1990 to 1788 kt CO₂e in 2024. It is expected to continue to decrease with an estimated emission in 2030 of 1248 kt CO₂e, equivalent of a total reduction since 1990 of 81%.

8.4.11 Perennial woody crops

Perennial woody crops cover fruit trees, fruit berry and nut plantations and energy crops such as willow, grown on CL. Fruit and nut trees are marginal

in Denmark and cover only around 4000 ha in 2024, based on data from the land parcel information system and agricultural register. No changes in the area with fruit trees are expected and so projected based on the latest historical year. The area with willow as energy crop is expected to be stable with 4841 ha as in 2024, as there are currently no incentives to increase the area. The area has only minimal effect on the emission estimates, as it is harvested every 2-3 years and thus no larger amounts of C in living biomass is present in willow plantations.

8.4.12 Hedgerows and small biotopes

The area with hedgerows and small biotopes, which do not meet the definition of forest, is today around 100 000 ha within the defined CL area. An analysis has shown that the area has not changed significantly over the past 20 years, although there is a large dynamic in the landscape as old hedgerows are removed and replaced with new ones to facilitate new farming strategies. Establishing hedgerows and small biotopes are partly subsidised by the Danish government. An annual increase of 50 ha new hedges is assumed in the projection.

8.5 Grassland

GL is defined as permanent grassland and areas with perennial vegetation that do not meet the forest definition and includes areas such as heath and grazing land, which are not reported in any of the other land use categories. This GL definition differs from the one used by Statistics Denmark for permanent GL, which does not include heath land and other marginal areas. Therefore, areas reported here for GL are not comparable to data from Statistics Denmark. The Danish reporting is based on information from the land parcel information system and agricultural register as registered by the farmers for the EU subsidy schemes (LPIS). In this system, the actual crop grown on each field is known. Furthermore, a relatively large area, which should be considered as GL are included in the CL area of technical reasons. This allocation has no influence on the emissions as the emission from mineral soils are modelled as a whole based on LPIS information, emission from organic soils is only dependent on the ground water table regardless of the allocation in CL or GL and hedges and all other perennial wooden crops are reported in the CL sector.

A total of 191 000 ha is reported in the GL category in 2024. The area is expected to decline in the future due to conversion into Wetlands.

N₂O emissions from cultivated GL are reported with the agricultural sector in Chapter 6.

Drained GL will continuously be a net source of greenhouse gas emissions but as the allocation has no impact on the emissions in the projection are they reported in the previous Chapter 8.4 under Cropland.

8.6 Wetlands

Wetlands (WE) are subdivided into flooded wetlands, defined as lakes and other permanently water covered areas, periodically water covered areas, such as peat extraction areas, fens and bogs. The wetlands with the significant

emissions are the peat extraction and the restored wetlands, which can be restored into both flooded and periodically water covered areas. Emissions from wetlands occurring before 1990 are not reported. Due to the intensive utilisation of the Danish area for farming purposes and thus intensive efforts historically to drain WE, WE restoration has taken place for many years for environmental reasons, to restore habitats, reduce nutrient leaching and more recently to reduce greenhouse gases as rewetting halts the C decomposition.

8.6.1 Peat land

Peat excavation is taking place at three locations in Denmark, and all sites are managed by Pindstrup Mosebrug A/S. In total, it is estimated that 800 ha are under influence of the drainage from the peat excavation, although the current open area for peat excavation is around 300 ha. Pindstrup Mosebrug A/S is operating under a 10-year licence, and it is not expected to be extended further (Pindstrup Mosebrug, pers. com). It is therefore not expected that any major changes will take place until the licence expires in 2028 and activity data therefore is projected based on the latest five years historical average from the three sites. From 2029, no peat excavation is expected in Denmark.

The emission is estimated as a degradation of peat on the soil surface and an immediate oxidation of excavated peat, which is mainly used for horticultural purposes. The total amount of peat excavated is decreasing and has been reduced almost 60 % from 399 000 m³ in 1990 to 146 000 m³ in 2024. The total emission from peatland is estimated to 34 kt CO₂, 0.0266 kt CH₄ (0.7 kt CO₂e) and 0.0004 kt N₂O (0.1 kt CO₂e) in 2024.

8.6.2 Restored Wetlands

Only emissions from re-established WE are included in the WE category. Emissions from naturally occurring wetlands have not been estimated. Some larger Restoration projects were carried out in the 1990s. Until 2024, a total of approximately 24 000 ha was converted to WE. It is not possible to give a full picture of the area with organic soils, which were converted as there are two maps, one for 2010 and one for 2022. Based on an analysis of the maps, it is considered that 50 % as organic soil in the period 2011 to 2021. A low fraction of organic soils in the historical conversions is explained by the fact that a large share of former wetlands restoration projects were targeted reductions of nitrogen leaching on mineral soils and not targeted organic soils.

Until 2033 it is expected that approximately 151 000 ha of wetlands will be restored on current CL and GL. areas. Of these, it is expected that 32 000 ha will be outside the actual field boundaries, 50 000 ha will be on mineral soils, and the remaining 69 000 ha will be on organic soils inside the field boundaries.

There has been a large variation in the area converted to restored WE within the past years. In the projection, up to 15 350 ha is expected to be converted to WE in a single year in the period up to 2032 (Table 8.5). Starting 2033, no further wetland restoration is projected to take place as no further funding has been decided upon.

The new areas of WE are distributed between the existing subcategories of flooded WE (lakes) and periodically water covered WE. In the projection, it is assumed that 90 % is converted to periodically water covered WE and 10 %

into flooded area. It is furthermore assumed that the WE restoration will take place on Grassland and Cropland in accordance with the latest distribution of restored land to WE. These data shows that 76 % of the restored WE were on GL and the remaining 24 % on CL.

The new partly water covered WE are assumed to be in a net zero balance in terms of the soil C stock. This means that no losses or gains are assumed in the soil, as the C decomposition is halted by the waterlogged conditions. Only emissions of CH₄ are reported, applying the emission factor from 2013 Wetlands Supplement with a net emission of 288 kg CH₄ per ha per year for soils >12 % OC, and 235 for mineral soils (0 – 12 % OC). This has been implemented in the projection for partly water covered WE. For lakes and other fully water covered areas an emission factor of 183 CH₄-C per ha from the 2019 Refinement is used.

The projection considers restoration of WE in the governmental budget of the Danish Finance Act (FA) as received from SGAV. The exact numbers are estimated by SGAV based on historical data on various wetland restoration projects and expenses. In the present projection, effect is assumed implementation after 5 years. The expected total converted organic agricultural land converted to WE from is shown in Table 8.5.

Table 8.5 Expected agricultural areas (CL+GL) converted to Wetlands (WE) in certain years and in total from 2024-2033 with public funding, ha (SGAV, 2025b).

Wetland scheme and funding ^a	% Organic soil	2025	2027	2029	2030	2031	2032	2033	Total conversion to WE 2024-2033
Organic soil scheme (Rural Development Program)	60	828	3 151	3 782	6 303	8 647	8 647	3 782	36 878
Organic soil scheme +22000 (CAP + national)	60	0	0	1 405	22 689	18 998	19 002	1 708	68 468
Nitrogen Removal Wetlands	40	894	1 414	1 414	1 414	1 414	1 414	0	13 276
Phosphorus Removal Wetlands	60	0	109	118	109	109	109	0	690
Finance Act '20, organic soil	60	1 945	2 626	8 646	0	0	0	0	25 857
Finance Act '21, organic soil	60	0	3 638	0	0	0	0	0	6 183
Accumulated Wetland restoration (incl. 2021)			25112	57009	87524	116692	145863	151352	

^aIn Danish: Lavbundsordning uk.29 kollektive (LDP-ordning), Lavbundsordning + 22000, Kvælstofvådområder uk.34, Fosforvådområder uk.39, Finanslov 2020 lavbund, Finanslov 2021 Lavbund (5000 ha).

The overall expected emission trend for Wetlands is shown in Table 8.2 and 8.6. In recent years, the emissions from WE have been increasing to approximately 200 kt CO₂e in 2024 and are expected to increase to 600 kt CO₂e in 2030 and to 1100 kt CO₂e in 2050, primarily due to the increase in CH₄ emissions from the organic soils with restored WE. The negative emissions of CO₂ (sink effect) occur in years with large conversions of CL/GL into WE, as an instant effect of the higher C stock in living biomass for WE compared to CL/GL, see Table 8.2. N₂O emissions are minor and assumed not to occur on restored WE, so these are halted as peat extraction activities end by 2028.

Table 8.6 Expected emissions from WE from 1990 to 2050.

Wetlands	1990	2000	2010	2020	2025	2030	2035	2040	2050
Flooded area, lakes, 1000 ha	59.4	60.1	61.2	64.9	68.1	76.6	83.3	83.7	84.4
Periodically water covered, 1000 ha	48.2	48.4	49.2	58.6	68.4	141.4	198.4	197.9	197.0
Peat extraction area, 1000 ha	1.6	1.6	1.6	0.8	0.8	0.0	0.0	0.0	0.0
Wetlands, total, 1000 ha	109.3	110.1	112.0	124.3	137.3	217.9	281.7	281.6	281.5
Managed Wetlands, Living and dead biomass, kt C	0.1	0.1	0.3	-1.1	-5.3	-43.8	-0.1	-0.1	0.0
Peat extraction, soil organic matter, kt C	29.8	20.1	15.4	12.7	11.7	0.0	-0.3	0.0	0.0
Total, kt C	29.9	20.2	15.7	11.6	6.4	-43.8	-0.4	-0.1	0.0
CH ₄ , kt CH ₄	0.1	0.2	0.7	3.6	6.7	27.1	43.2	42.9	39.9
N ₂ O, kt N ₂ O	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
C, kt CO ₂ e	109.7	74.0	57.7	42.5	23.4	-160.8	-1.5	-0.2	-0.2
CH ₄ , kt CO ₂ e	1.5	6.1	18.4	100.3	188.8	758.8	1 209.9	1 200.0	1 117.4
N ₂ O, kt CO ₂ e	0.2	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0
Total, kt CO ₂ e	111.3	80.3	76.3	142.9	212.4	598.1	1 208.4	1 199.8	1 117.2

When WE establishment is taking place on soils that are already fairly wet and not on fully drained agricultural organic soils, the emission reduction effect of restoring them as wetlands is lower, because the baseline emissions are also lower. Based on experience from established WE restoration projects, it can be concluded that this is the case for a high share of the planned conversions.

8.7 Settlements

The need for areas for housing and other infrastructure has resulted in an increase in the SE area of approximately 61 000 ha or around 1700 hectare per year on average from 1990 to 2024. As there were large building activities in the 1960s and 1970s and hereafter a decreased activity, the emission in land converted to SE was high in 1990 and has now decreased to a steady emission estimate of just below 300 kt CO₂ equivalents per year in the projection up until 2050. It is assumed that the historical increase in SE will continue in the future and mainly result from conversion of CL.

The overall expected emission trend is shown in Table 8.2. Land converted to SE is reported as a source of CO₂ because the C stock of both soil and living biomass in the other land use categories are higher than in SE areas. In GL and CL, the C stock of mineral soils is 125.2 and 120.8 t C per ha respectively. When converted to SE, it is assumed that a new equilibrium of 96.7 t C per ha is reached after 30 years. Consequently, the C loss and emissions from converted soils are distributed and will continue for many years after the original conversion.

8.8 Other Land

Other Land (OL) is defined as sandy beaches and sand dunes without or with only sparse vegetation and rocks. The total estimated area is 26 575 ha, kept constant in all years. No changes in the area are projected. The C stock in these soils is very low and almost absent in terms of living biomass and no emissions are reported or expected from these areas.

8.9 Fires

Forest fires are very seldom in Denmark and only occur as wildfires. An average between 0 and 2 ha is burned per year. Controlled burning of heathland

to maintain the heath is carried out by the Danish Nature Agency, who also collect data on both wild and controlled fires. Around 300 ha have been burned annually over the last 20 years. These very small areas are not assumed to have any influence on the C stock of living biomass as regeneration takes place very fast. The emission factors for CH₄ and N₂O are taken from the 2006 IPCC Guidelines. The emissions are negligible at 0.005 kt CO₂e in 2024 and 0.03 in 2030-2050, projected based on the assumption of 300 ha of heathland being burned annually. They are included in Forest land and for heath in Grassland in Table 8.2.

8.10 Harvested Wood Products

The category Harvested Wood Products (HWP) covers C stored in wood products in the categories sawn wood, wood-based panels and paper. Since 1990 the category has mostly been a small sink of C. The historical and projected emissions are reported by IGN in Nord-Larsen et al. (2025) and Johannsen et al. (2022) respectively.

8.11 Emission

The total emissions from all sources from 1990 to 2050 were shown in Table 8.2 and Figure 8.1.

The overall picture of the LULUCF sector was a net source of 6440 kt CO₂e in 1990. In 2024, the estimated emission had been reduced to a net sink of 116 kt CO₂e, increasing to be a net source 727 kt CO₂e in 2030 and then converted into a net sink due to the reduced emission from the drained organic soils and a net uptake of CO₂ in the Danish forest.

Because Denmark has a high share of agricultural land, most LUCs are from CL to other land use categories. CL has higher C stock of living biomass compared to most land use categories, except for FL and conversion of CL into other categories with a lower amount of living biomass like urban areas, will therefore cause an overall loss of C in living biomass. These loss/gains are only occurring when land use changes occur and play only a limited role in the overall emission estimates.

Increasing the input of organic matter into the agricultural soils is difficult, because out of an increased carbon input from extra crop residues only 10-15 % of the annual input will add to the SOC, while the remaining will degrade very rapidly and return to the air as CO₂. An increased organic matter input to the mineral soils is therefore most likely if extra crops can be grown such as catch crops or more systematic changes of the existing crop pattern into other crop types like switching from spring cereals to more biomass producing winter cereals or more grass in the crop rotation.

Growing of energy crops will only have marginal effect on the emissions in the LULUCF sector, as only small amounts of C will be stored temporarily in the energy crops before it is harvested.

8.12 Recalculations

Recalculations have been made in all sectors due to updated parameters and other settings. See the relevant sections.

8.13 Uncertainty

The emission uncertainty estimates are very high as the LULUCF sector is dealing with biological processes. If the emission factors are kept constant for the whole time series, the uncertainty estimates are low to medium.

A further increase in the carbon stock in mineral agricultural soils will be difficult to obtain without a substantial change from annual crops to grass in rotation.

The highest inter-annual uncertainty relates to the use of the dynamic model for estimating the degradation of Soil Organic Matter, C-TOOL. The input data depends on actual harvest yields and the degradation on future temperature regimes in combination with a low annual change compared to a very large C stock in the soil. The total C stock in the agricultural mineral soils has been estimated to approximately 312 Tg C, which is equivalent to 1 100 million tonnes of CO₂. Even small changes in the parameters may change the emission prediction substantially. The average temperature in Denmark was very high in 2006-2008 whereas the average temperature decreased in 2009 and 2010 (Figure 8.5). This difference in temperature has an impact on the modelled outcome from C-TOOL. The effect of the cold winter in 2009 could be seen directly in the reported inventory on the emission from agricultural soils. Similarly, the very high summer temperatures of 2018 caused relatively high emissions from agricultural soils. A high uncertainty should therefore be expected for the emission estimate from especially mineral agricultural soils. The uncertainty for the organic soils mainly relates to the uncertainty on the estimate of the absolute emission factor used for these soils. Changes between years are therefore due to actual changes in how the land is utilized.

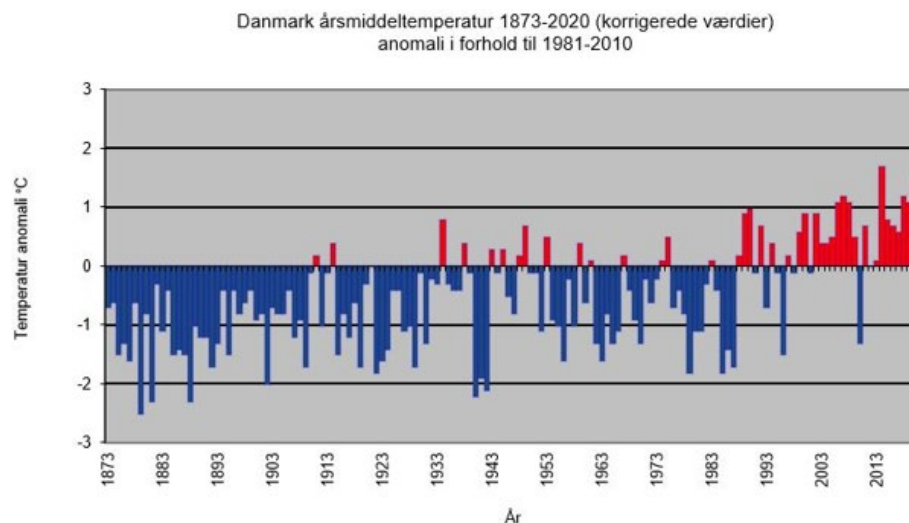


Figure 8.5 Annual change in temperature in Denmark 1873 to 2020 in relation to 1981-2010 (Cappelen, 2020).

8.14 The Danish commitment under the European Union in the second compliance period up until 2030

The Danish emission reduction commitment under the European Union for the LULUCF sector is laid down in EU regulation 2018/841 (European Union, 2018). This regulation has been updated in 2023 in EU regulation 2023/839 (European Union, 2023). The original reduction commitment in 2018/841 was based on the base year average emission of 2005-2009 covering the forest sector, cropland and grassland in 2021-2025 and inclusion of wetlands in 2026-

2030. The updated 2023/839 regulation (European Union, 2023) is unchanged for the period 2021-2025 and substantially altered for the period 2026-2030. As this section is about the 2030 target, the first compliance period of 2021-2025 is not covered here.

The 2023/839 regulation has changed the base year to the average of years 2016-2018 and now includes all LULUCF sectors, instead of only FL, CL, GL, and WE. Furthermore, reduction targets have been set for all EU member states. The total EU reduction commitment of 310 million kt CO₂e is split between the member states in Annex III of the updated regulation (European Union, 2023). In Annex III Denmark has a reduction commitment of 441 kt CO₂e in the LULUCF sector from average 2016-2018 to 2030 following a linear trajectory path from 2022. This means that the average 2016-2018 emissions level of 1207 kt CO₂e must decrease to 766 kt CO₂e in 2030, following a linear trajectory that determines a budget of allowed emissions between 2026-2029. If the accumulated budget is not met, the reduction commitment for 2030 is increased. The new regulation has included a multiplier for the target which will be calculated in the following way: “108 % of the gap between a Member State’s budget for 2026 to 2029 and the corresponding net removals reported will be added to the figure reported for 2030 by that Member State” (European Union, 2023).

The total projected Danish emissions for the LULUCF sector are shown in Figure 8.6 and Table 8.7.

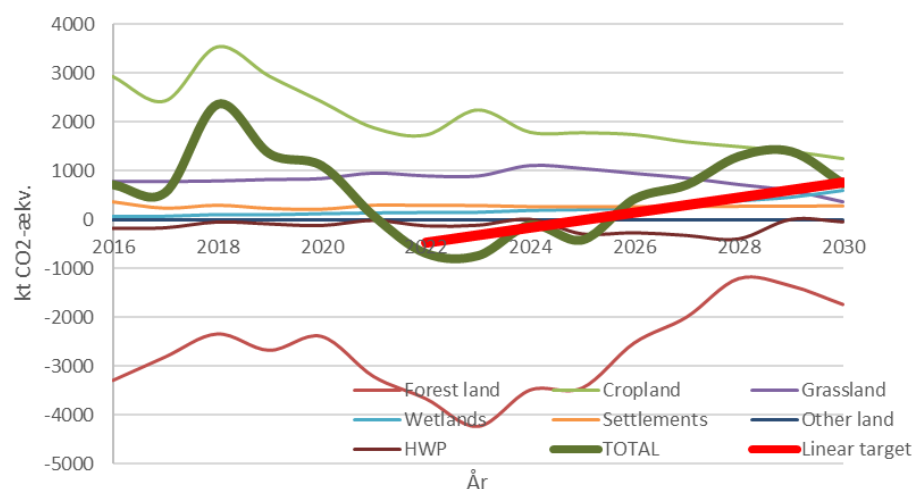


Figure 8.6 Reported and projected emissions from 2016 to 2030 for the LULUCF sector displayed along with the linear target (red line) necessary to meet EU commitments for the compliance period 2026 - 2030.

As can be seen from Figure 8.6 and Table 8.7, Denmark will likely fulfil its EU reduction commitment with the current projection, as emissions are projected to follow the linear trajectory in 2026-2029.

Table 8.7 Historical average for 2016-2018 and emission for the LULUCF sector in 2024 and projected for 2026-2030 in kt CO₂e per year.

Land Accounting Categories	Base year average 2016-2018	2024	2026	2027	2028	2029	2030
Forest land	-2 806	-3 480	-2 515	-1 990	-1 201	-1 349	-1 728
Cropland	2 961	1 788	1 739	1 590	1 493	1 396	1 248
Grassland	789	1 107	949	854	723	600	372
Wetlands	90	196	244	301	389	462	598
Settlements	301	265	263	268	272	276	281
Harvested Wood Products	0	0	0	0	0	0	0
Projected Net TOTAL	-127	8	-260	-315	-383	5	-44
Linear target line		-116	420	708	1293	1390	727
Projected target gap		-154	152	306	459	612	766

8.15 References

Adhikari, K., Bou Kheir, R., Greve, M.B., Bøcher, P.K., Malone, B.P., Minasny, B., McBratney, A.B., Greve, M.H. 2013. High-Resolution 3-D Mapping of Soil Texture in Denmark. Soil Sci. Soc. Am. J 77, doi:10.2136/sssaj2012.0275.

Beucher, A., Weber, P.L., Hermansen, C., Pesch, C., Koganti, T., Møller A.B., Gomes, L., Greve, M. & Greve, M.H. 2023. Updating the Danish peatland map with a combination of new data and modelling approaches. Advisory report from DCA – Danish Centre for Food and Agriculture, Aarhus University, 66 pages. Submitted 19.12.2023.

Cappelen, J. (ed) 2020: Danmarks klima 2020 - with English Summary, DMI rapport, Available at: <https://www.dmi.dk/klima/temafor-side-klimaet-frem-til-i-dag/temperaturen-i-danmark/>

SGAV, 2026a: Forudsætninger fra Landbrugsstyrelsen til Klima-, Energi- og Forsyningsministeriet og DCE's brug ifm. KF26. Not published.

DSt, 2026. AF5: Cultivated area by region, unit and crop. Available at: <https://www.statistikbanken.dk/statbank5a/default.asp?w=1920>

Elsgaard, L. 2024. Dokumentationsnotat vedr. forskningsprojekter om analyse af danske emissionsdata (>12 pct. OC) samt relation mellem emission fra jorder med 6-12 pct. OC og >12 pct. OC. DCA – Danish Centre for Food and Agriculture, Aarhus University. Pp 7.

European Union, 2018: Regulation (EU) 2018/841 of the European Parliament and of the Council of 30 May 2018 on the inclusion of greenhouse gas emissions and removals from land use, land use change and forestry in the 2030 climate and energy framework, and amending Regulation (EU) No 525/2013 and Decision No 529/2013/EU (Text with EEA relevance). Available at: <https://eur-lex.europa.eu/legal-content/EN/TXT/HTML/?uri=CELEX:32018R0841>

European Union, 2023: REGULATION (EU) 2023/839 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 19 April 2023 amending Regulation (EU) 2018/841 as regards the scope, simplifying the reporting and compliance rules, and setting out the targets of the Member States for 2030, and Regulation (EU) 2018/1999 as regards improvement in monitoring, reporting, tracking of progress and review. Available at: <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:32023R0839>

GPT, 2024, Green deal act. <https://regeringen.dk/nyheder/2024/bred-politisk-aftale-om-den-groenne-trep-art-indgaaet-den-stoerste-forandring-af-det-danske-landskab-i-over-100-aar/>

Greve, M.H., Greve, M.B., Christensen, O.F., Bou-Kheir, R., 2011. Mapping of the organogenic soils on agricultural land. Final report, SINKs (DP6).

Greve, M.H., Christensen, O.F., Greve, M.B. & Kheir, R.B. 2014: Change in Peat Coverage in Danish Cultivated Soils During the Past 35 Years, Soil Science, May 2014 - Volume 179 - Issue 5 - p 250–257.

Gyldenkerne, S., Callisen, L.W., Greve, M.H., Beucher, A.M., Weber, P.L., Elsgaard, L., Lærke, P.E., Stisen, S., Koch, J. & Levin, G. 2025. Opgørelse af CO₂-emissioner fra organiske jorde. Aarhus Universitet, DCE – Nationalt Center for Miljø og Energi, 29 s. Fagligt notat nr. 2025 | 01

IPCC, 2006: 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Available at: <https://www.ipcc-nggip.iges.or.jp/public/2006gl/>

IPCC, 2014: 2013 Supplement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories: Wetlands. Available at: <http://www.ipcc-nggip.iges.or.jp/public/wetlands/index.html>

IPCC, 2019: 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Calvo Buendia, E., Tanabe, K., Kranjc, A., Baasansuren, J., Fukuda, M., Ngarize S., Osako, A., Pyrozhenko, Y., Shermanau, P. and Federici, S. (eds). Available at: <https://www.ipcc-nggip.iges.or.jp/public/2019rf/vol4.html>

Levin, G. & Gyldenkerne, S. 2022: Estimating Land Use/Land Cover and Changes in Denmark. Technical documentation for the assessment of annual land use/land cover and changes since 2011. Aarhus University, DCE – Danish Centre for Environment and Energy, pp 39. Technical Report No. 227. Available at: <http://dce2.au.dk/pub/TR227.pdf>

Levin G., Blemmer M., Gyldenkerne S., Johannsen, V. K., Caspersen, O. H., Petersen, H. S., Nyed, P. K., Becker T., Bruun, H. G., Fuglsang, M., Münier, B., Bastrup-Birk, A. & Nord-Larsen T. 2014: Estimating Land Use/Land Cover Changes in Denmark from 1990 – 2012. Technical documentation for the assessment of land use/land cover changes for estimation of carbon dioxide fixation in soil. Aarhus University, DCE – Danish Centre for Environment and Energy. Technical Report No. 38. Available at: <https://dce2.au.dk/pub/TR38.pdf>

MiljøGIS, 2025: maps published by the Danish Environmental Protection Agency, a part of Ministry of Environment of Denmark. Available at: <https://miljoegis3.mim.dk/spatialmap?profile=vandprojekter>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrechtsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Andersen, T.A., Tougaard, S.L., Arendal, L. S. H., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott Bentsen, N., Baunbæk, L., & Hansen, M.G. 2026. Denmark's National Inventory Document 2026. Emission Inventories 1990-2024 - Submitted under the United Nations Framework Convention on Climate Change and the Paris Agreement. Aarhus University, DCE – Danish Centre for Environment and Energy, 955 pp. Available at:

https://envs.au.dk/fileadmin/envs/Emission_inventories/DENMARKS_NATIONAL_INVENTORY_DOCUMENT_TO_UNFCCC.pdf

Nord-Larsen, T., Riis-Nielsen, T., Thomsen, I. M., Bentsen, N. S., Jørgensen, B. B., Bastrup-Birk, A., & Johannsen, VK., 2025, Skovstatistik 2023. Available at https://curis.ku.dk/ws/portalfiles/portal/447618920/Rapport_Skovstatistik_2023_web.pdf

Thomas Nord-Larsen, Prescott Huntley Brownell II, and Vivian Kvist Johannsen (2025): Forest carbon pool projections - 2025, Department of Geoscience and Natural Resource Management, University of Copenhagen, Frederiksberg. Available at:

https://curis.ku.dk/ws/portalfiles/portal/450161427/ForestCarbonPool-Projections_2025_web.pdf

Olesen, M., Madsen, K.S., Ludwigsen, C.A., Boberg, F., Christensen, T., Cap-pelen, J., Christensen, O.B., Andersen, K.K., and Christensen, J.H. 2014: Fremtidige klimaforandringer i Danmark www.dmi.dk/klimaforandringer Danmarks Klimacenter rapport nr. 6 2014. Available at: <https://orbit.dtu.dk/en/publications/fremtidige-klimaforandringer-i-danmark>, pp35.

Taghizadeh-Toosi, A. 2015: C-TOOL: A simple tool for simulation of soil carbon turnover. Technical Report. AGRO, Aarhus University.

9 Conclusions

In assessing the projection, it is valuable to separate the emissions included in the EU ETS and hence the current projection provides a separate projection of the CO₂ emissions covered by the EU ETS. The CO₂ emissions covered by EU ETS are shown for selected years in Table 9.1. Detailed tables containing the projected emissions are available at:

<http://envs.au.dk/videnudveksling/luft/emissioner/emissioninventory/>

The historic and projected GHG emissions are shown in Figure 9.1. Projected GHG emissions include the estimated effects of policies and measures implemented or decided as of December 2025 and the projection of total GHG emissions is therefore a so-called ‘with existing measures’ projection also called ‘frozen policy’.

The main emitting sectors in 2024 are Energy industries (17 %), Transport (29 %), Agriculture (31 %) and Other sectors (8 %). For the latter sector, the most important sources are fuel combustion in the residential sector. GHG emissions show a decreasing trend in the projection period. The total emissions in 2024 are estimated to be 36.6 million tonnes CO₂ equivalents including LULUCF and indirect CO₂ and the corresponding total in 2050 is projected to be 10.5 million tonnes CO₂ equivalents. From 1990 to 2024 the emissions decreased by 52.3 %. From 2024 to 2050, the emission is projected to decrease by approximately 71 %.

The total greenhouse gas emissions in 1990 including LULUCF and indirect CO₂ are estimated at 78.5 million tonnes of CO₂ equivalents and the emission in 2030 is projected to be 25.5 million tonnes of CO₂ equivalents including LULUCF and indirect CO₂ corresponds to a reduction of 67.5 % between 1990 and 2030. The effect of carbon capture and storage (CCS) in the projection is not attributable to any sector and not included in this figure.

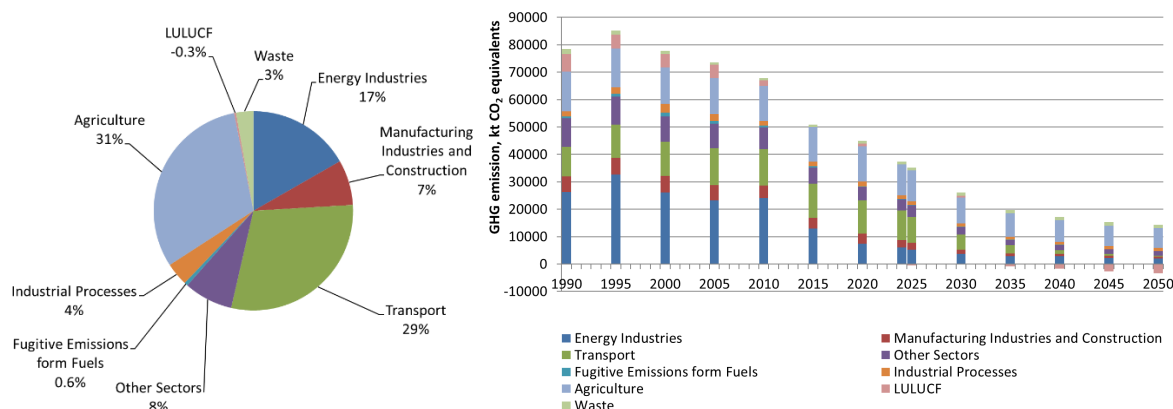


Figure 9.1 Total GHG emissions in CO₂ equivalents. Distribution according to main sectors (2024) and time series for 1990 to 2050.

9.1 Stationary combustion

Stationary combustion includes Energy industries, Manufacturing industries and construction and Other sectors. Other sectors include combustion in commercial/institutional, residential and agricultural plants. The GHG emissions in 2024 from the main source, which is public power and heat production (45 %), are estimated to decrease in the period from 2024 to 2050 (64 %) due

to a significant decrease in the fossil fuel consumption for electricity production in the later part of the time series. For residential combustion plants, a significant decrease in emissions is also projected; the emissions are expected to decrease by 91 % from 2024 to 2050, due to a lower consumption of fossil fuels. Emissions from manufacturing industries decrease by 80 %, also due to a decrease in fossil fuel combustion.

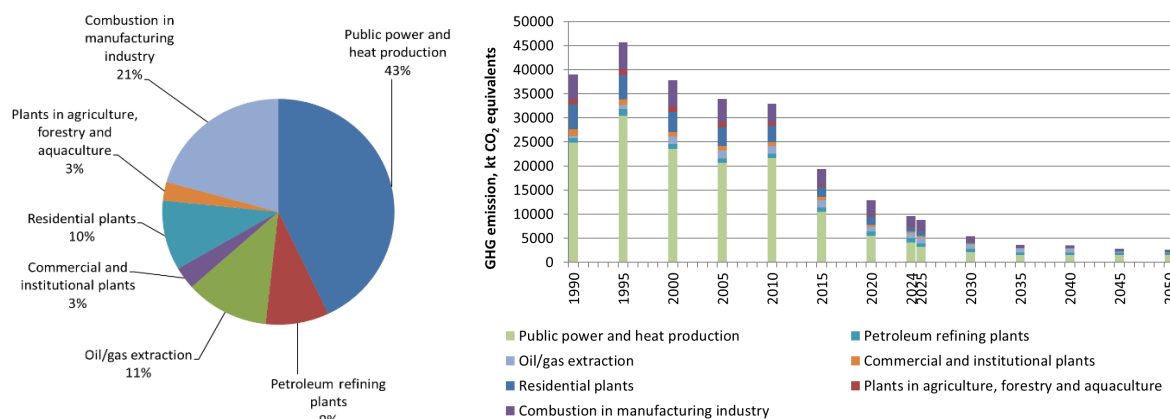


Figure 9.2 GHG emissions in CO₂ equivalents for stationary combustion. Distribution according to sources (2024) and time series for 1990 to 2050.

9.2 Fugitive emissions from fuels

The greenhouse gas emissions from the sector "Fugitive emissions from fuels" show large fluctuations in the historical years 1990-2024, due to emissions from exploration, which occur only in some years with varying amounts of oil and gas flared. Emissions from exploration are not included in the projection, as no projected activity data are available. Emissions are estimated to decrease in the projection period 2024-2050 by 82 %. The emissions from flaring are increasing in the first part of the projection period due to restart of production at the Tyra field after renovation. However, the emissions decrease again. Emissions from extraction of oil and natural gas are estimated to decline over the projection period due to the expectation of a decrease of extracted amounts of natural gas. Emissions of greenhouse gases from other sources are estimated to be constant or nearly constant over the projection period.

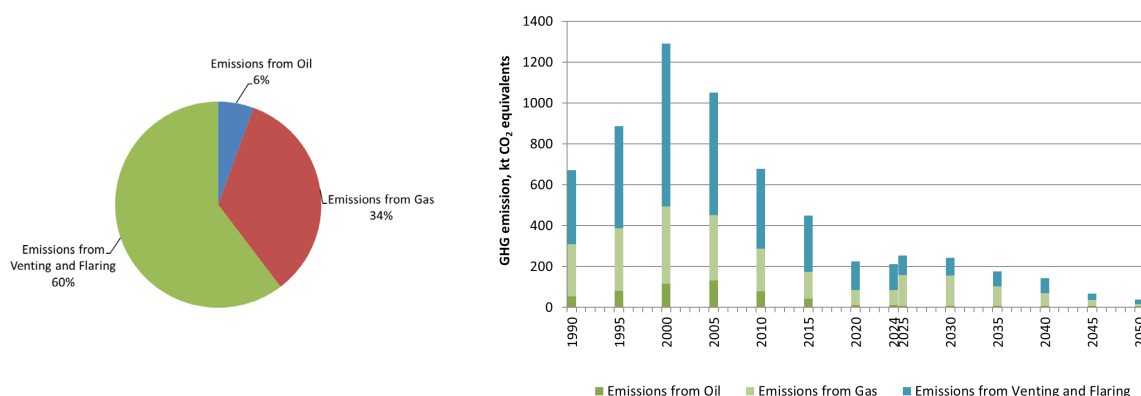


Figure 9.3 GHG emissions in CO₂ equivalents for fugitive emissions. Distribution according to sources for 2024 and time series for 1990 to 2050.

9.3 Industrial processes and product use

The GHG emission from industrial processes and product use (IPPU) increased during the nineties, reaching a maximum in 2000. Closure of a nitric acid/fertiliser plant in 2004 has resulted in a considerable decrease in the

GHG emission. The most significant sources of GHG emission in 2024 are mineral industry (mainly cement production) with 69 % and use of substitutes (F-gases) for ozone depleting substances (ODS) (20 %). The corresponding shares in 2050 are expected to be 86 % and 0 %, respectively. Consumption of limestone and the emission of CO₂ from flue gas cleaning are assumed to follow the consumption of coal and waste for generation of heat and power. The GHG emissions from the IPPU sector will continue to be strongly dependent on the cement production at Denmark's only cement plant.

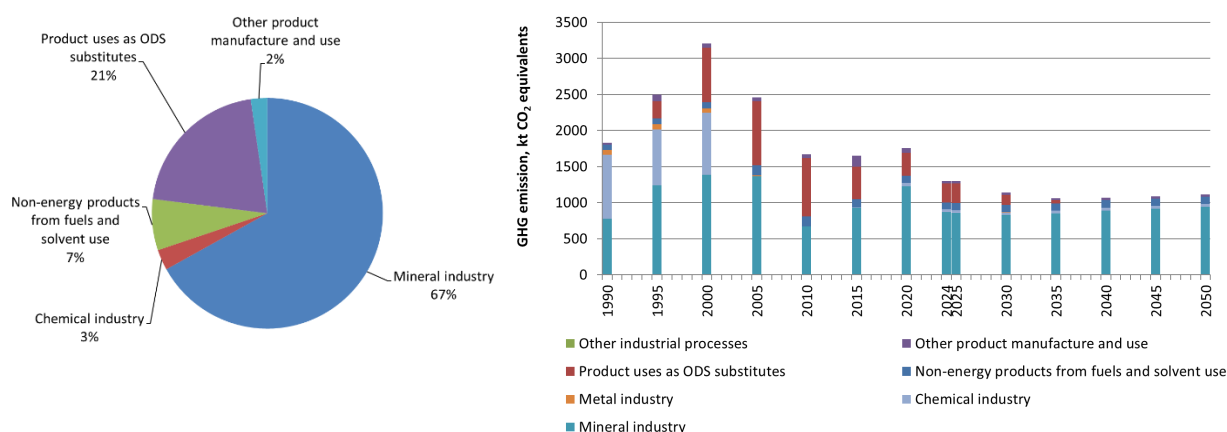


Figure 9.4 Total GHG emissions in CO₂ equivalents for industrial processes. Distribution according to main sectors (2024) and time series for 1990 to 2050.

9.4 Transport and other mobile sources

Road transport is the main source of GHG emissions from transport and other mobile sources in 2024 (79 %) and emissions from this source are expected to decrease in the projection period to 2050, but with the largest reduction happening after 2030. The emission shares for the remaining mobile sources (e.g. domestic aviation, national navigation, railways, fishing and non-road machinery in industry, households and agriculture) are small compared with road transport. Non-road machinery in agriculture, forestry and fishing contributes 8 % of the sectoral GHG emission in 2024.

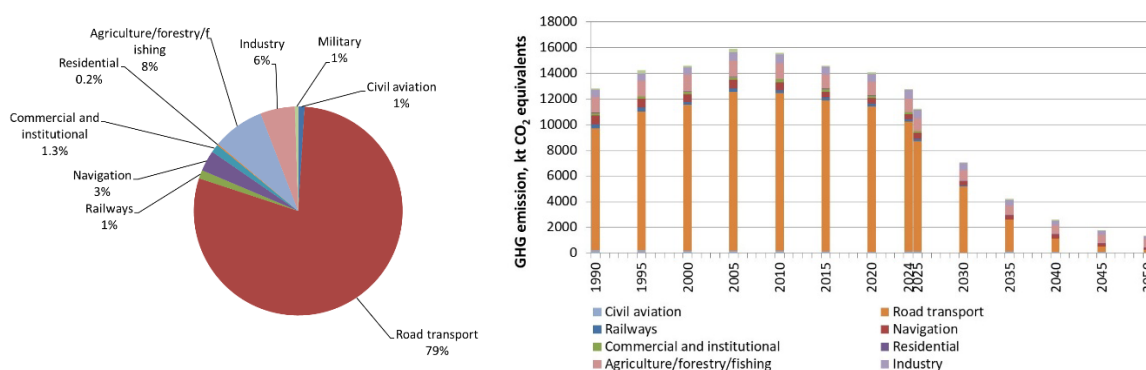


Figure 9.5 GHG emissions in CO₂ equivalents for mobile sources. Distribution according to main sources (2024) and time series for 1990 to 2050.

9.5 Agriculture

The main sources in 2024 are agricultural soils (33 %), enteric fermentation (34 %) and manure management (31 %). The corresponding shares in 2050 are expected to be 36 %, 37 % and 25 %, respectively. From 1990 to 2024, the emission of GHGs in the agricultural sector decreased by 22 %. From 2024 to 2050, the emissions are expected to decline by about 36 %. The reduction in the historical years (1990-2024) can mainly be explained by improved utilisation of

nitrogen in manure, a significant reduction in the use of fertiliser and a reduced emission from N-leaching. Measures in the form of technologies to reduce emissions in housing and manure storage and emission reducing feed additives are considered in the projections.

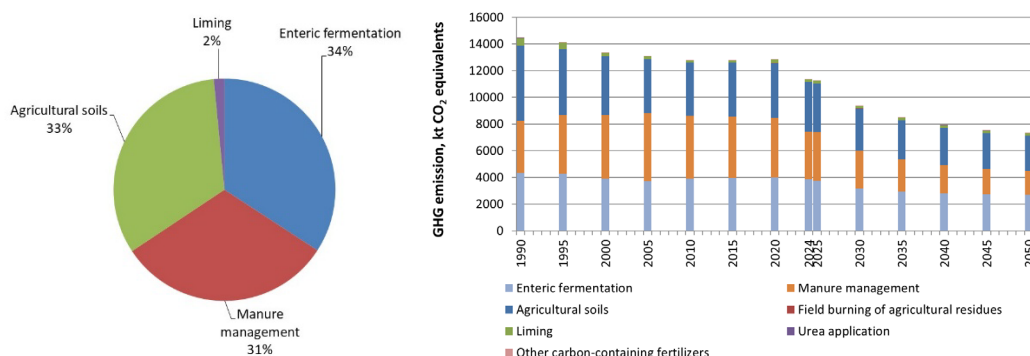


Figure 9.6 GHG emissions in CO₂ equivalents for agricultural sources. Distribution according to main sources (2024) and time series for 1990 to 2050.

9.6 Waste

The total GHG emission from the waste sector has been decreasing in the years 1990 to 2024 by 38 %. From 2024 to 2050, the emissions are projected to increase by 16 % driven by a significant increase in emissions from anaerobic digestion. Historically, solid waste disposal has been the largest contributor of GHG emission in the waste sector, but emissions from the source are decreasing and will decrease by another 28% from 2024-2050. In 2024, the most significant source category in the waste sector is anaerobic digestion (41%) and this picture will continue in the future (52 % by 2050). Emissions from wastewater, composting and other (accidental fires) are expected to be rather constant for the projection period. GHG emissions from these three source categories in 2025-2050 contribute with 17-18 %, 10-12 % and 9-10 % respectively.

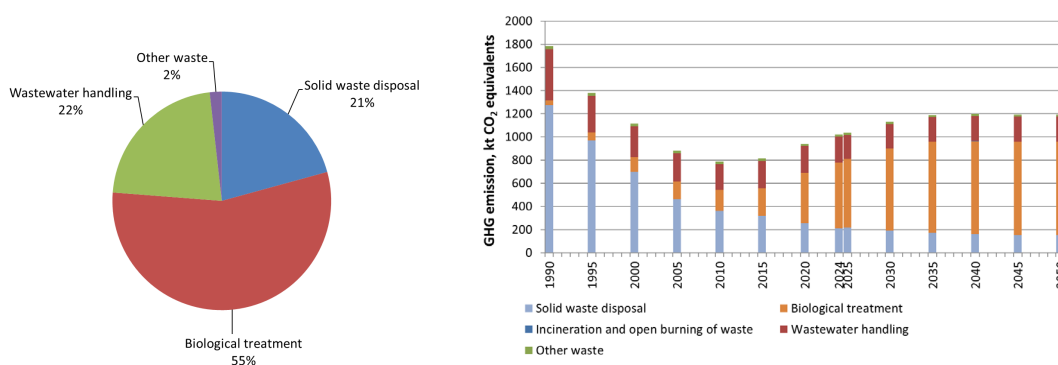


Figure 9.7 GHG emissions in CO₂ equivalents for Waste. Distribution according to main sources (2024) and the time series for 1990 to 2050.

9.7 LULUCF

The LULUCF sector cover emissions and removals from land use, land use change and forestry. This includes conversions between Forest land (afforestation and deforestation), Cropland, Grassland, Wetlands, Settlement and Other land. The minor emission sources Harvested Wood Products (HWP) and burning of biomass in fires are also part of LULUCF. The work for this report includes the projection of Cropland, Grassland, Wetland, Settlement and Other land. Projection of Forestry and Harvested wood products (HWP)

is conducted by Department of Geosciences and Natural Resource Management (IGN), Copenhagen University, and reported separately. The data included here are updated values for 2024 to 2050 received from IGN. The LULUCF sector excl. forestry and HWP is a net source of emissions in both the historical and projection period. Forestry and HWP are both net sinks and counter emissions lowering the net emissions from the entire LULUCF sector and even resulting in an overall sink. The combined emissions of the LULUCF sector were 6440 kt CO₂ equivalents in 1990 and reduced to a sink of 116 kt CO₂ equivalents in 2024. In 2030, a small net source of 727 kt CO₂ equivalents is estimated. From 2030 and up to 2050 is estimated a combined large sink of up to 3400 kt CO₂ equivalents due to less drained organic soils emitting CO₂ and a further increase in the amount of C stored in the Danish forests.

9.8 EU ETS

CO₂ emissions covered by EU ETS are from the energy sector and from industrial processes. From 2012, aviation is included in EU ETS, but otherwise only CO₂ emissions from stationary combustion plants are included under fuel combustion, hence the category Agriculture, forestry and aquaculture refer to stationary combustion within this sector. The major part of industrial process CO₂ emissions is covered by EU ETS. It is dominated by cement production and other mineral products. The results of the projection for EU ETS covered emissions are shown in Table 9.1.

Table 9.1 CO₂ emissions covered by EU ETS.

	2025	2030	2035	2040	2045	2050
Public electricity and heat production	2 802	1 982	1 347	1 348	1 343	1 339
Petroleum refining	757	629	567	567	567	567
Other energy industries (oil/gas extraction)	1 139	868	820	767	169	1
Combustion in manufacturing industry	1 189	744	499	416	395	322
Domestic aviation	126	50	103	83	73	37
Agriculture, forestry and aquaculture	1	0	0	0	0	0
Fugitive emissions from flaring	86	77	66	65	27	18
Mineral industry	855	827	848	890	913	942
Total	6 954	5 176	4 249	4 136	3 487	3 226
Civil Aviation, international	2 827	2 764	2 309	1 871	1 635	829

PROJECTION OF GREENHOUSE GASES 2025-2050

This report contains a description of models, background data and projections of CO₂, CH₄, N₂O, HFCs, PFCs and SF₆ for Denmark. The emissions are projected to 2050 using a 'with measures' scenario. Official Danish projections of activity rates are used in the models for those sectors for which projections are available, e.g. the latest official projection from the Danish Energy Agency. The emission factors refer to international guidelines, and some are country-specific and refer to Danish legislation, Danish research reports or calculations based on emission data from a considerable number of industrial plants. The projection models are based on the same structure and method as the Danish emission inventories in order to ensure consistency.